



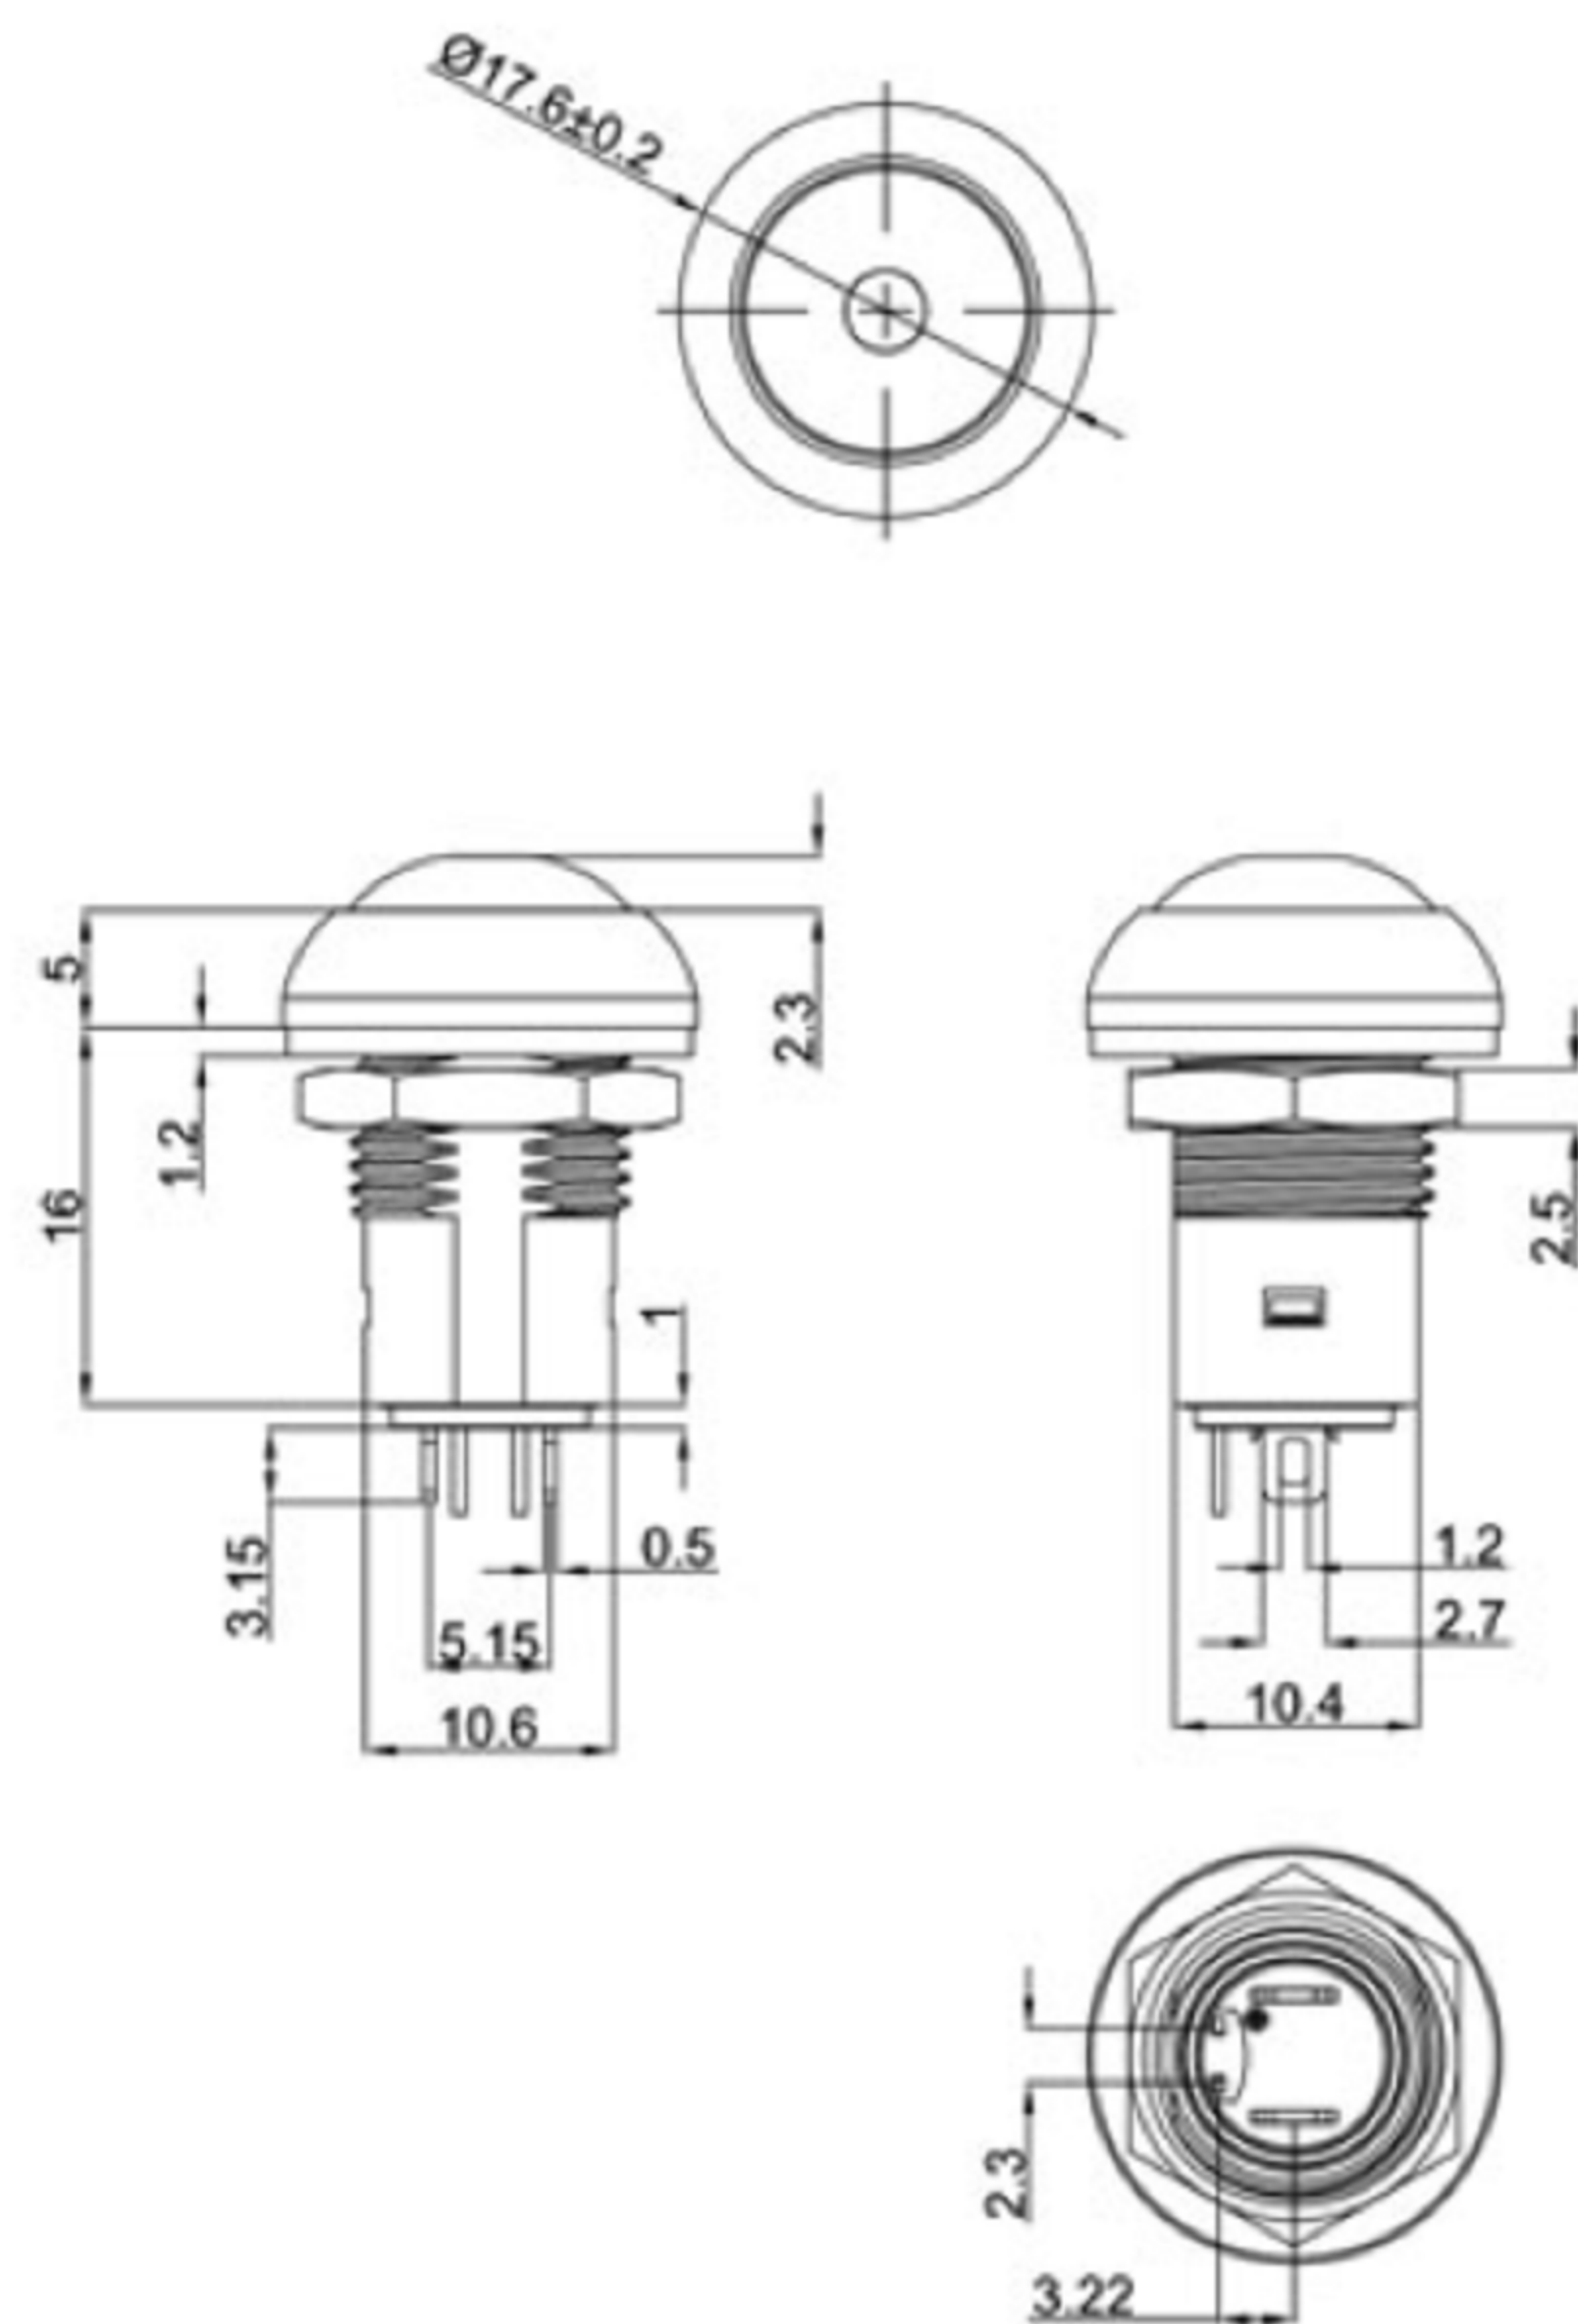


SPECIFICATIONS

Circuit	:SPST
Current rating	:0.1A / 2A
Voltage rating	:24VDC/125VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50mΩ Max
Insulation resistance	:100MΩ Min
Travel	:2.5mm±0.5mm
Operating Force	:300±50gf
Mechanical Life	:Over 100,000 cycles
Electrical Life	:Over 10,000 cycles
Manual Welding	:350°C for 3 seconds
Function	:OFF-ON
Operating temperature	: -20°C ~ +85°C
Level of Protection	: IP65

MATERIAL:

Base: PA66,UL rated:94V-2 Min;
Cap: PA66 ;
Terminal: Copper,Golden plated ;
Nut: Brass, NI Plated .

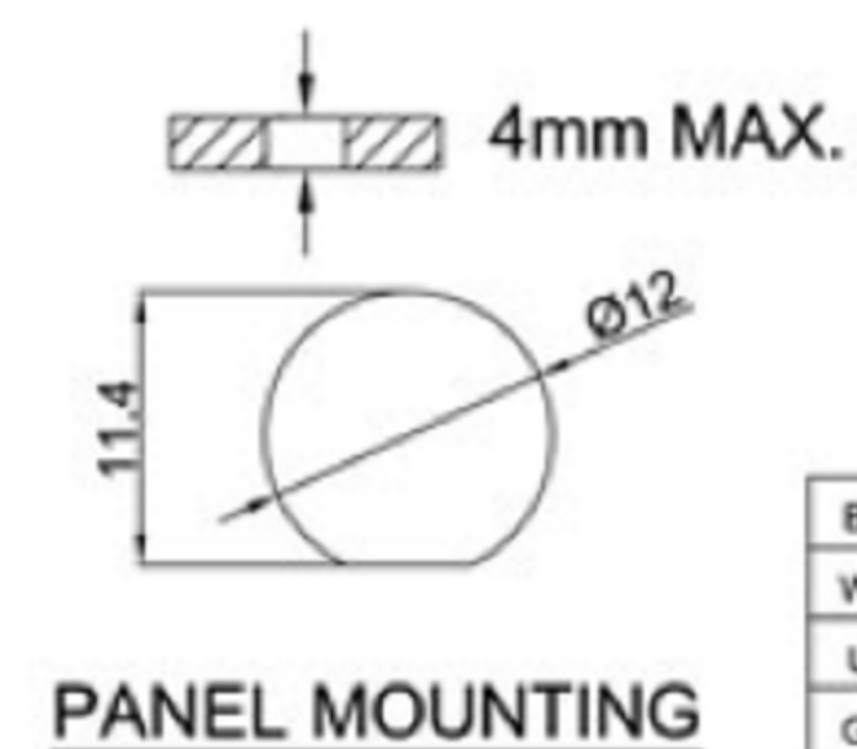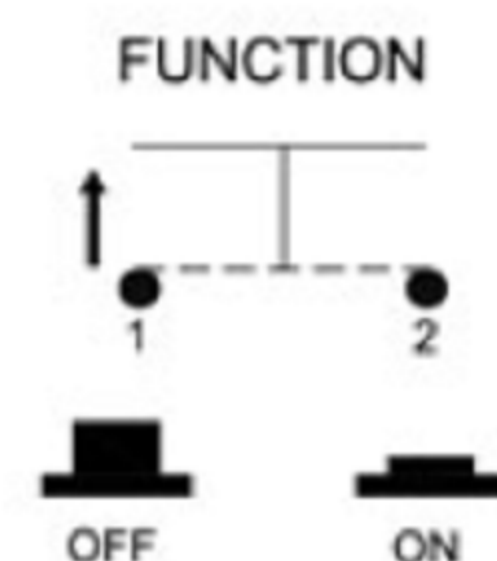

LED SPECIFICATIONS						
U _(SV)	Blue 蓝色	5.0	6.0	7.0	25	100
G _(SV)	Green 绿色	5.0	6.0	7.0	25	100
R _(SV)	Red 红色	5.0	6.0	7.0	25	100
蓝色 U	Blue 蓝色	2.9	3.0	3.4	20	100
白色 Y	Yellow 黄色	1.9	2.2	2.4	20	100
绿色 G	Green 绿色	1.8	2.2	2.4	20	100
红色 R	Red 红色	1.9	2.2	2.4	20	100
白色 W	White 白色	2.9	3.2	3.5	30	100
Cap Color (X)	Clip emitted color (Y)	最小	一般	最大	最大操作电流 (mA)	最大脉冲电流 (mA)
灯的发色色 (Y)	顺向电压 (V)					


Note:
This product is strictly prohibited wave soldering and reflow soldering, please use the manual welding processing, temperature of 350°±5° and time is 3±0.5 seconds;



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 12/27/22
CHECKED BY: Jacky Chen
DATE: 12/27/22
APPROVED BY: Tony Kao
DATE: 12/27/22

MAT'L		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH WITH LED
SCALE	1 : 1	DWG NO.	
SHEET NO.	1 of 1	PART NO.	
		SIZE	A4
		VER	R