
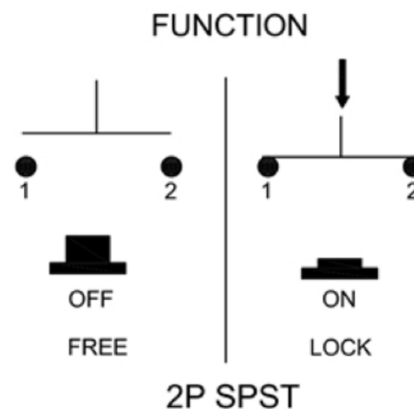
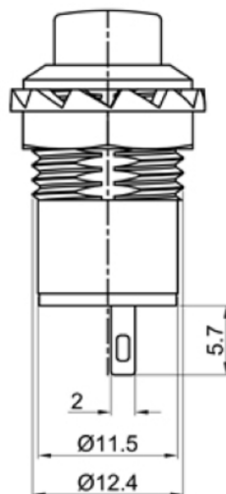


Rating: 3A 125V AC
1.5A 250V AC
Contact Resistance: 20mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC 1000V 1 minute
Operating Force: 450±100g
Travel: 3.0±0.5mm
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: -20°C ~ +85°C
Soldering Temperature: 256°C for 5 Seconds
Function: OFF-ON
Welding method: Manual Soldering (350° C ± 5° C, 3s ± 0.5s)

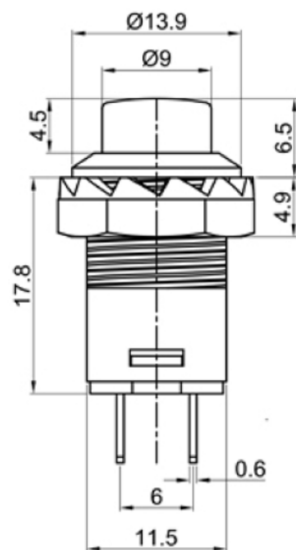

W	白色
B	黑色
G	绿色
Y	黄色
R	红色
上盖颜色 X Cap color X	

 广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
12/27/22
12/27/22
12/27/22

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH WITH LED

SIZE
A4
VER
R