
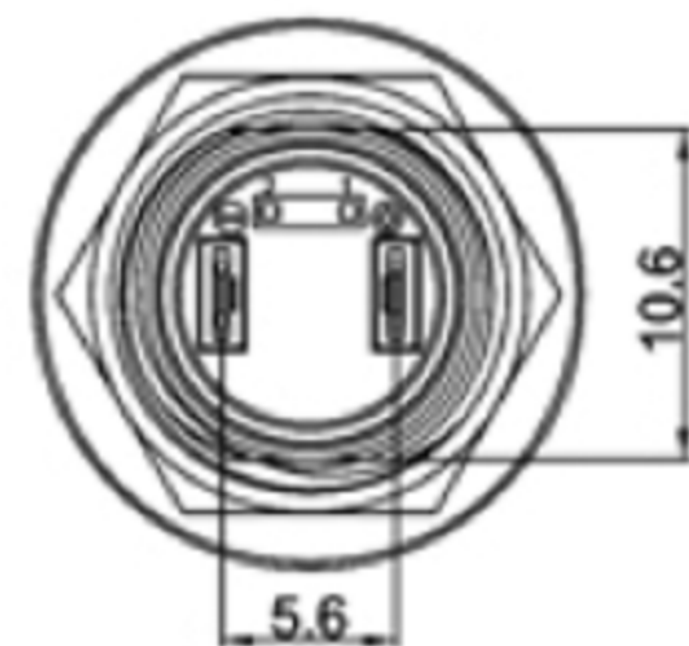
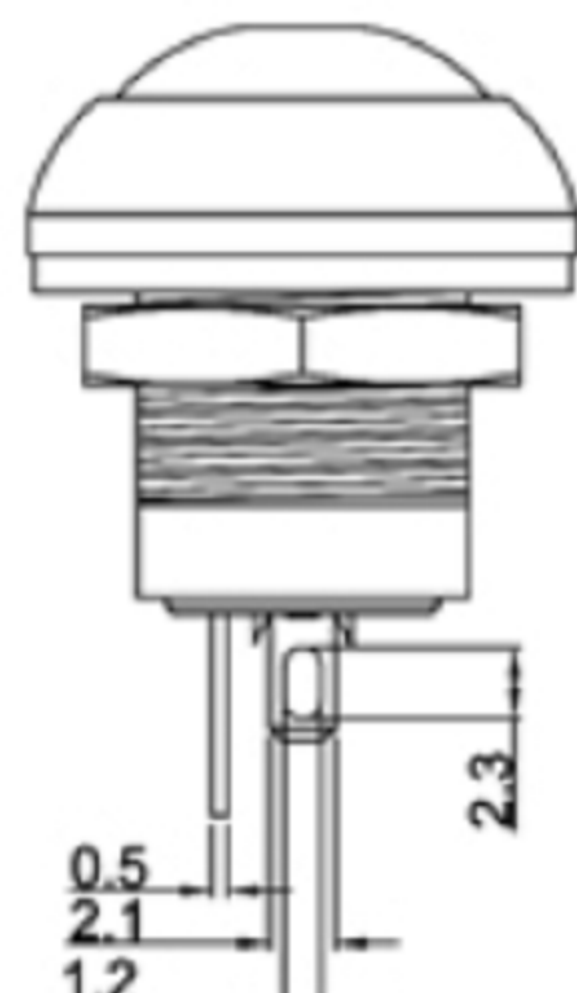
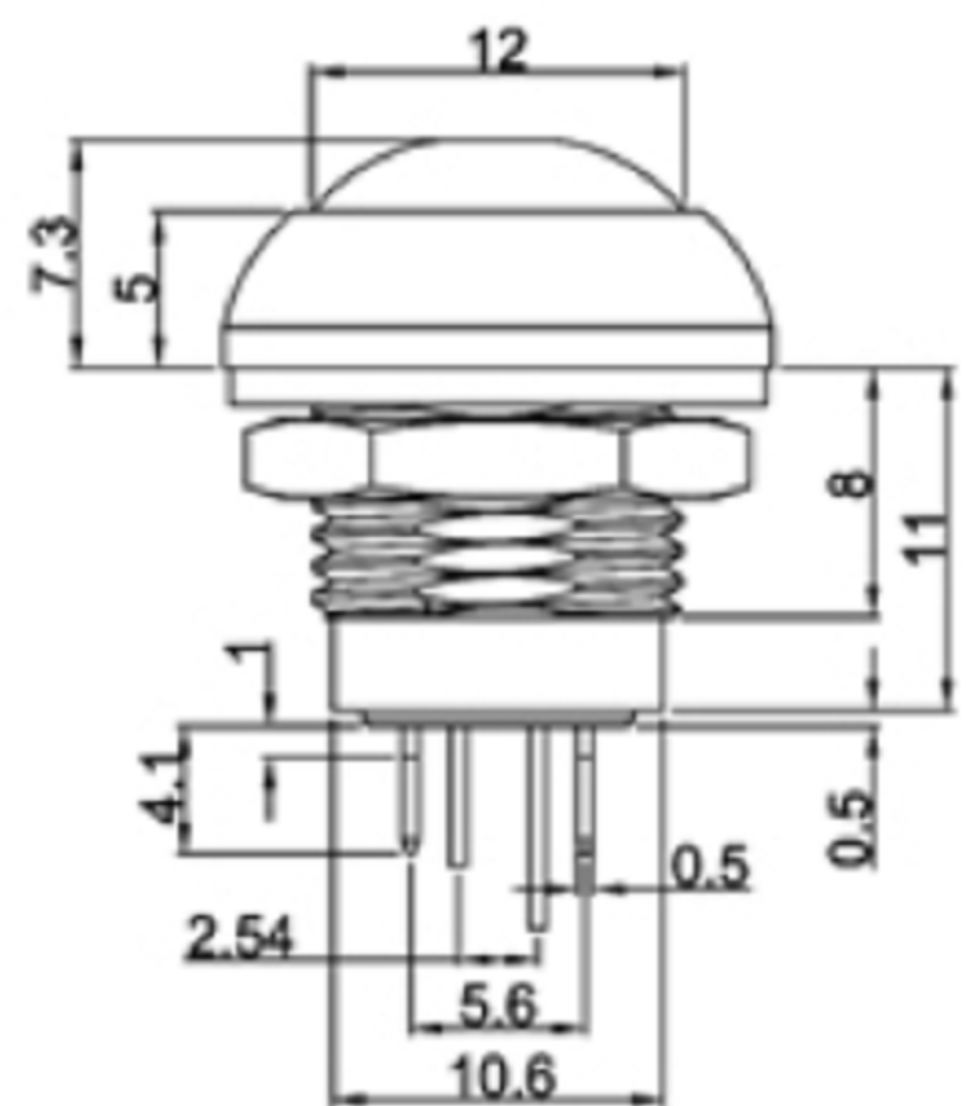
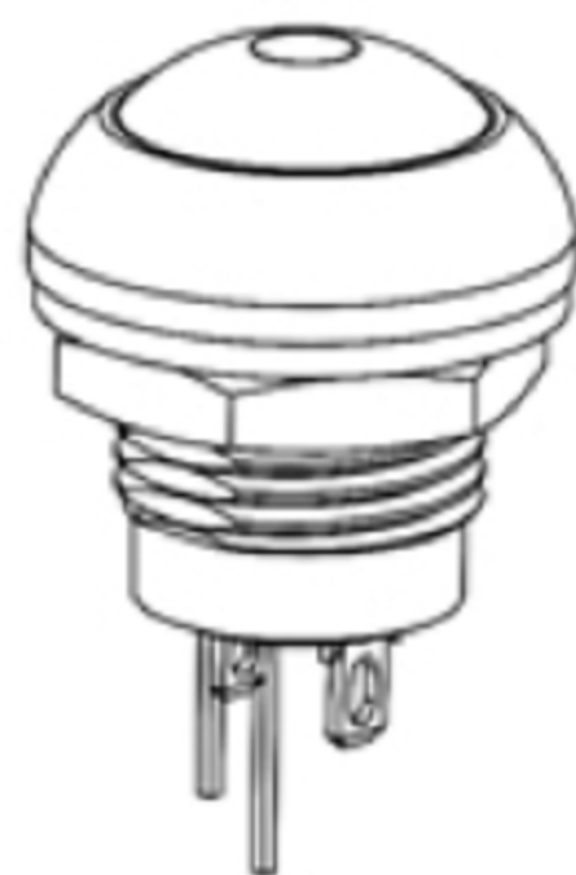


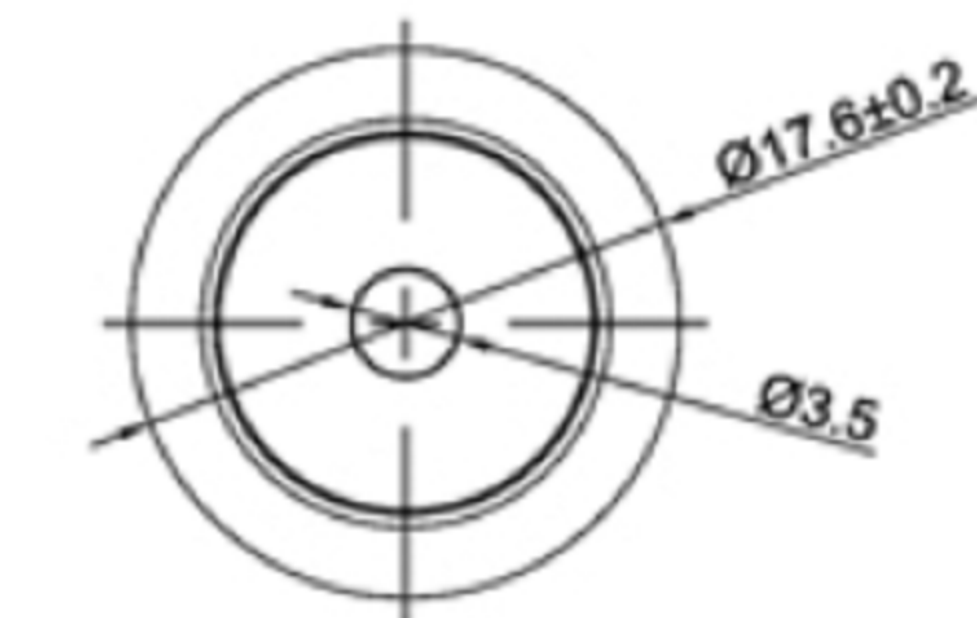


SPECIFICATIONS

Circuit	:SPST
Current rating	:0.2A
Voltage rating	:250VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50mΩ Max
Insulation resistance	:100MΩ Min
Travel	:2.0mm±0.5mm
Operating Force	:500±150gf
Mechanical Life	:Over 200,000 cycles
Electrical Life	:Over 30,000 cycles
Manual Welding	:350°C for 3 seconds
Function	:Momentary
Operating temperature	:-20°C ~ +85°C
Level of protection	:IP65


MATERIAL:

Base: PA66,UL rated:94V-2 Min;
Cap: PA66 ;
Terminal: Copper,Silver plated ;
Nut: Brass, NI Plated .

Circuit Diagram

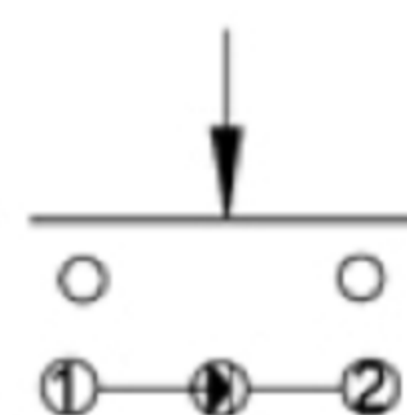

Panel Mounting

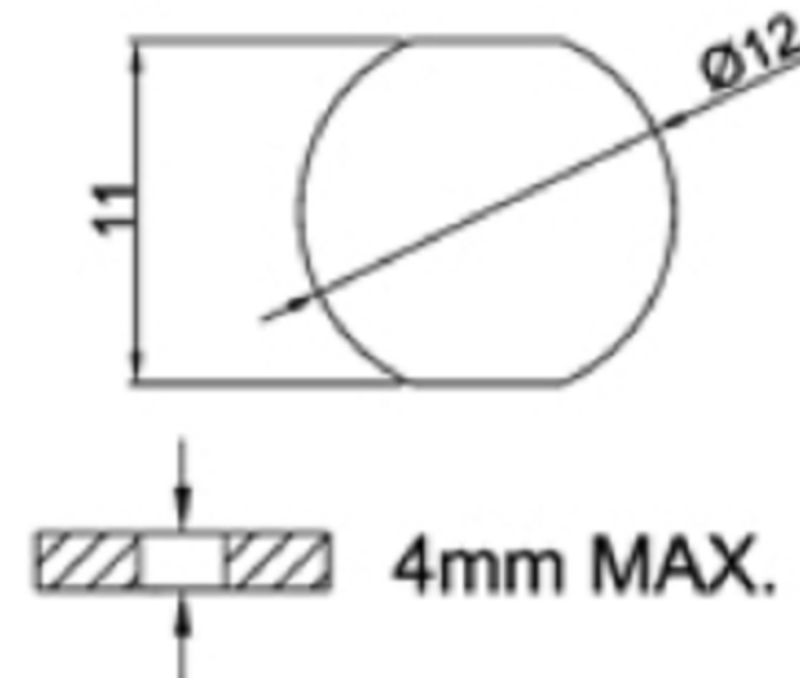

LED SPECIFICATIONS

		LED SPECIFICATIONS						
		U(V)	Blue 蓝色	5.0	6.0	7.0	25	100
		G(V)	Green 绿色	5.0	6.0	7.0	25	100
		R(V)	Red 红色	5.0	6.0	7.0	25	100
B	Black 黑色	U	Blue 蓝色	2.9	3.0	3.4	20	100
W	White 白色	Y	Yellow 黄色	1.9	2.2	2.4	20	100
U	Blue 蓝色	G	Green 绿色	1.8	2.2	2.4	20	100
G	Green 绿色	R	Red 红色	1.9	2.2	2.4	20	100
R	Red 红色	W	White 白色	2.9	3.2	3.5	30	100
Cap Color (X) 上盖颜色 (X)	Clip emitted color (Y) 灯的发光颜色 (Y)	最小	一般	最大	最大操作电流 (mA)	最大脉冲电流 (mA)		
		顺向电压(V)						

Note:


This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 12/27/22

CHECKED BY: DATE

Jacky Chen 12/27/22

APPROVED BY: DATE

Tony Kao 12/27/22

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH WITH LED

SIZE

A4

VER

R