





Rating: 1A 36VDC
1A 125VAC / 0.5A 250VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance: DC 500V 100MΩ Min.
Dielectric Strength: AC 1000V 1 minute
Total travel: 2.0 ± 0.5 mm
Operating Force: 400 ± 100 gf
Electrical Life: 10,000 cycles
Mechanical Life: 20,000 cycles
Operating Temperature: $-20^{\circ}\text{C} \sim 85^{\circ}\text{C}$
Function: OFF - ON

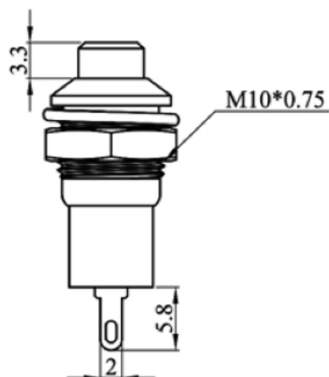

Panel Thickness: 3mm MAX.

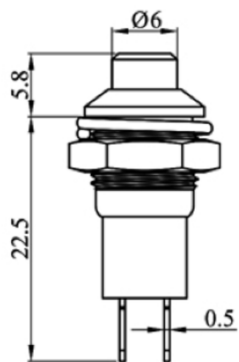

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/27/22
DATE: 12/27/22
DATE: 12/27/22

MAT'L
FINISH
SCALE
SHEET NO.

1 of 1

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH WITH LED

SIZE
A4
VER
R