

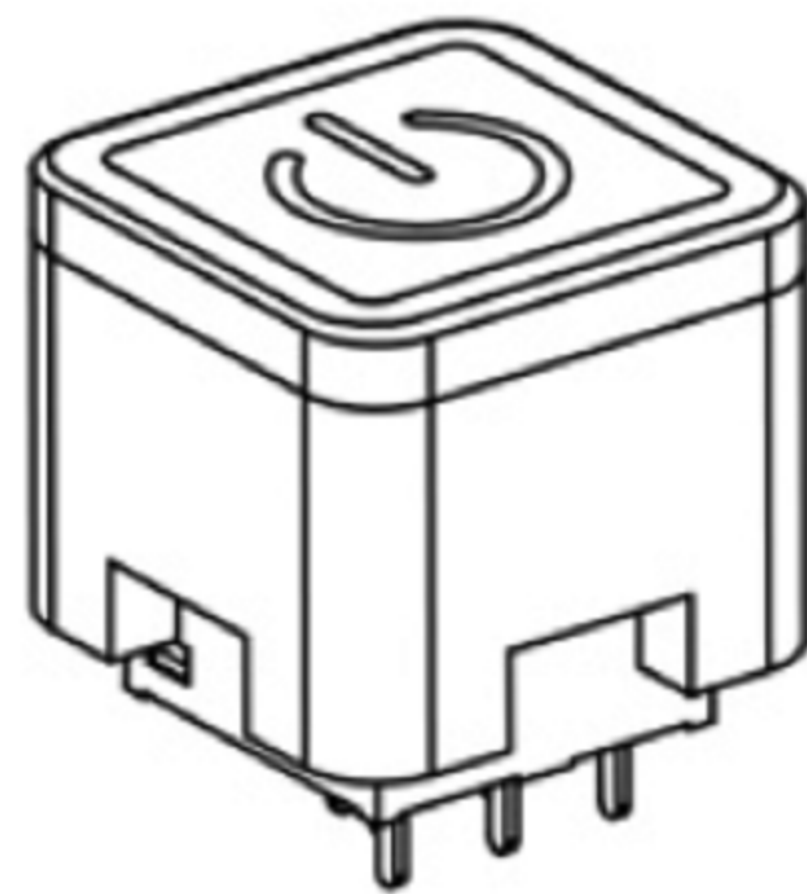
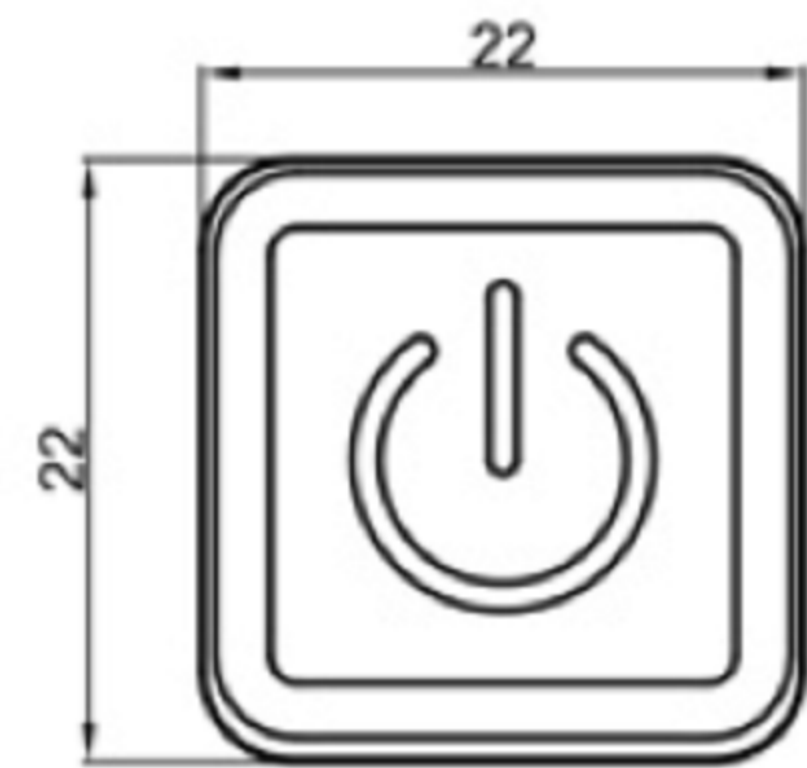


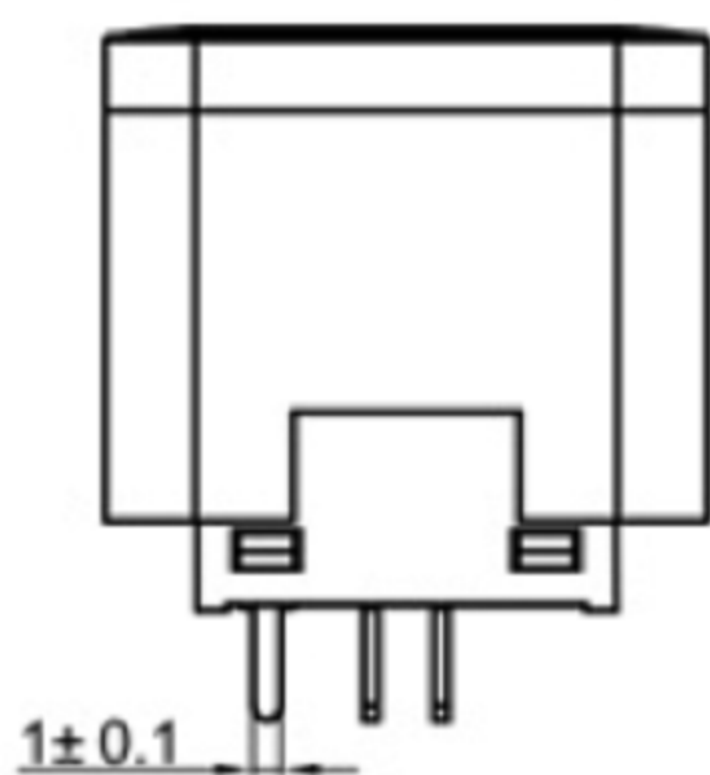

SPECIFICATIONS:

Circuit	:SPDT
Rating	:0.4VA 28VDC
Contact resistance	:100mΩ Max.
Insulation resistance	:DC 500V 100MΩ Min.
Withstand voltage	:AC 500V for 1 minute;
Operating force	:200± 100gf ;
Total travel	:2.2± 0.5mm
Mechanical life	:Over 200,000 cycles;
Electrical life	:Over 100,000 cycles;
Manual welding	:350° C for 3 seconds
Operating temperature	:-25° C ~ +70° C



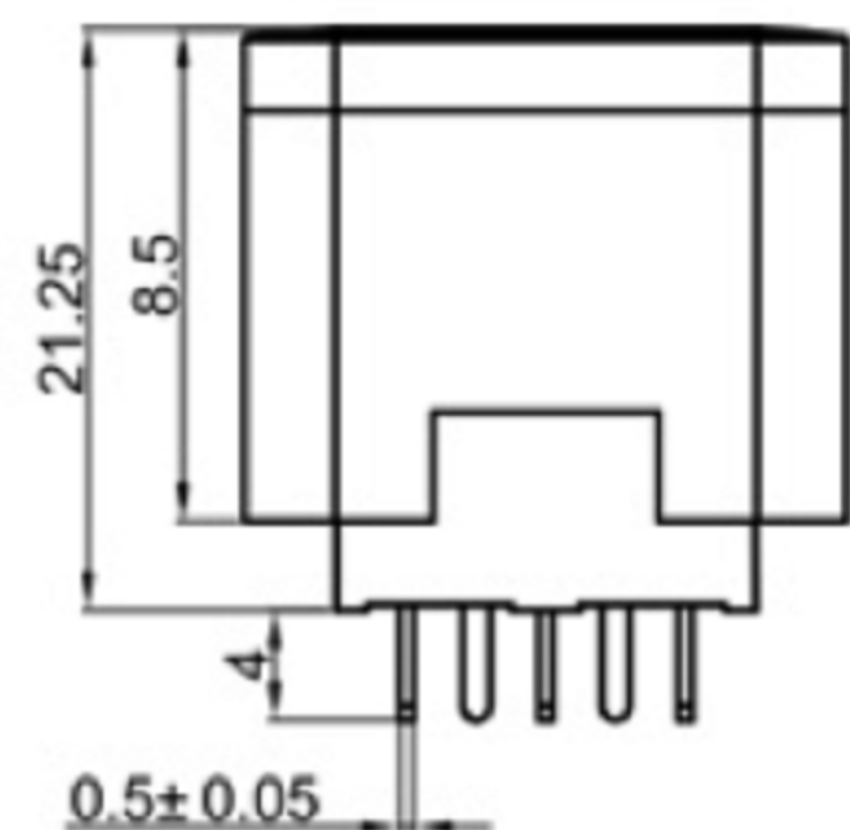


CIRCUIT

MATERIAL:

Base:PA+GF,UL rated:94 V-2 Min.
Cap:PC
Terminal:Brass, Golden plated;

P. C. B. LAYOUT

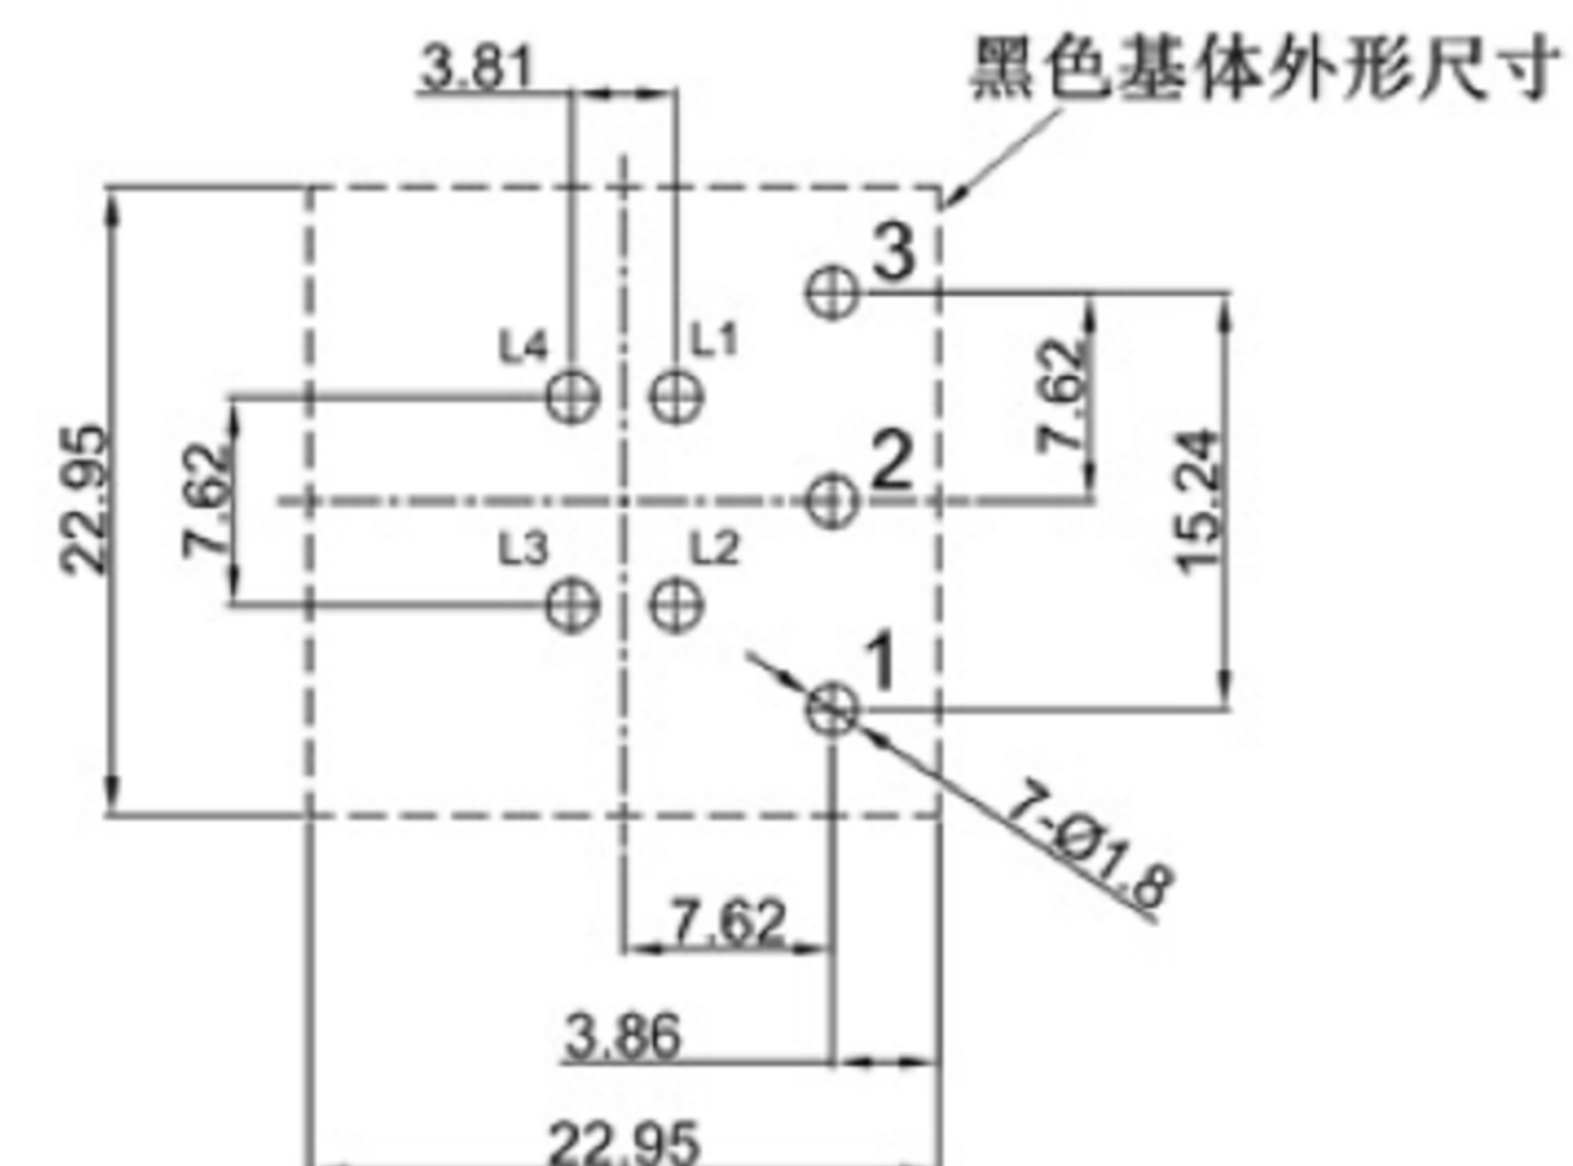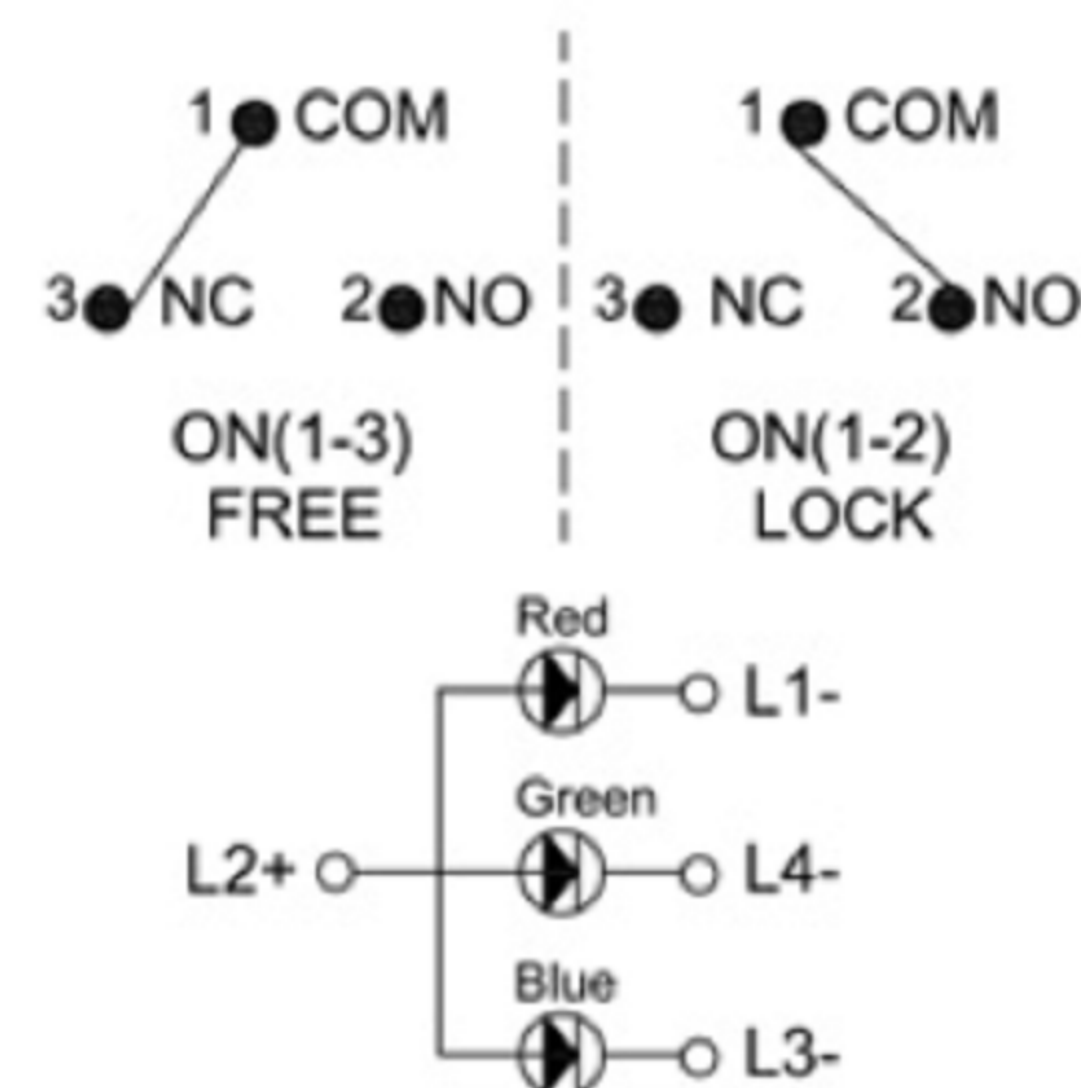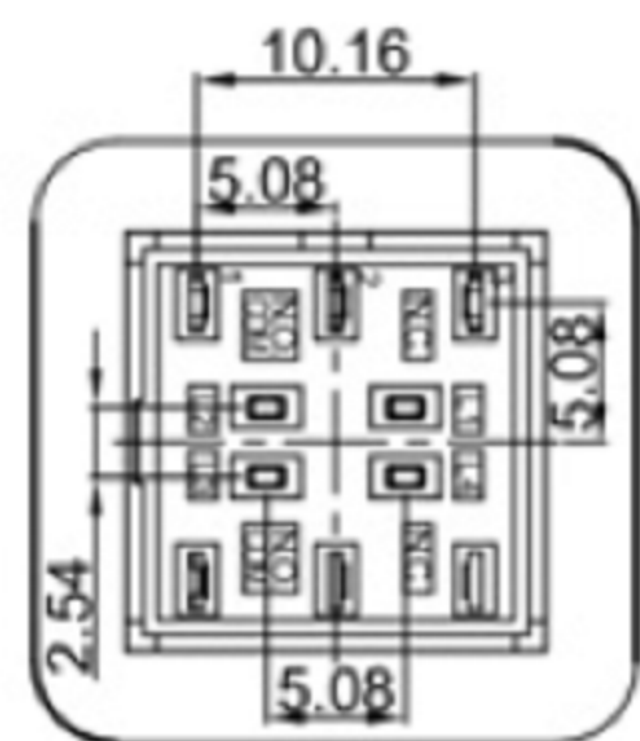

LED SPECIFICATIONS					
RGB	B 蓝色	2.7	3	3.7	20
	G 翠绿色	2.7	3	3.7	20
	R 红色	1.7	2	2.4	20
Clip emitted color (X) 灯的发光颜色 (X)		最小	一般	最大	最大操作电流 (mA)
		顺向电压(V)			



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/27/22			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH WITH LED
Jacky Chen	12/27/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/27/22	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R