

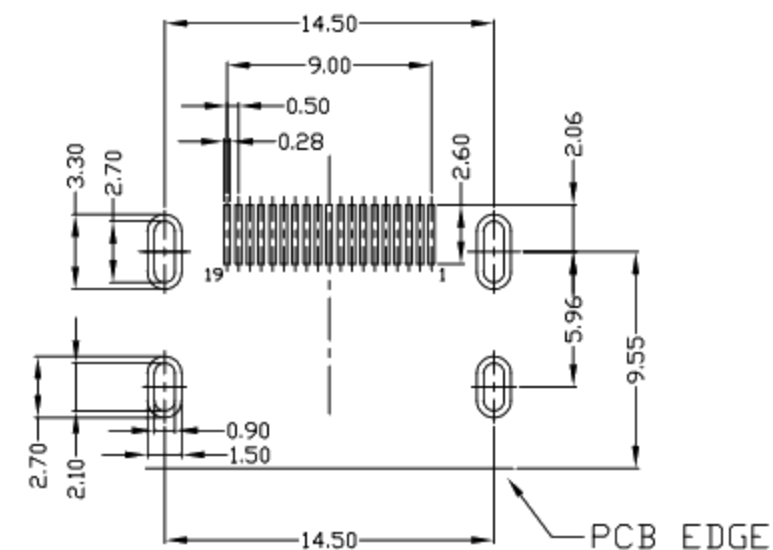
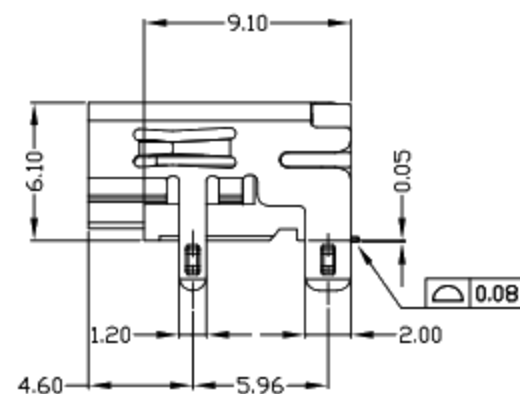
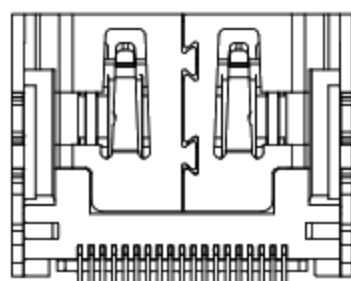


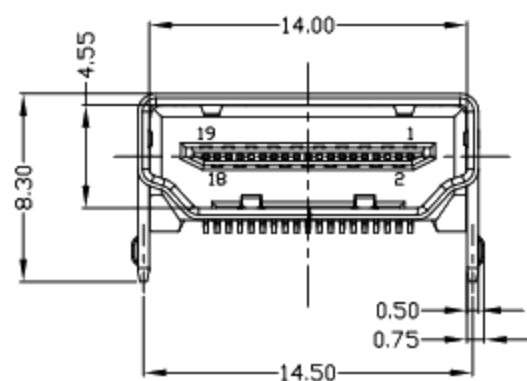

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

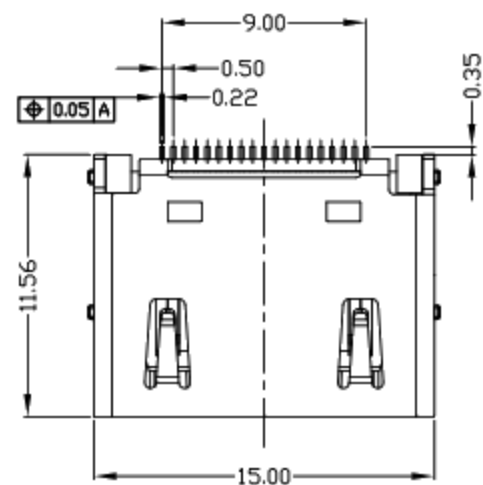

RECOMMENDED PCB LAYOUT (T=1.60mm)

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 0.5AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +105°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

N: Ni
G: Au
1: Au 1U"
5: Au 15U"

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2°	UNITS	mm	廣東科斯達電子科技有限公司			
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X* ±1°	MAT'L	SEE NOTE				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE	TITLE: HDMI AF 19PIN SMT 銅壳鍍銀DIP 脚帶凸点 L=9.10			
1	TERMINAL	COPPER ALLOY	19	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			APPD:	DWG NO.:			
								CHKD:	SCALE			
								APPD:	SHEET			
								APPD:	REV.			
								APPD:	CUSTOMER DRAWING			