


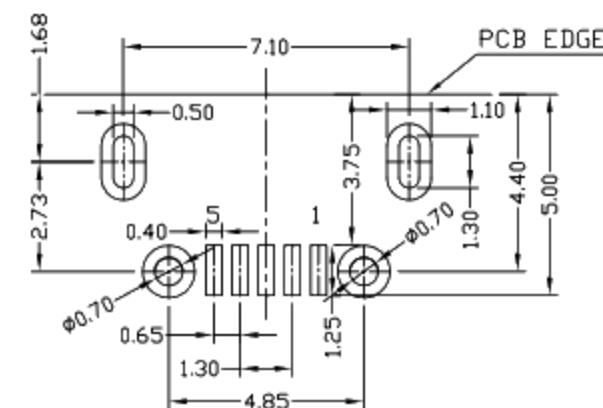
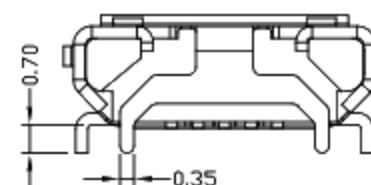



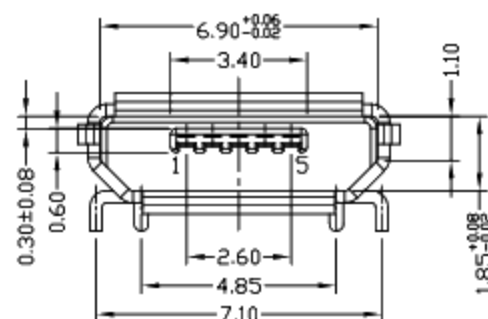

REV.	ECN.	NO.	APPD.

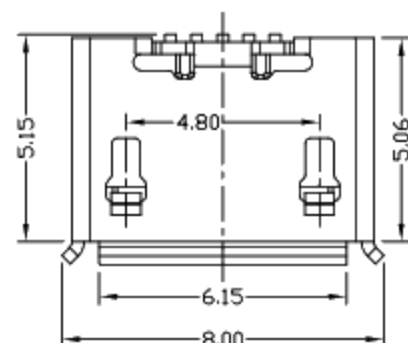

RECOMMENDED PCB LAYOUT

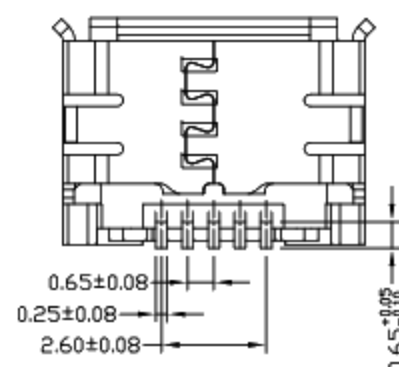

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

1:AU 1U"	W:WHITE
6:AU 30U"	B:BLACK
T:TIN	1:PBT
N:NICKEL	2:PA6T
	3:PA9T
	4:LCP

Bill of materials:

3	SHELL	STAINLESS STEEL / COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.* ±2°	UNITS mm	廣東科斯達電子科技有限公司												
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X* ±1°	MAT'L							SEE NOTE	TITLE: MICRO USB B TYPE F 5P 四腳全插 7.1 4.85	PART NO.:				
					.XX ±0.25	.XX*	FINISH													
					.XXX ±0.15	.XXX*	SEE NOTE													
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		Q'TY	DR: Ricky 2019/03/27	DWG NO.:											
NO	PARTS	MATERIAL	QTY	FINISHING		CHKD: Ricky 2019/03/27	APPD:													
						SCALE	SHEET	REV.	CUSTOMER											
									5:1	1/1	A	DRAWING								