

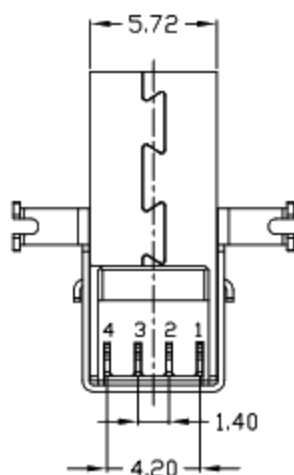
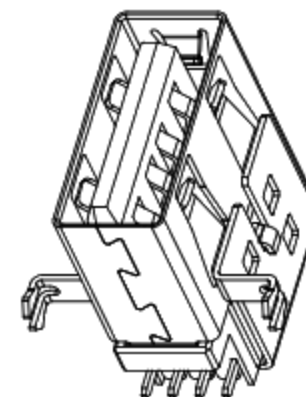
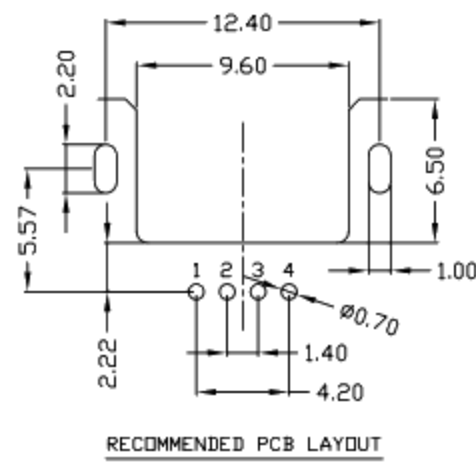


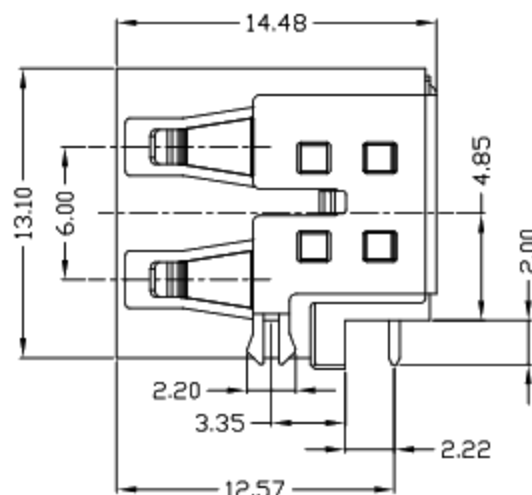

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

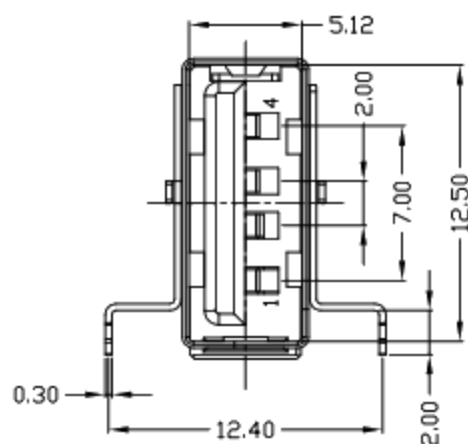

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	廣東科斯達電子科技有限公司			
4	BACK COVER	SPCC	1	PLATED NICKEL	X. ±0.35	X. ±2°	SEE NOTE	TITLE:		
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X° ±1°		PART NO.:		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX°		DR: gan 2014/07/08		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX°		DWG NO.:		
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: gan 2014/07/08	SCALE	SHEET
								APPD:	1:1	1/1
									REV. B	CUSTOMER DRAWING