

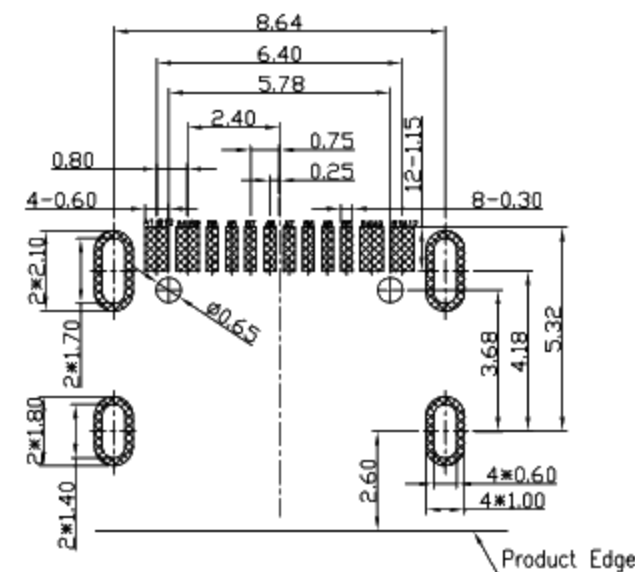
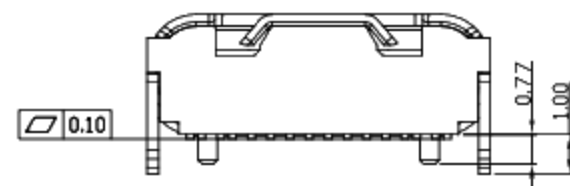
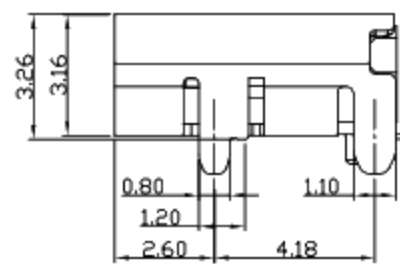
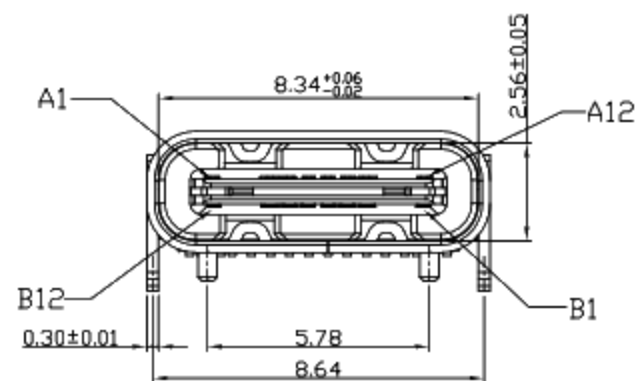



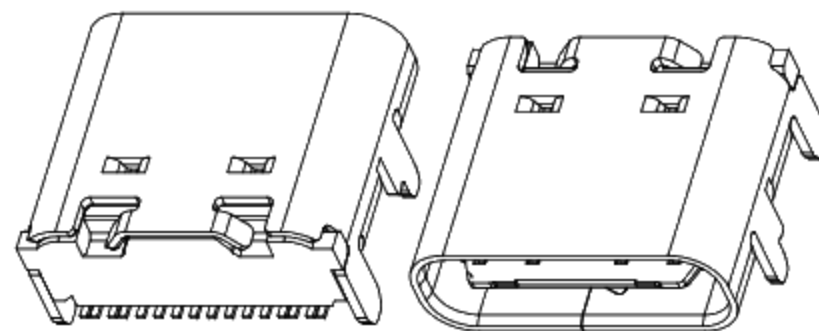


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

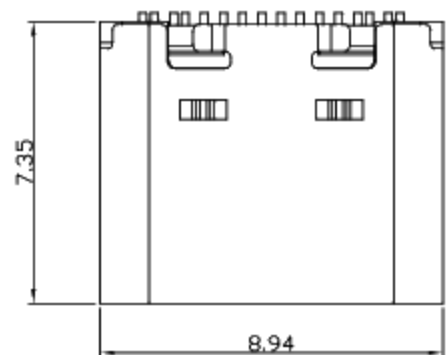

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

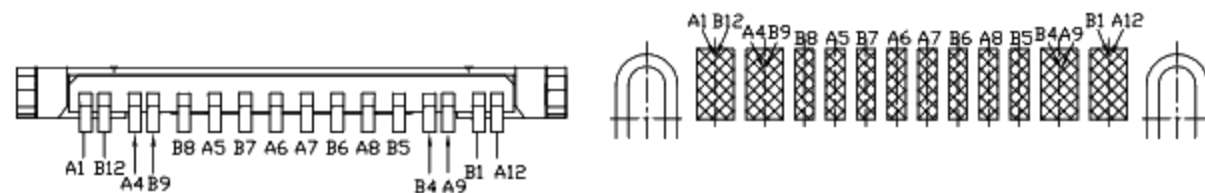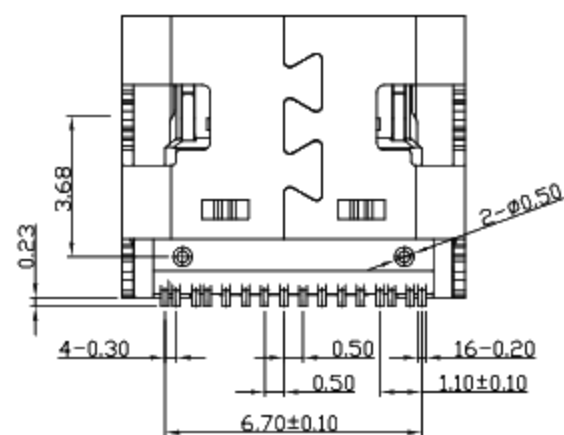

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3AMP MAX;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
MEASURED BY 500 VDC.
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

1-Au 1U"	1-PBT
2-Au 3U"	2-PA6T
3-Au 15u"	3-PA9T
4-Au 30U"	4-LCP

5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.50	X.' ±2'	UNITS mm	廣東科斯達電子科技有限公司 TITLE: USB TYPE CF 單排插板16PIN L=7.35 四腳插板有柱 PART NO.: DWG NO.: SCALE SHEET REV. CUSTOMER DRAWING 1:1 1/1 B			
4	SHIELDING PLATE	STAINLESS STEEL	1		.X ±0.20	.X' ±1'	MAT'L				
3	MD	LCP+30%GF	1	UL94V-0	.XX ±0.10		SEE NOTE				
2	CONTACT	COPPER ALLOY	16	PLATED GOLD/NICKEL			FINISH				
1	HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE				
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: Ricky 2019/08/22	APPD:	