

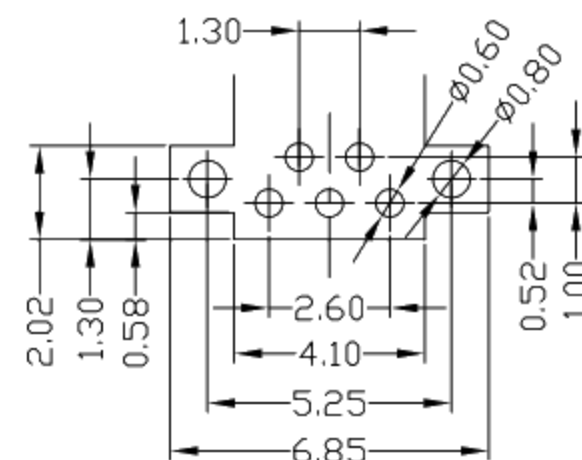
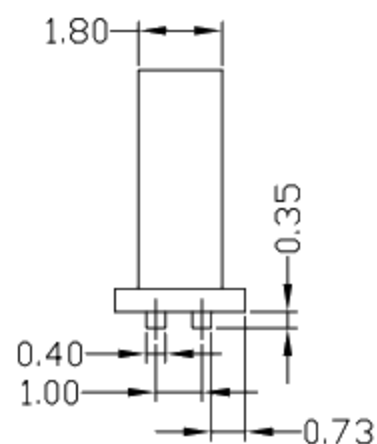


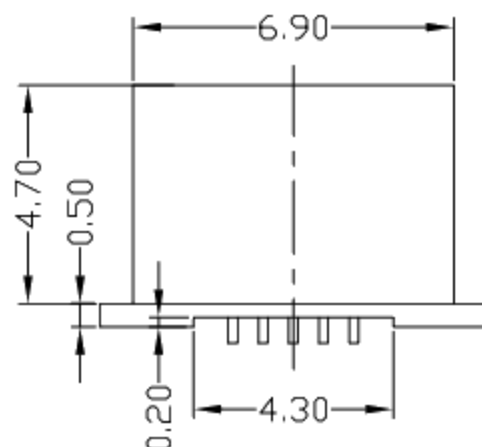


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

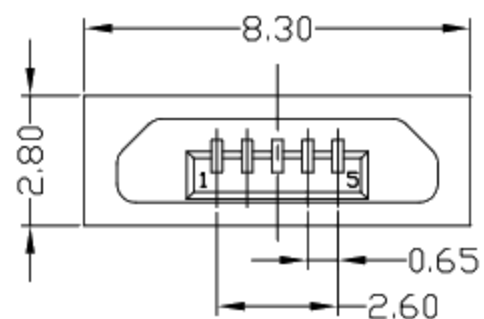

RECOMMENDED PCB LAYOUT

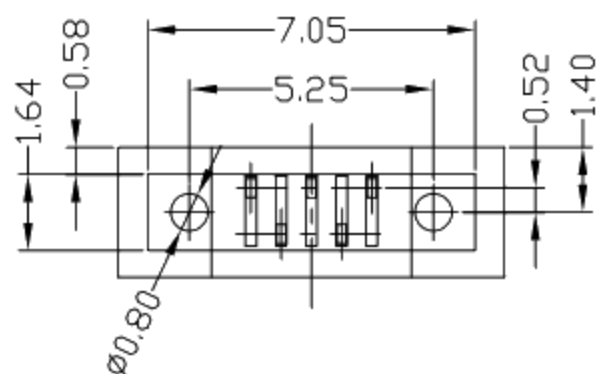

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 1.5AMP, 250V AC;
- INSULATION RESISTANCE: 1000MΩ MIN;
- CONTACT RESISTANCE: 30mΩ MAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -20°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1Au 1U*
6Au 30U*

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP
5: PA46

Bill of materials:

					X. ±0.3	X.* ±2*	UNITS	廣東科斯達電子科技有限公司									
					.X ±0.2	.X* ±1*	mm										
					.XX ±0.15	.XX*	MAT'L	TITLE: Miro 5P 无线充头		PART NO.:							
					.XXX ±0.10	.XXX*	SEE NOTE										
2	HOUSING	PBT+30%GF	1	UL94V-0			FINISH	DR: gan 2014/04/23		DWG NO.:							
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE										
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: gan 2014/04/23		SCALE		SHEET		REV. B		CUSTOMER DRAWING	
									APPD:								