

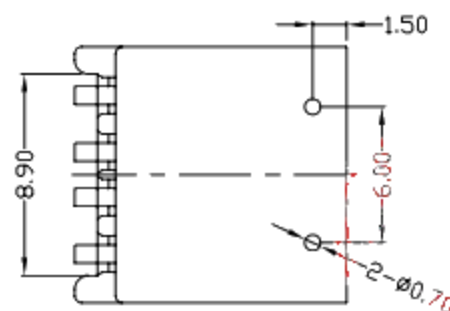
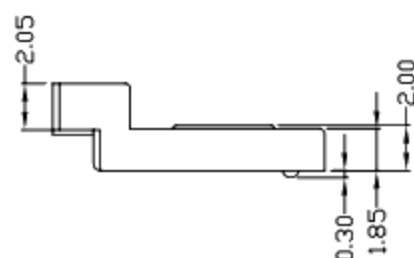



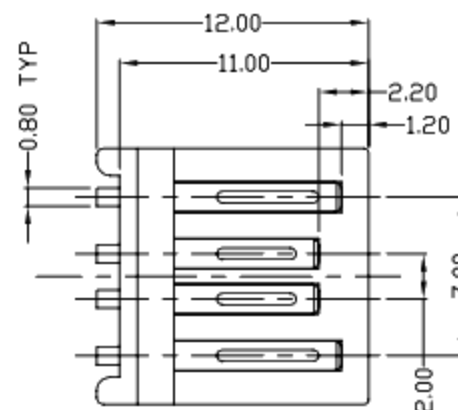

RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1AU 10"
5AU 15U"
6AU 30U"

WHITE
BLACK

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

					X. ±0.35	X.* ±2*	UNITS mm	廣東科斯達電子科技有限公司						
					.X ±0.3	.X* ±1*	MAT'L							
					.XX ±0.25	.XX*	SEE NOTE							
					.XXX ±0.15	.XXX*	FINISH							
2	HOUSING	LCP/PA6T+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			SEE NOTE	TITLE: USB AM 180° 贴片式短体(12.0)		PART NO.:			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN				Q'TY	DR: gan 2015/11/11		DWG NO.:			
									CHKD: gan 2015/11/11					
NO	PARTS	MATERIAL	QTY	FINISHING						APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
1		2		3		4		5		6		7		