








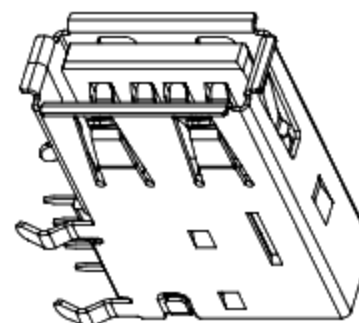


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

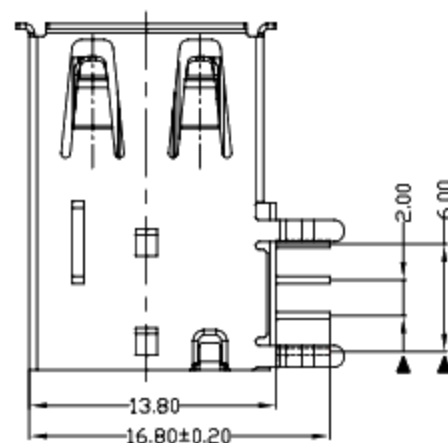

RECOMMENDED PCB LAYOUT

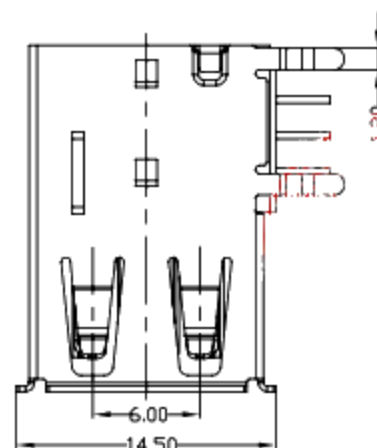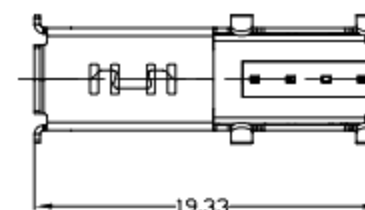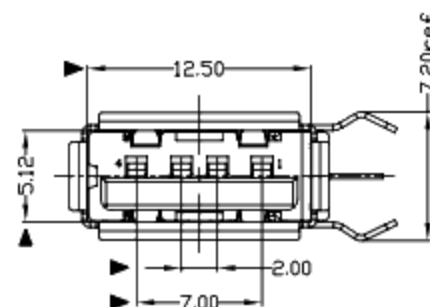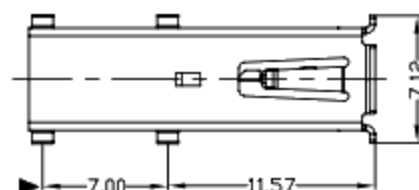

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

1Au 1U"
6Au 30U"

W: WHITE
B: BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

5	BACK COVER	SPCC	1	PLATED NICKEL	X. ±0.35	X.* ±2*	UNITS	mm	廣東科斯達電子科技有限公司						
4	BOTTOM COVER	PBT	1	UL94V-0	.X ±0.30	.X* ±1*	MAT'L								
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX*	SEE NOTE		TITLE: LSB A/F 90° DIP侧插长体		PART NO.:				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH								
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE		DR: gan 2012/6/29		DWG NO.:				
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY		CHKD: gan 2012/6/29						
									SCALE		SHEET	REV.	CUSTOMER		
									1:1		1/1	B	DRAWING		
									APPD:						