

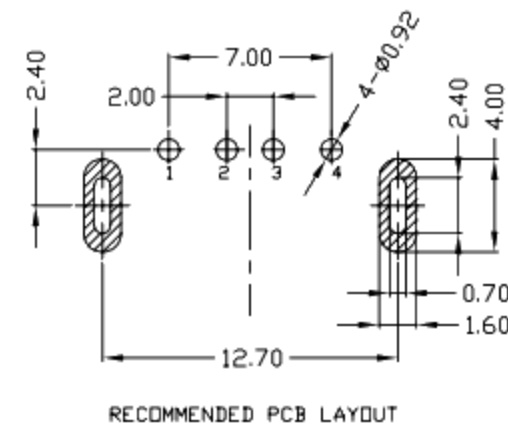


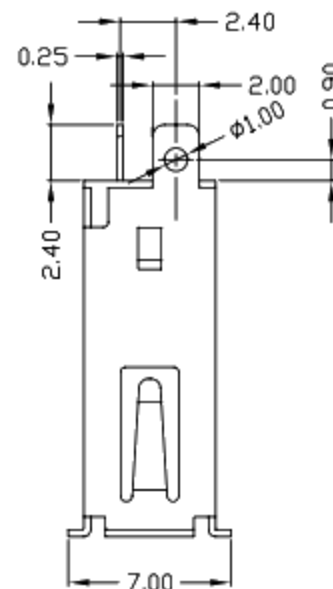


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

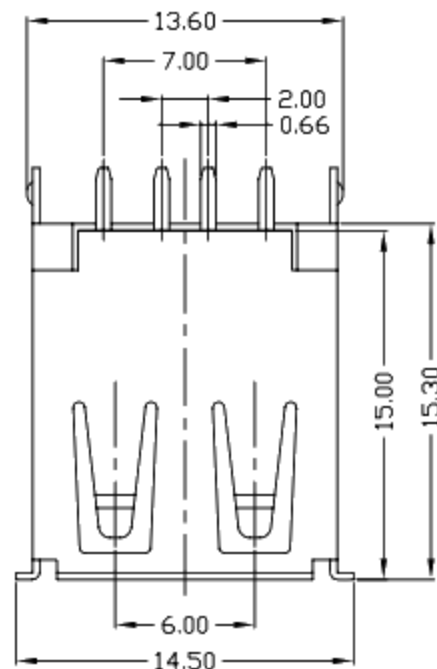

RECOMMENDED PCB LAYOUT

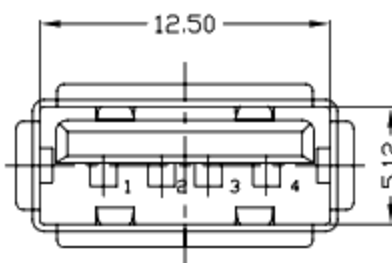

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

14u 1U'	W: WHITE
6Au 30U'	B: BLACK
	1: PBT
	2: PA6T
	3: PA9T
	4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X.* $\pm 2^*$	UNITS	mm	廣東科斯達電子科技有限公司			
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X* $\pm 1^*$	MAT'L		TITLE: USB AF 180" 插板长体(直脚)			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*	SEE NOTE					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH		DR: gon 2014/09/26			
							SEE NOTE					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: gon 2014/09/26			
									APPD:			
									SCALE: 1:1			
									SHEET: 1/1			
									REV: B			
									CUSTOMER DRAWING			