

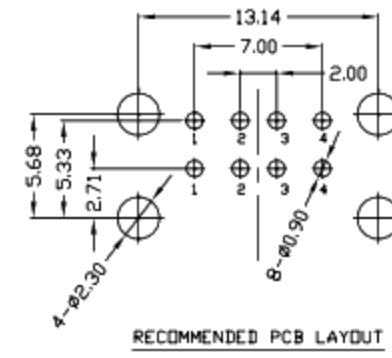
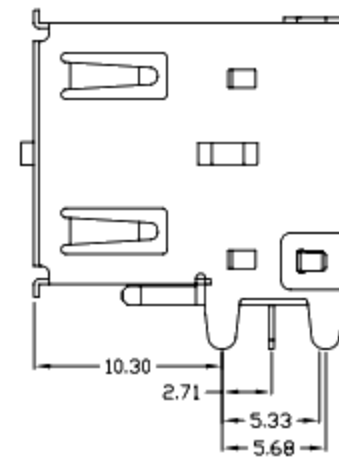
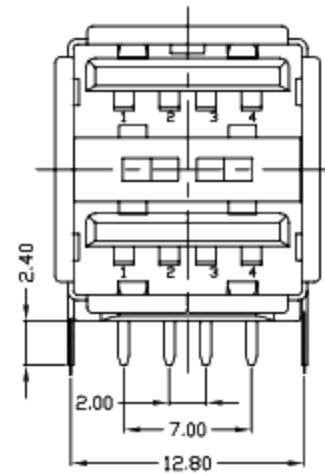


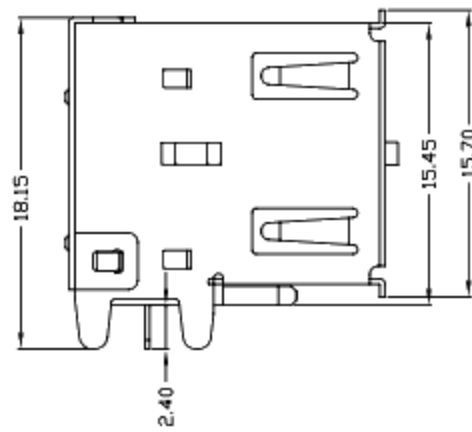

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

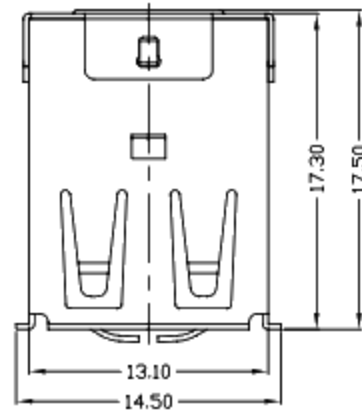

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.


4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.* ±2'
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X.* ±1'
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX.*
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE DNNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE DNNOTECH INC.



廣東科斯達電子科技有限公司

TITLE: USB AF 90° 双层半包(直脚2.4)双弹	PART NO.:			
DR: gon 2014/09/16	DWG NO.:			
CHKD: gon 2014/09/16	SCALE	SHEET	REV.	CUSTOMER DRAWING
APPD:	1:1	1/1	B	