


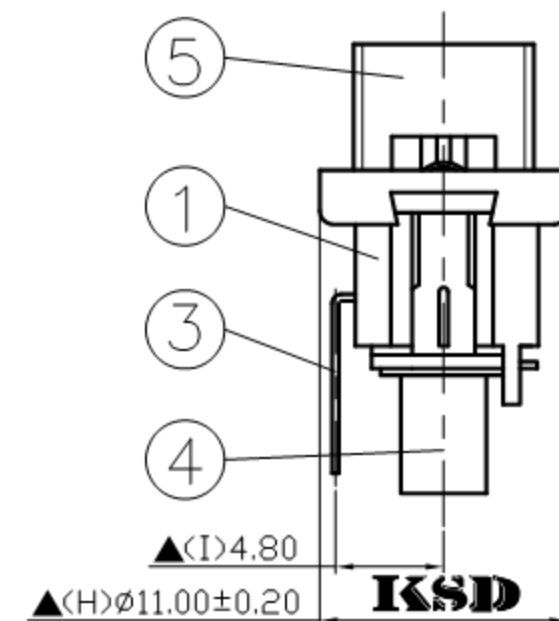
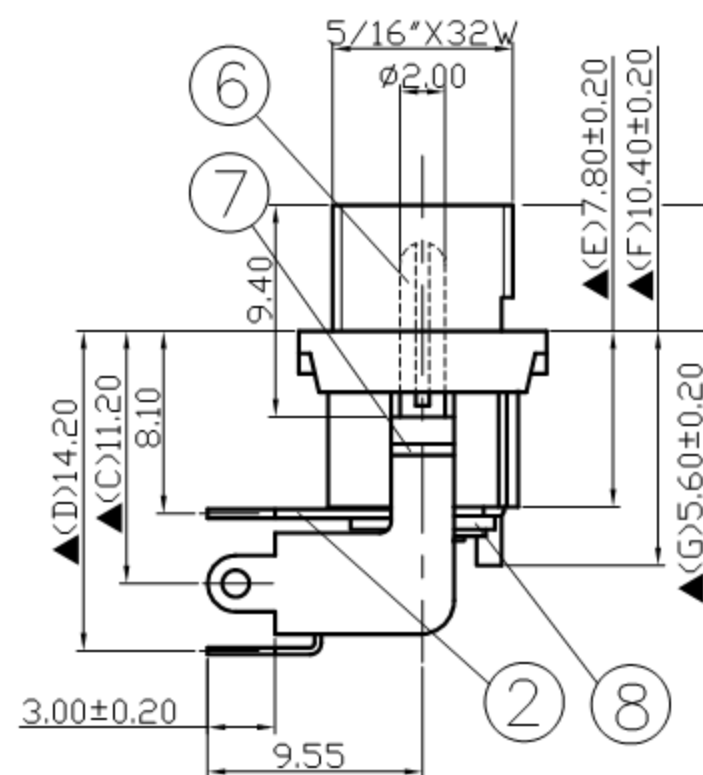
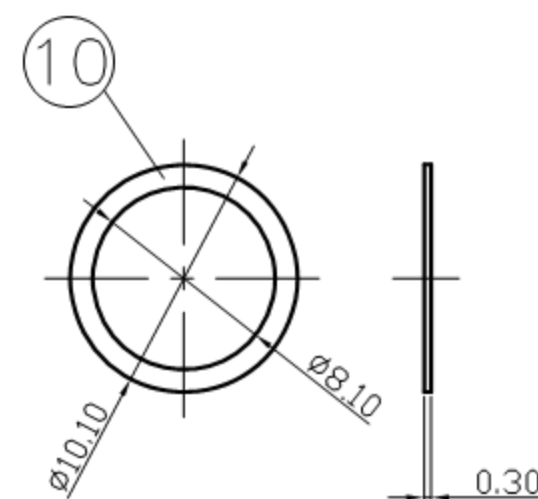


SCHEMATIC	
MODEL NO	C

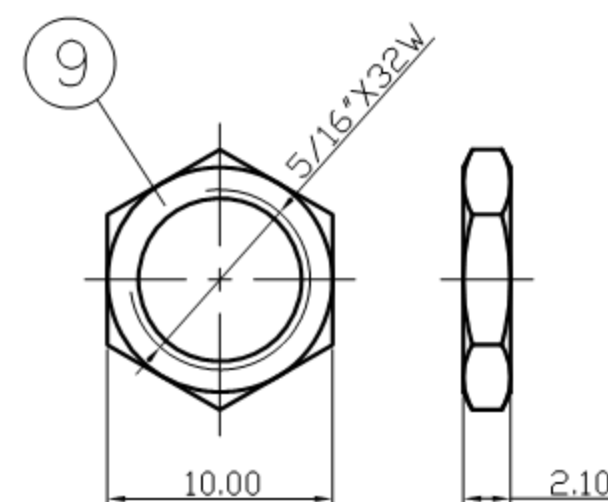

10.	Washer	0.3T Steel	1	Nickel Plated
9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Insulator B	Red Vulcanited Fibre	1	Red Color
7.	Insulator A	Red Vulcanited Fibre	1	Red Color
6.	Pin(2.0 ϕ)	Low Lead Brass Rod	1	Nickel Plated
5.	Bushing	Low Lead Brass Rod	1	Nickel Plated
4.	Pin Terminal	0.3T Brass	1	Silver Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish

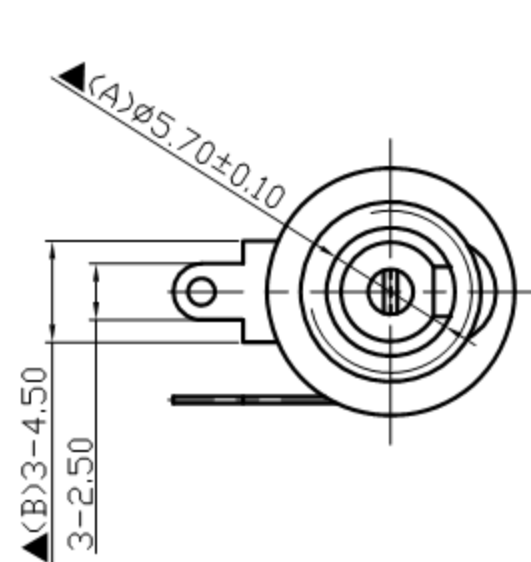

NUT

WASHER

For Redference
僅供參考

RoHS&SVHC
Compliant

 广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.22.2021	王平華			

PART NAME :DC POWER JACK

PART NUMBER:SCD556CCS113B00L

VERSION:3.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension