


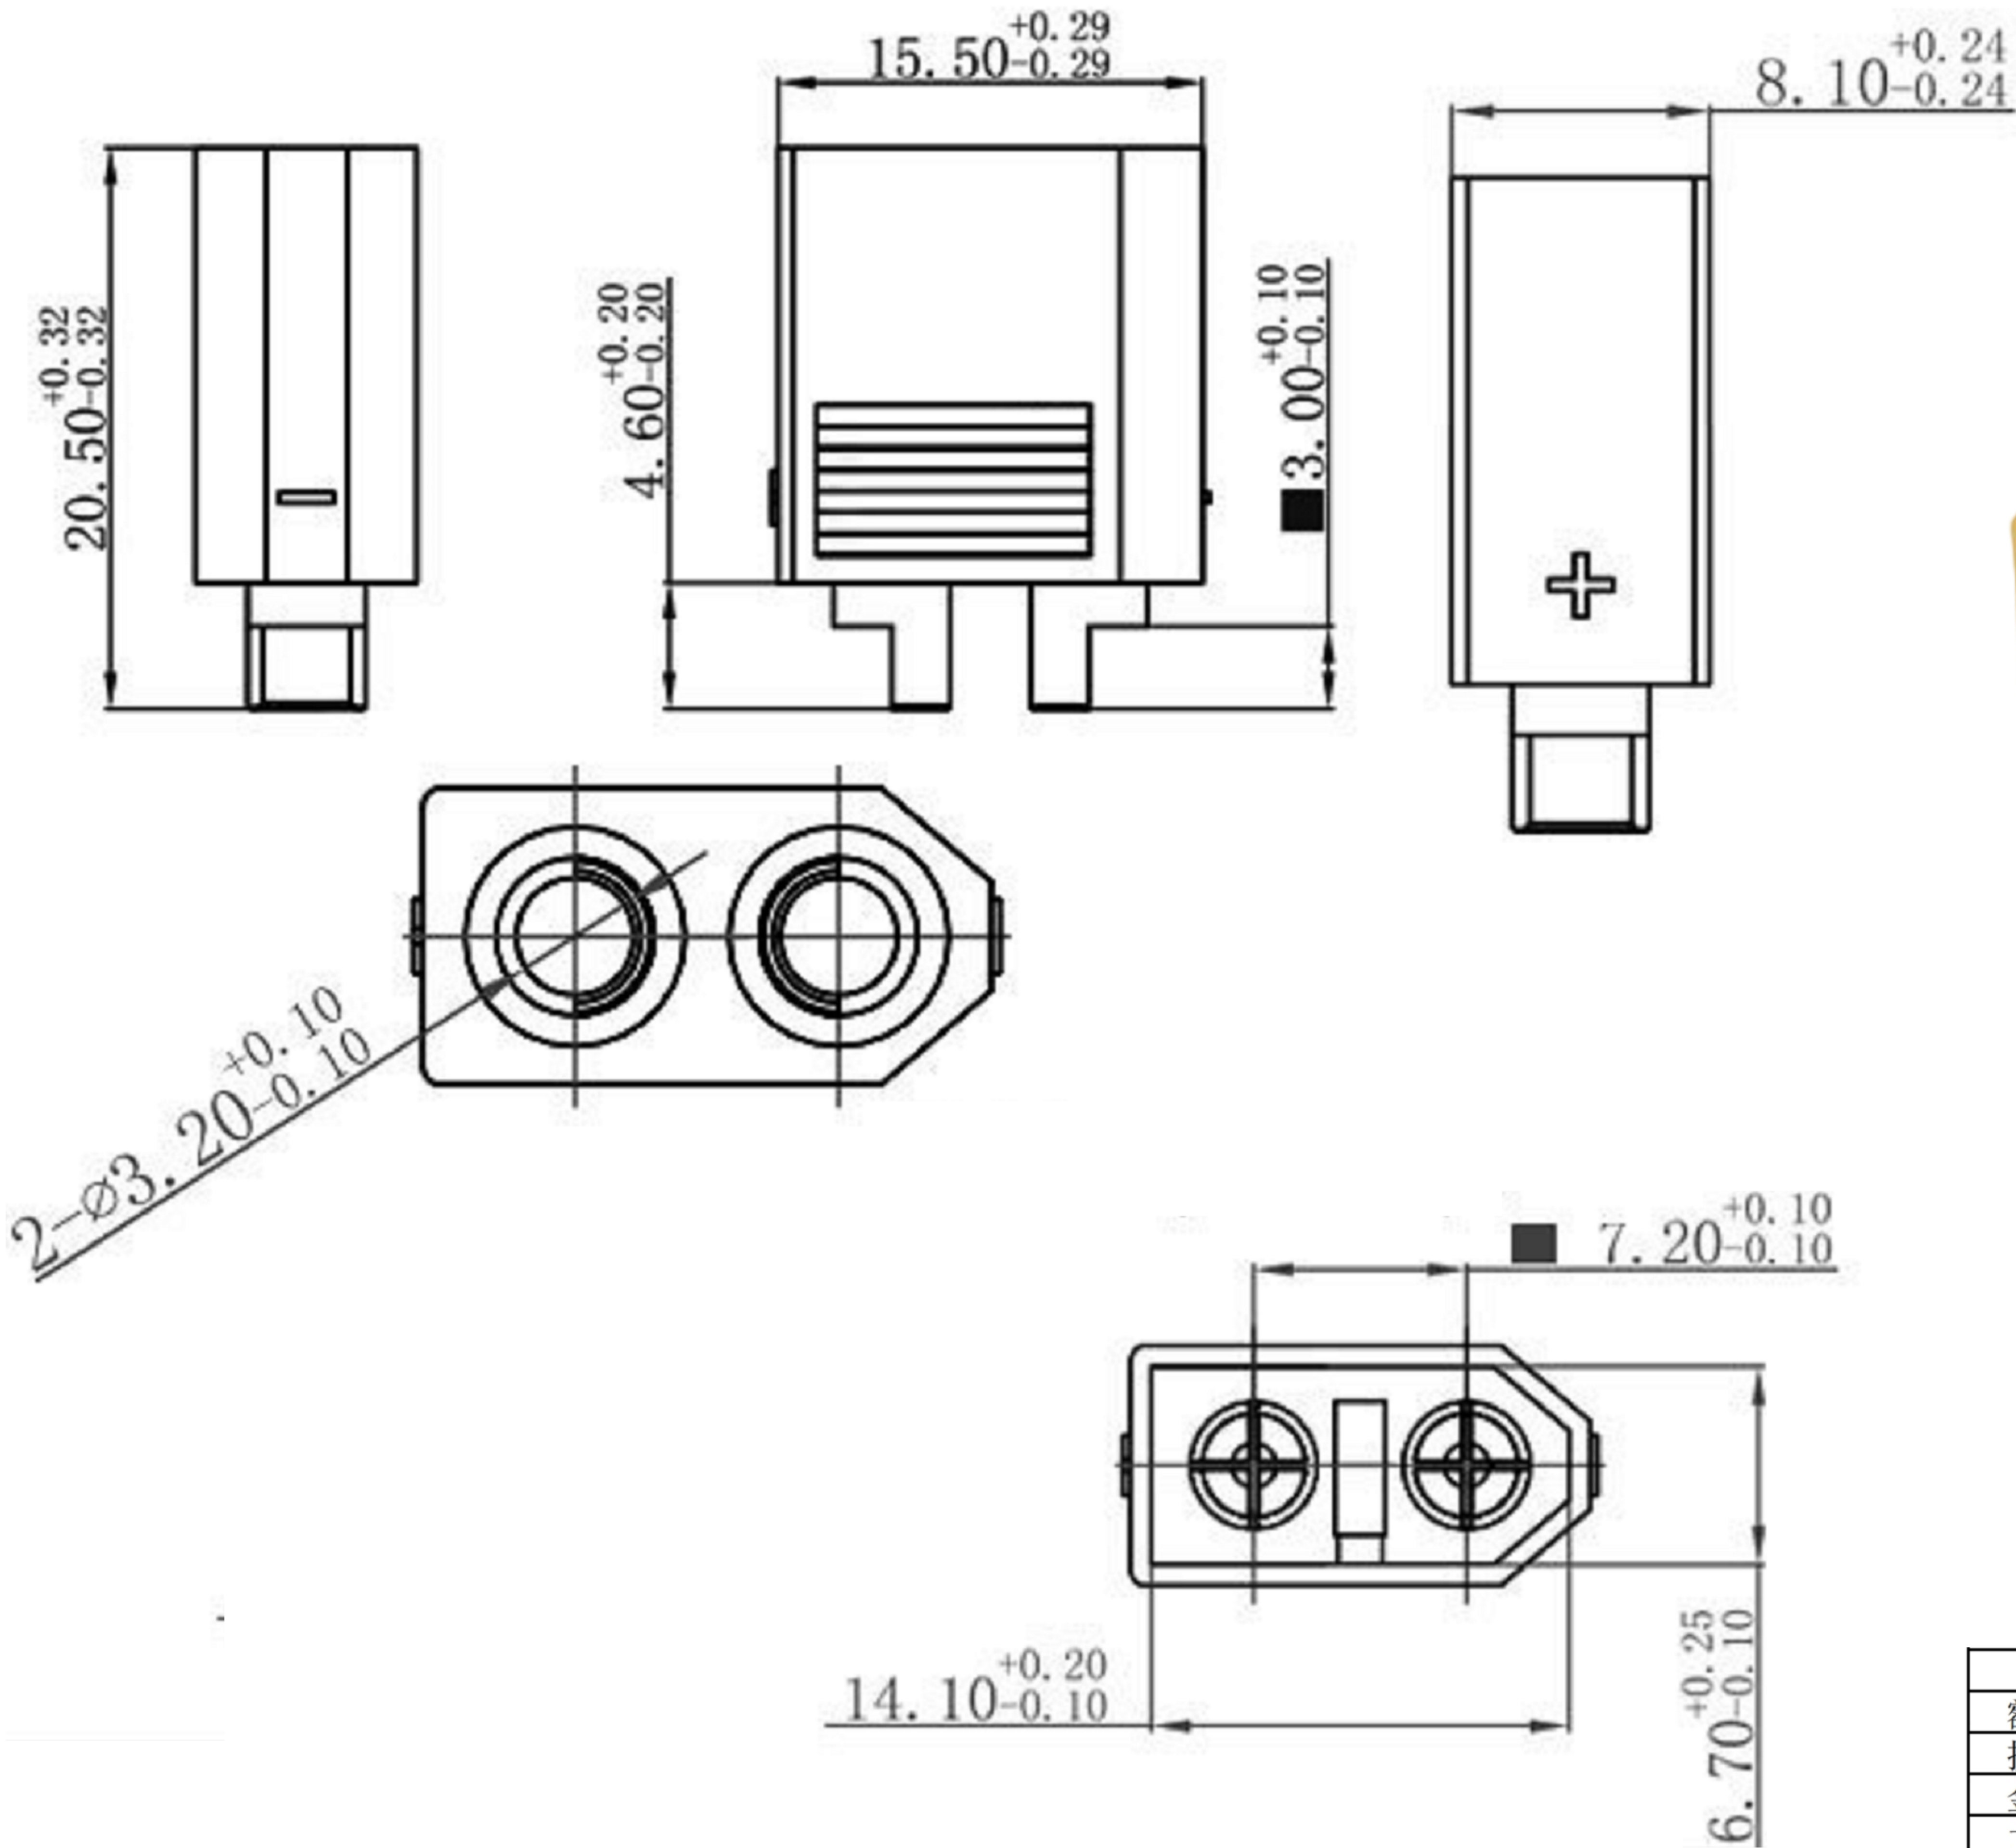


产品型号		GDTX60U-M/-F (UL认证)	
额定电流	30A	瞬间电流	60A
接触电阻	0.45mΩ	额定电压	DC500V
金属材质	铜镀金	绝缘材质	PA
工作温度	-20℃ to 120℃	阻燃等级	UL94 V0
推荐线规	12AWG	推荐使用次数	100times

 **广东科斯达电子科技有限公司**
KSDKG Guang dong Keside Electronic Technology Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S  UNITS MM

DRAWN BY:	DATE	MAT'L		TITLE	JACK
Ming Ming Zou	6/8/23				
CHECKED BY:	DATE	FINISH		MODLE	TX connector
Ning Ning Su	6/8/23				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	TX60 series
Jia Xiang	6/8/23	SHEET NO.	1 of 1	PART NO.	XT-60G-A

SIZE	A4
VER	R4