
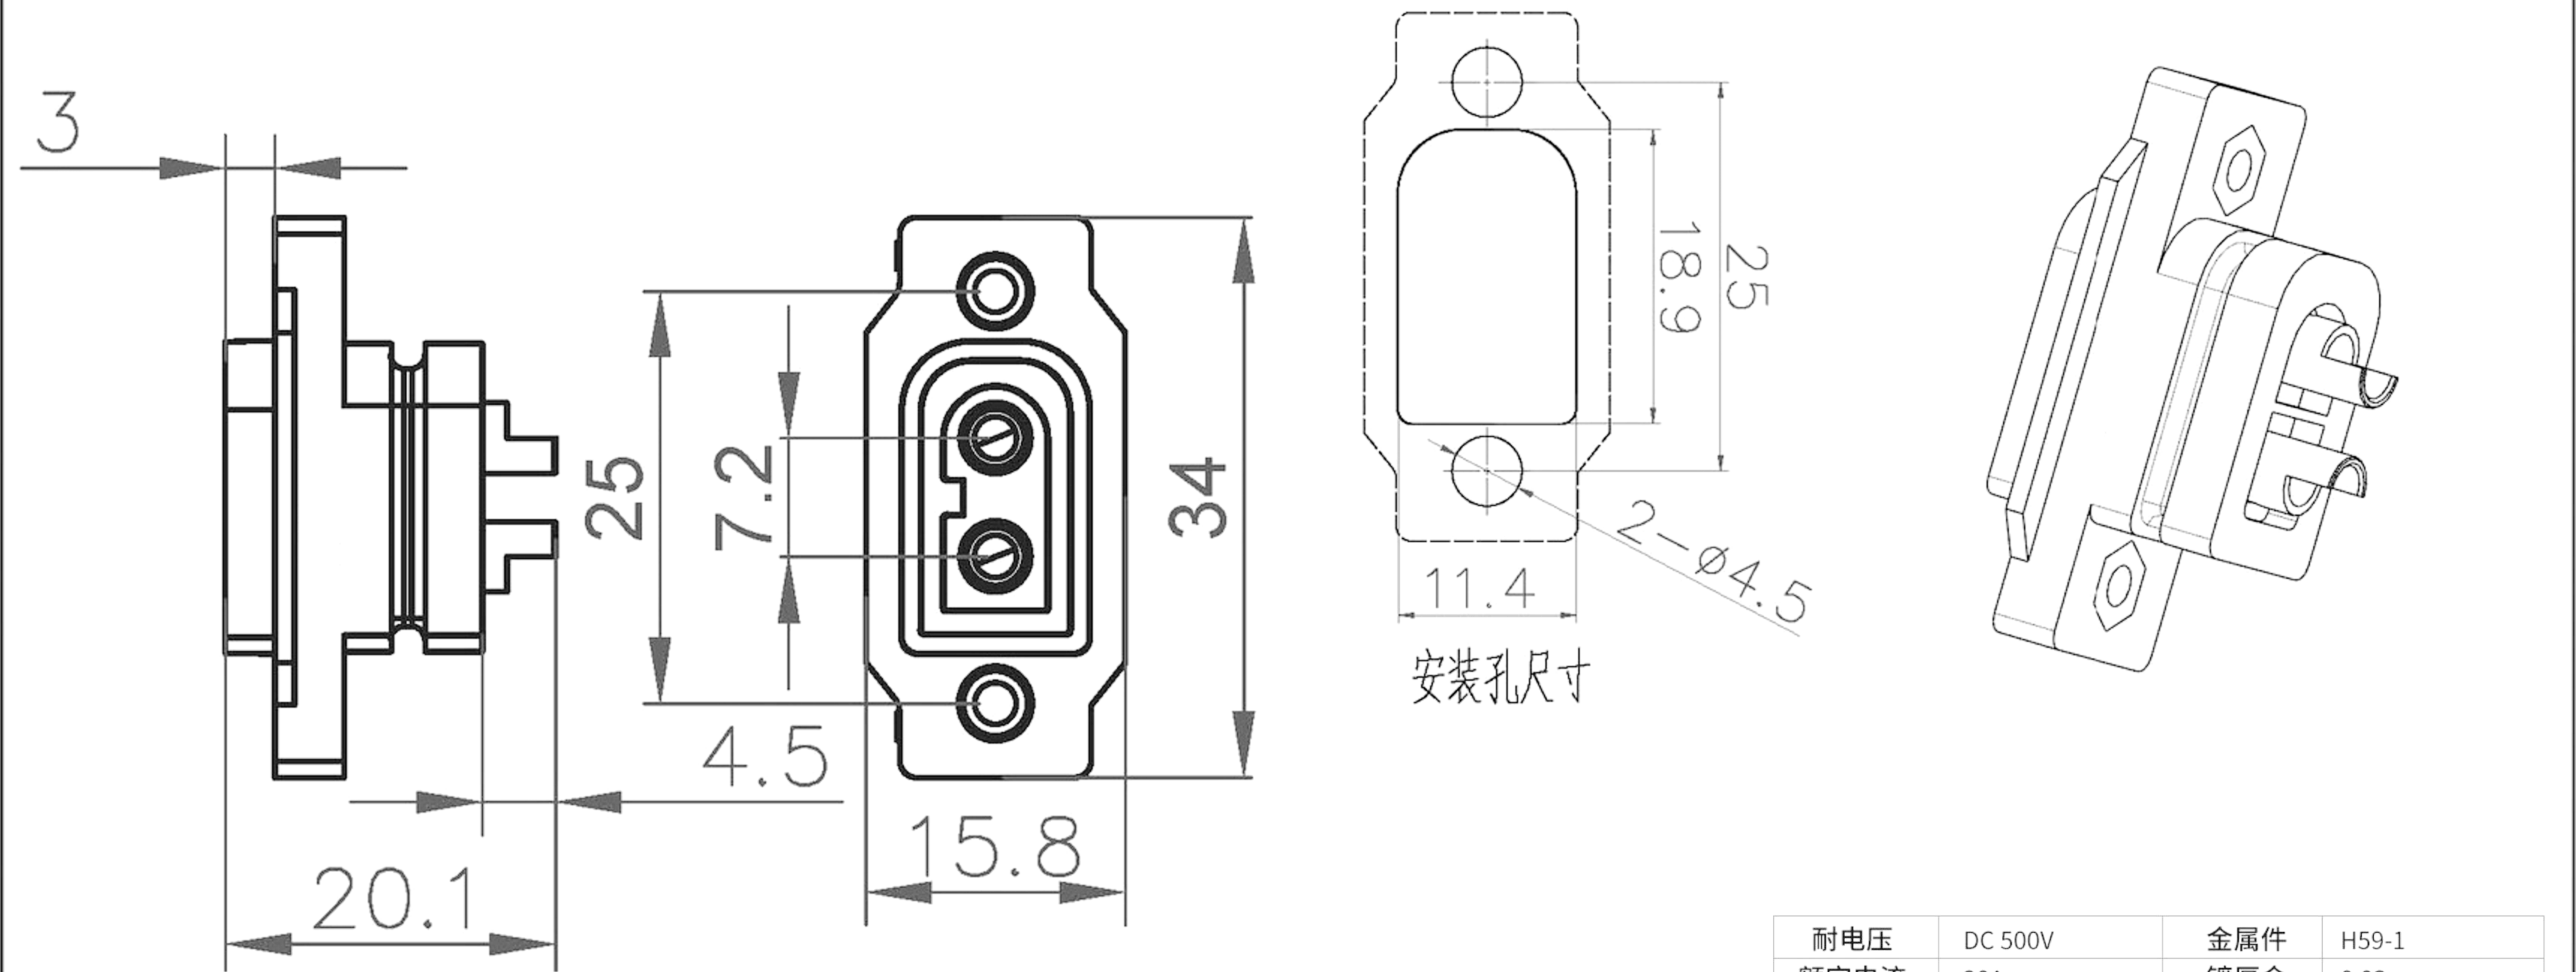


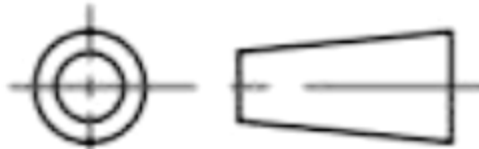

耐电压	DC 500V	金属件	H59-1
额定电流	20A	镀厚金	0.03 μ m
接触电阻	0.60m Ω	外壳	PA66阻燃材质
绝缘电阻	2000M Ω	插入力	1.8kg-4.5kg
瞬时电流	40A	拔出力	1.8kg-4.5kg
温升	20A 4h <60 $^{\circ}$ C	阻燃等级	UL94-V0
爬电距离	2.9mm	防护等级	IP40
使用温度	-20 $^{\circ}$ C~120 $^{\circ}$ C	盐雾	48h

TITLE	ZS-TX connector			DRAWN	Juan. Li		TOLERANCE OTHERWISE UNLESS SPECIFIED		9				
PART NO.	ZS-TX-60E-M			CHECKED	Han. Jiang		UP TO 5	±0.2	8				
DRAW NO.				APPROVED	Ping. Wei. Dong		ABOVE 5 ~ 30	±0.3	7				
SCALE	3:1	UNIT	mm	DATE	02-11-2004	ABOVE 30 ~ 50	±0.4	6					
						ABOVE 50	±0.5	5	FRAME	SPCC	1	Ni PLATED	
						ANGLE	±3°	4	TERMINAL	BRASS STRIP	8	Ag PLATED	
								3	BASE	PHENOLIC RESIN	1	NATURAL	
广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.									2	CONTACT PLATE	PBS	2	Ag PLATED
									1	KNOB	POM	1	BLACK
									NO.	PARTS	MATERIAL	QTY.	FINISHING