


后盖

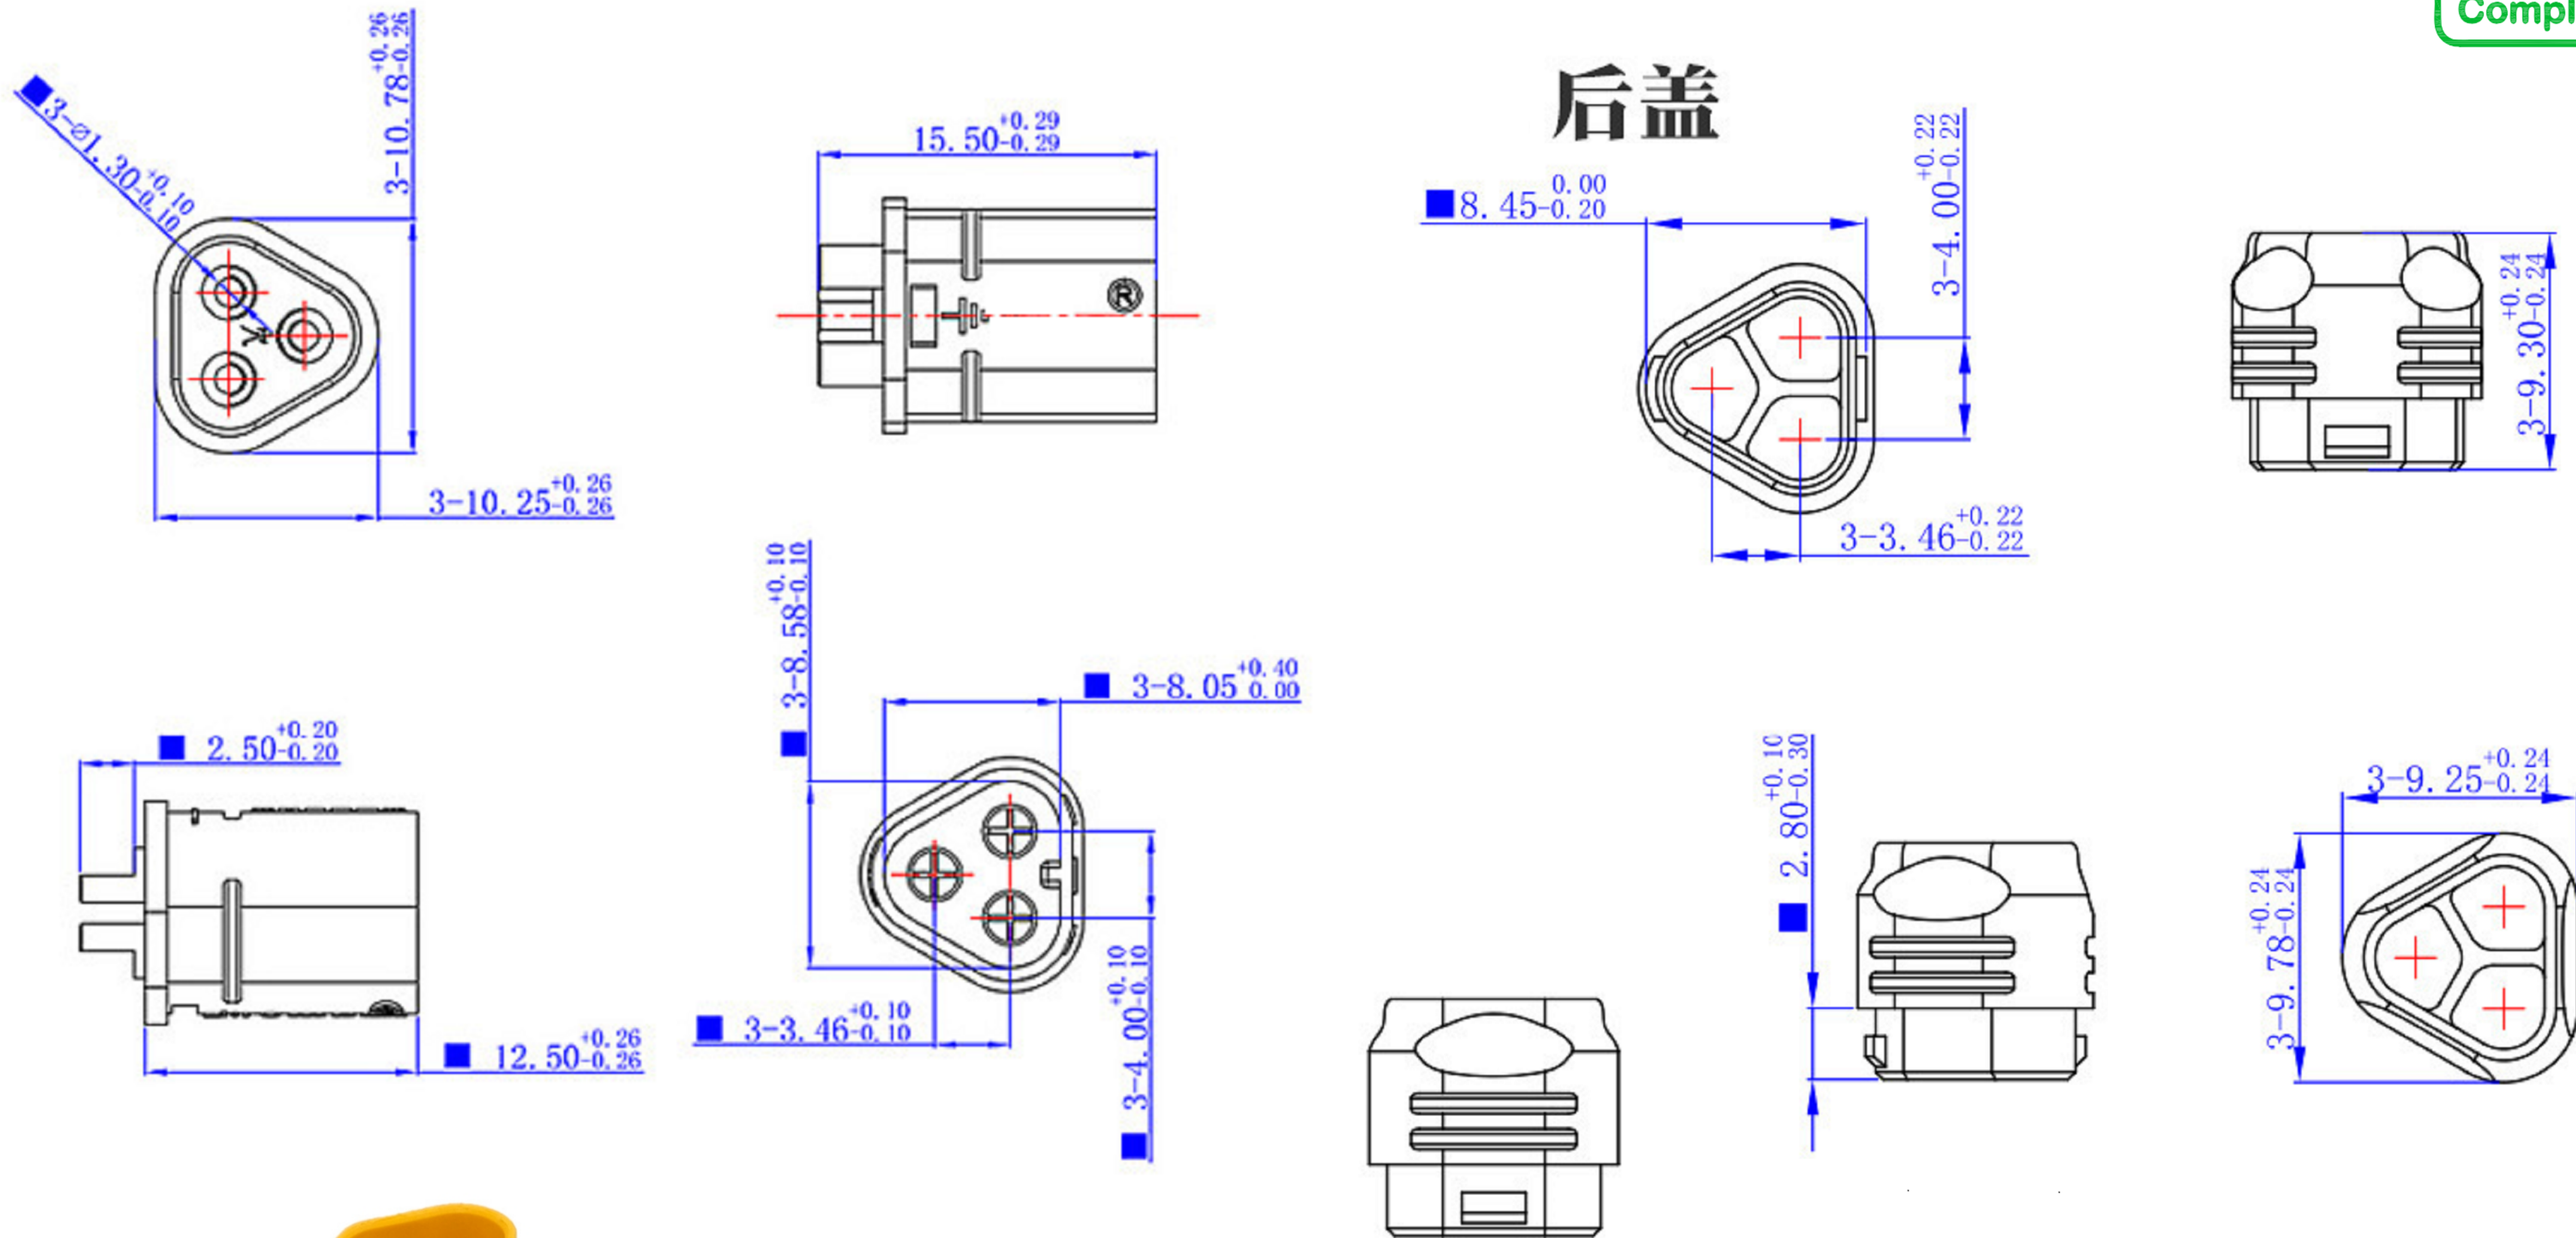

产品型号		GD-TX30U-M/-F (UL认证)	
额定电流	15A	瞬间电流	30A
接触电阻	1.0mΩ	额定电压	DC500V
金属材质	铜镀金	绝缘材质	PA
工作温度	-20°C to 120°C	阻燃等级	UL94 V0
推荐线规	18AWG	推荐使用次数	100tims

 **广东科斯达电子科技有限公司**
KSDKG Guang dong Keside Electronic Technology Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Ming Ming Zou	6/8/23			
CHECKED BY:	DATE	FINISH	MODLE	TX connector
Ning Ning Su	6/8/23			
APPROVED BY:	DATE	SCALE	DWG NO.	TX30 series
Jia Xiang	6/8/23	1 : 1		
		SHEET NO.	PART NO.	TX-N30-G
				SIZE A4
				VER R4