

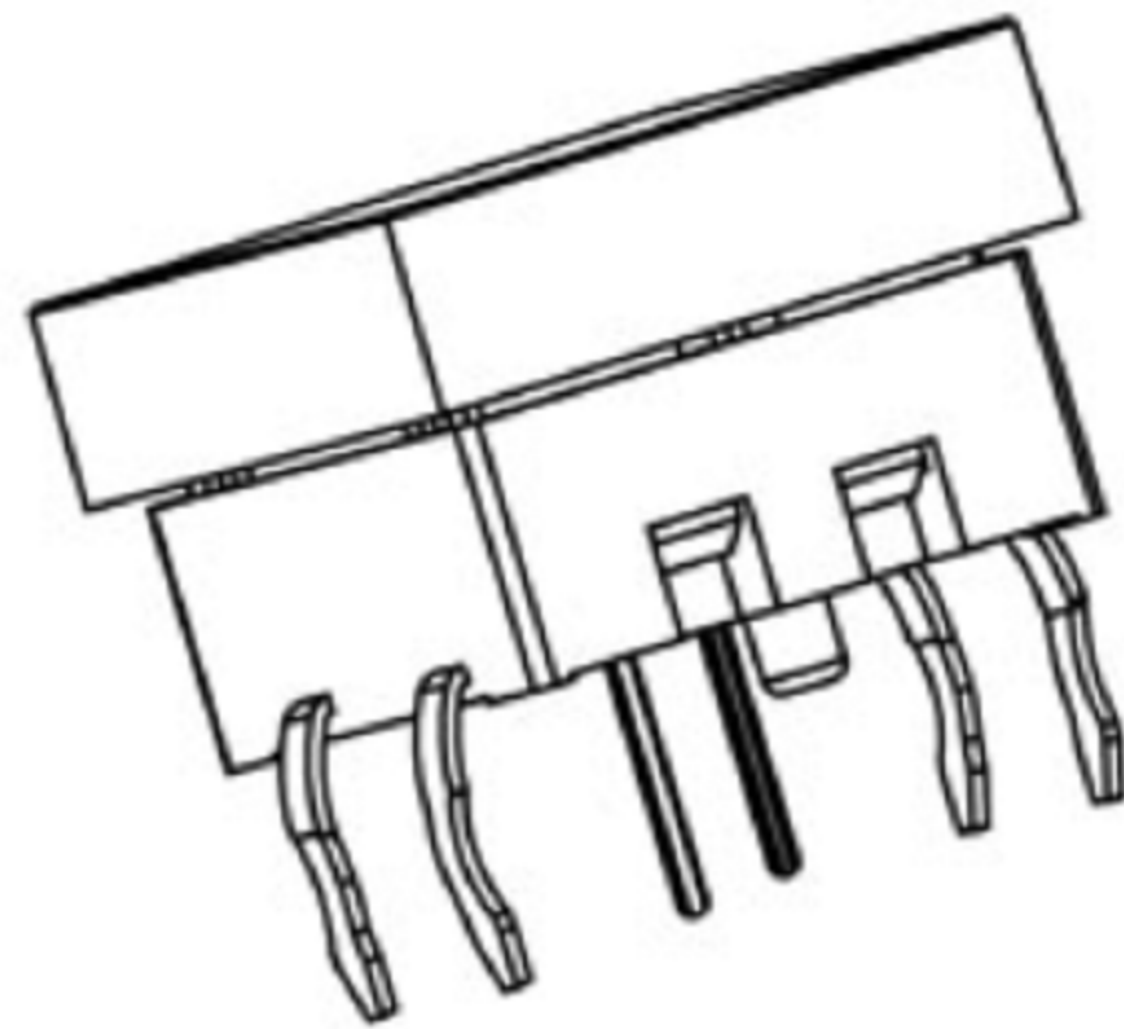



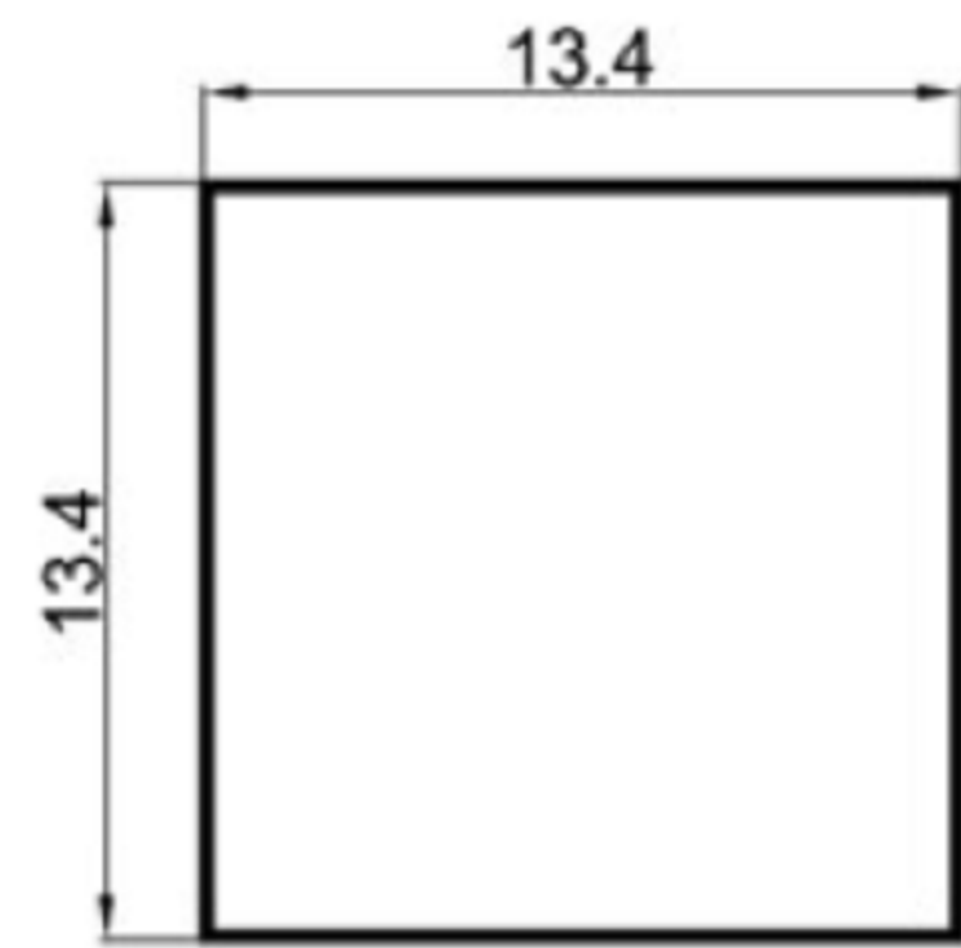


CIRCUIT


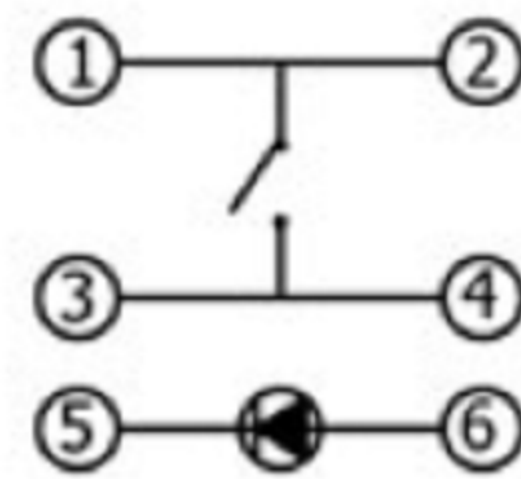


Switch Specifications

Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:250 $\pm$ 50gf
Total travel	:0.4mm $\pm$ 0.15mm
Operating life	:100,000 cycles Min
Solder specifications	:260 $^{\circ}$ C for 5 seconds
Function	:Momentary
Operating temperature	:-20 $^{\circ}$ C ~ +70 $^{\circ}$ C

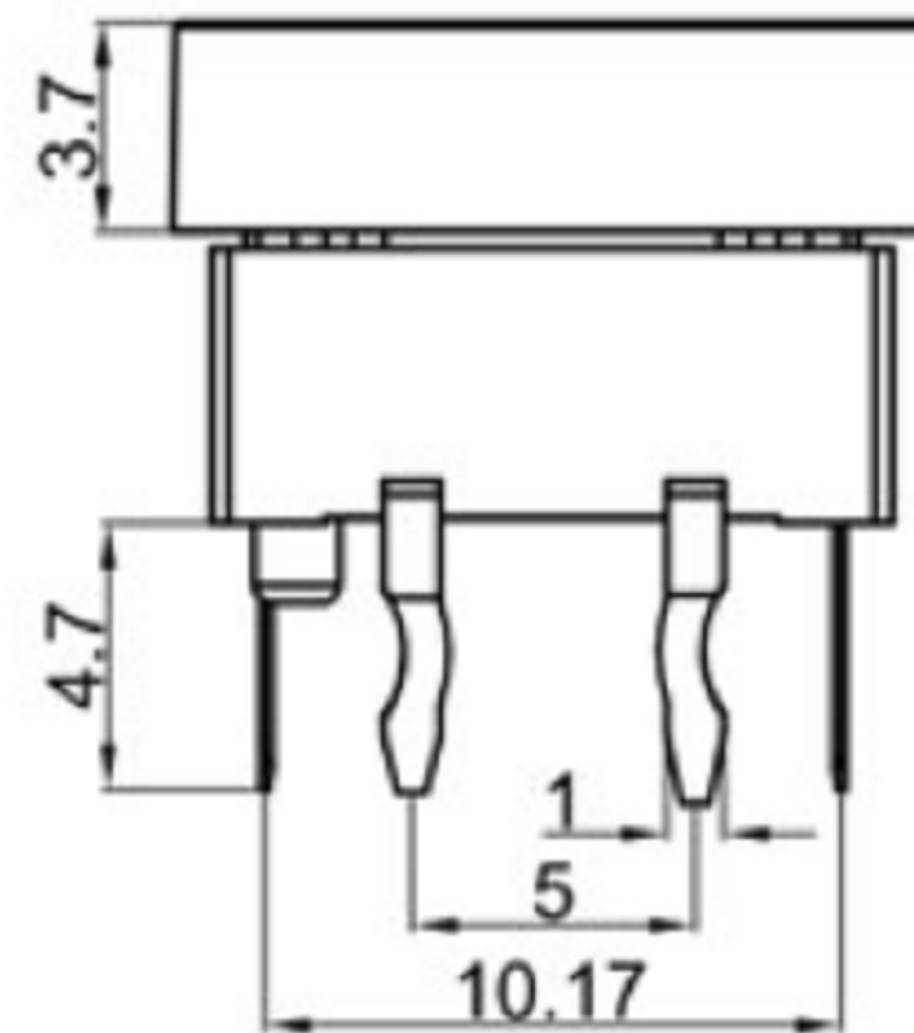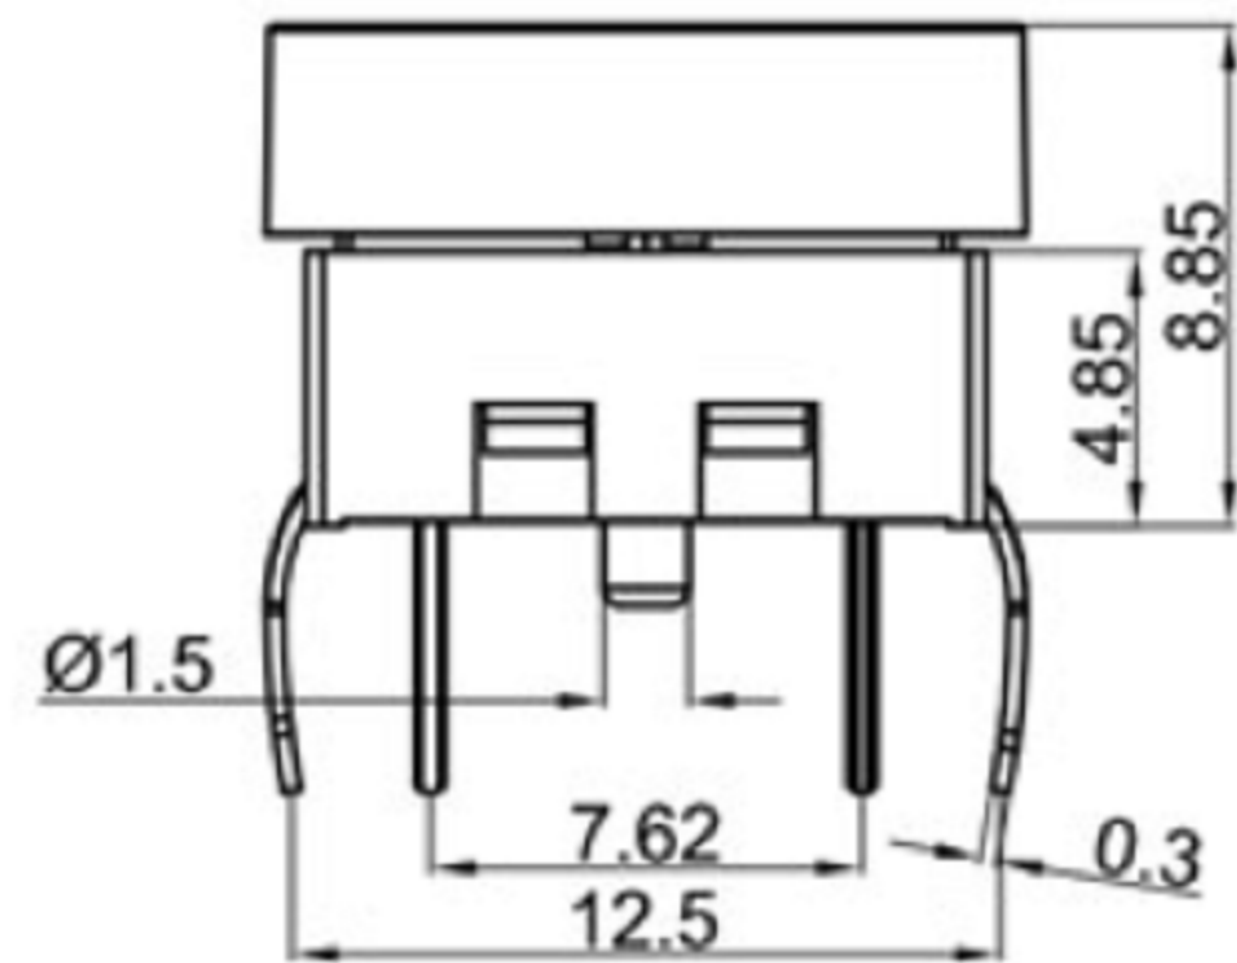

P.C.B.LAYOUT

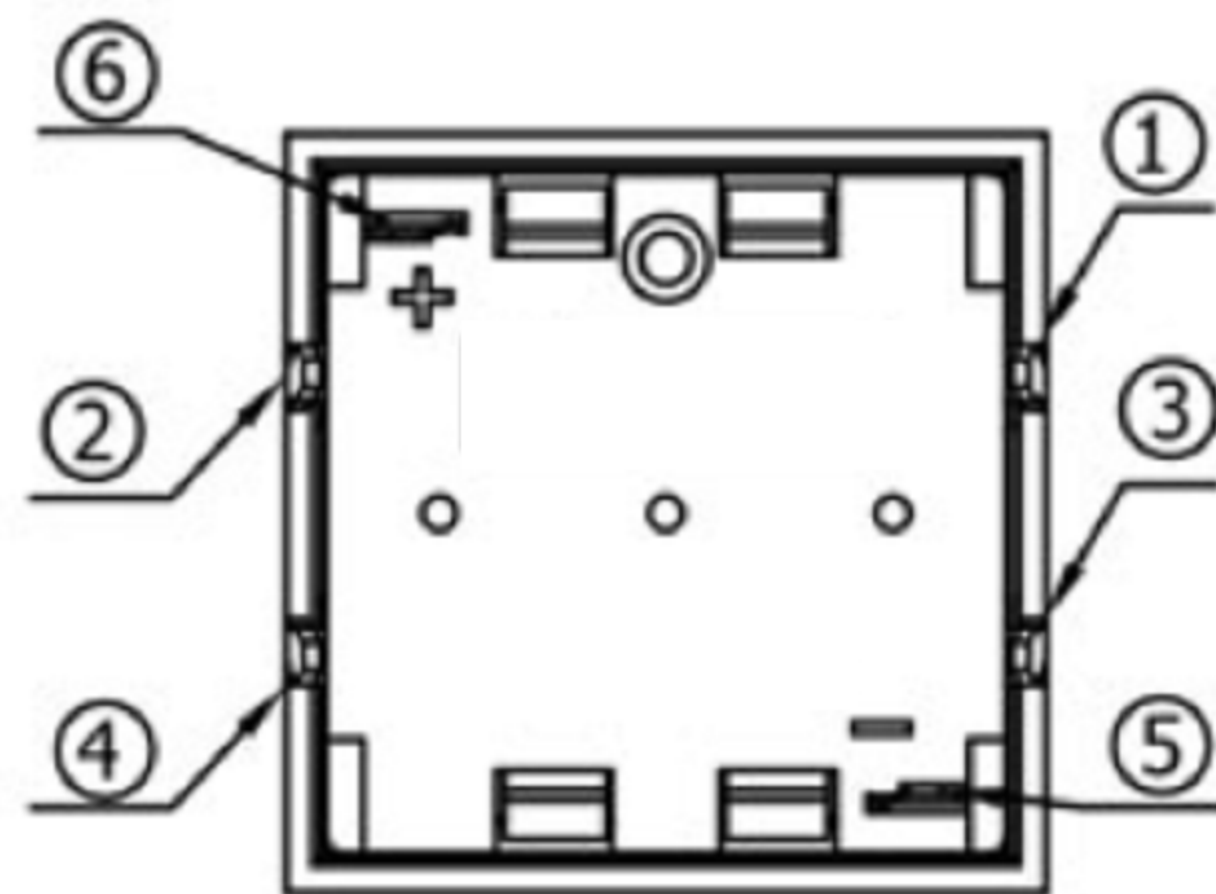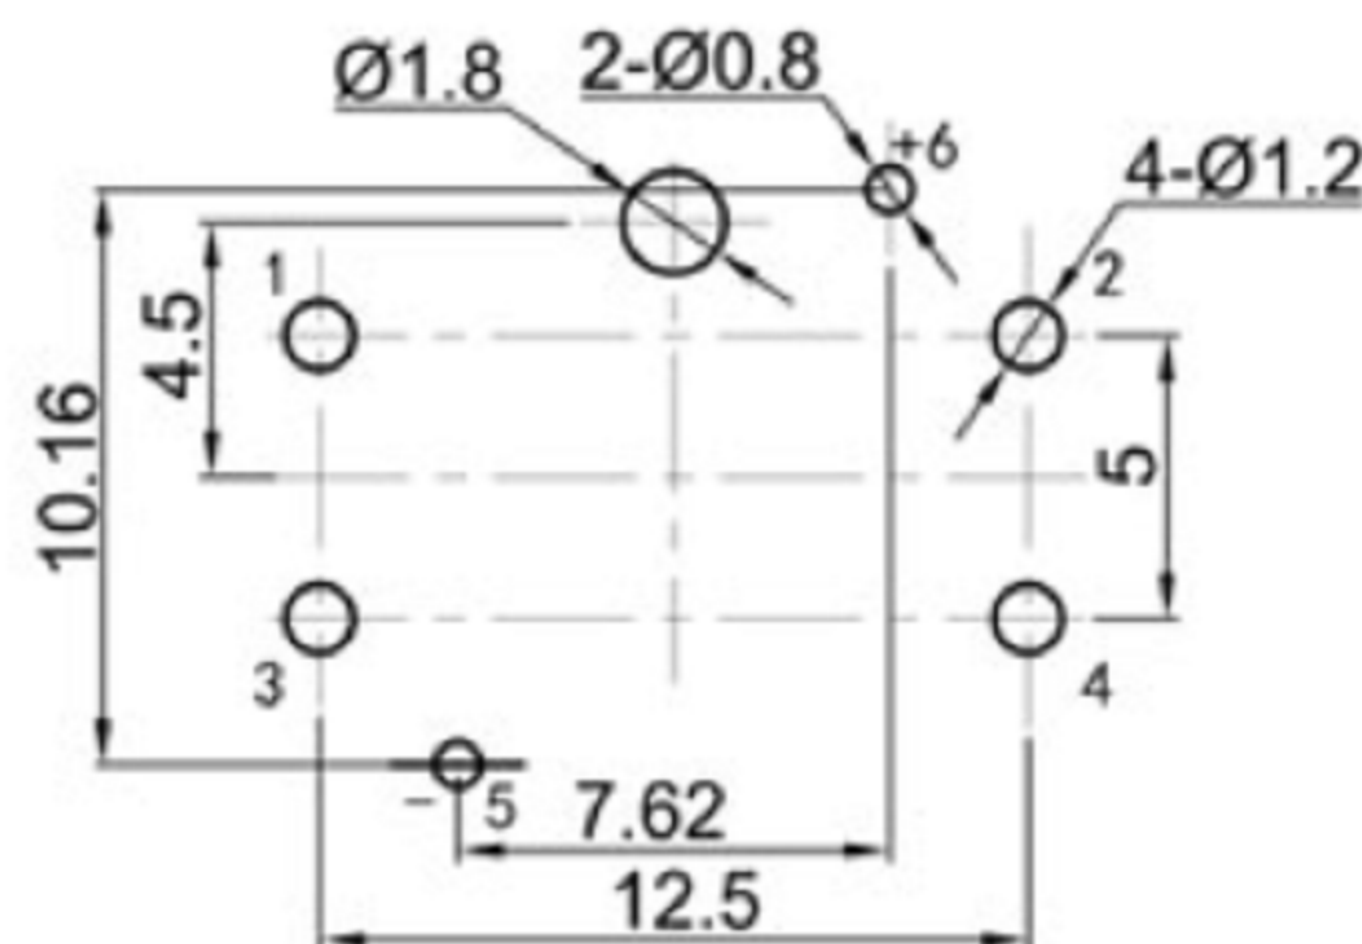

7	CAP	1	ABS / PC	Black
6	LED	1		
5	FIXITY	1	PA66	Black
4	CONTACT	1	PHOSPHOR BRONZE	Ag plated
3	TERMINAL	2	BRASS	Ag plated
2	CASE	1	PA66	Black
1	KNOB	1	PA66	Black/White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING




广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 12/27/22

CHECKED BY: DATE

Jacky Chen 12/27/22

APPROVED BY: DATE

Tony Kao 12/27/22

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH WITH LED

SIZE

A4

VER

R