

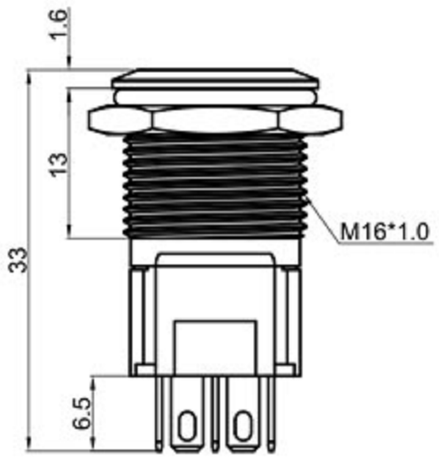

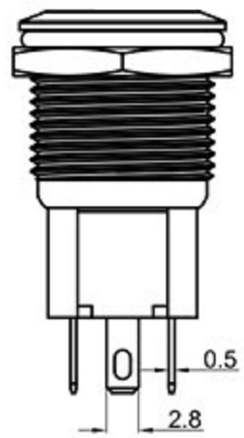

Switch Specifications

Rating: 3A 250VAC ;
2A 36VDC ;
Degree of protction:IP65;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength:1000VAC For 1 minute ;
Total Travel: 3.0± 0.5mm ;
Operating Force:450± 150gf ;
Mechanical Life:200,000 cycles ;
Load Life:50,000 cycles ;
Operating Temperation:-20° C~70° C ;
Function: LOCK





CUT-OUT

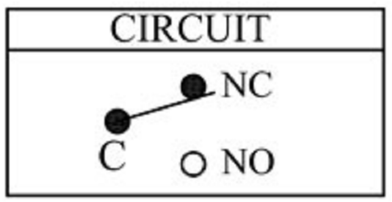



Panel Thinkness: 6mm MAX.

LED Specifications

RGB	红色	1.8	2.0	2.4	15
	绿色	2.8	3.0	3.6	15
	蓝色	2.8	3.0	3.6	15
灯发光颜色 X Emitted color X		最小	一般	最大	额定电流 (mA)
		顺向电压(V)			

ITEM NO.	DESCRIPTION	DRAWN	DATE

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 12/27/22	MAT'L	
CHECKED BY: Jacky Chen	DATE 12/27/22	FINISH	
APPROVED BY: Tony Kao	DATE 12/27/22	SCALE 1 : 1	
		SHEET NO. 1 of 1	

TITLE	SWITCH
MODLE	TACT SWITCH WITH LED
DWG NO.	
PART NO.	
SIZE	A4
VER	R