

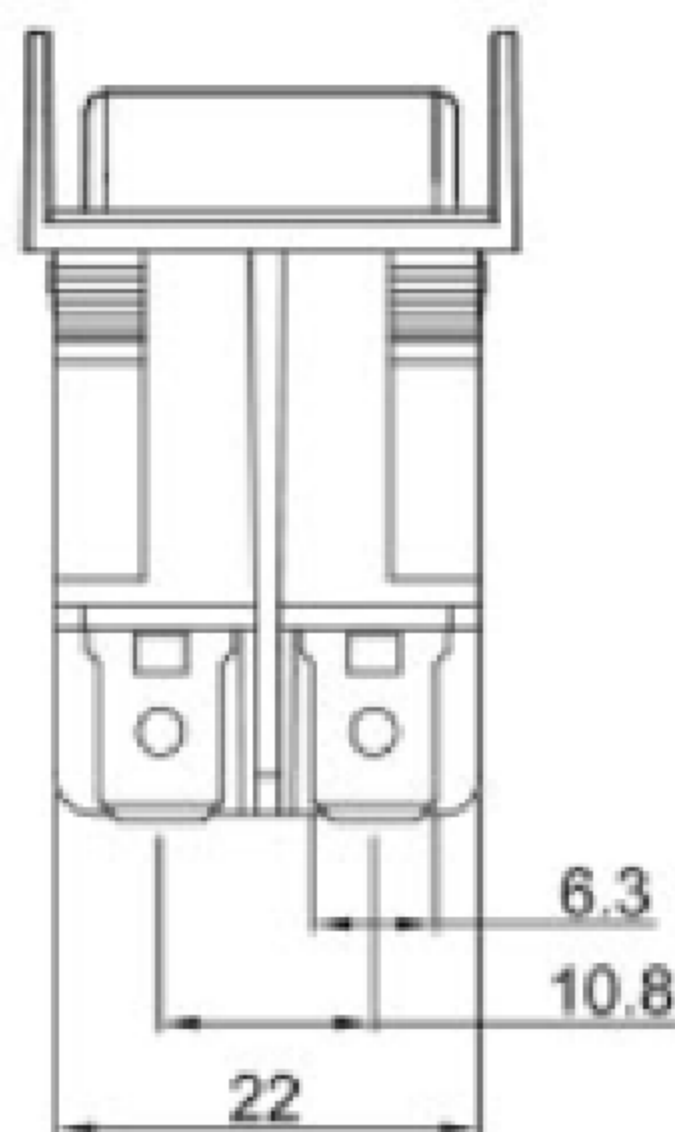
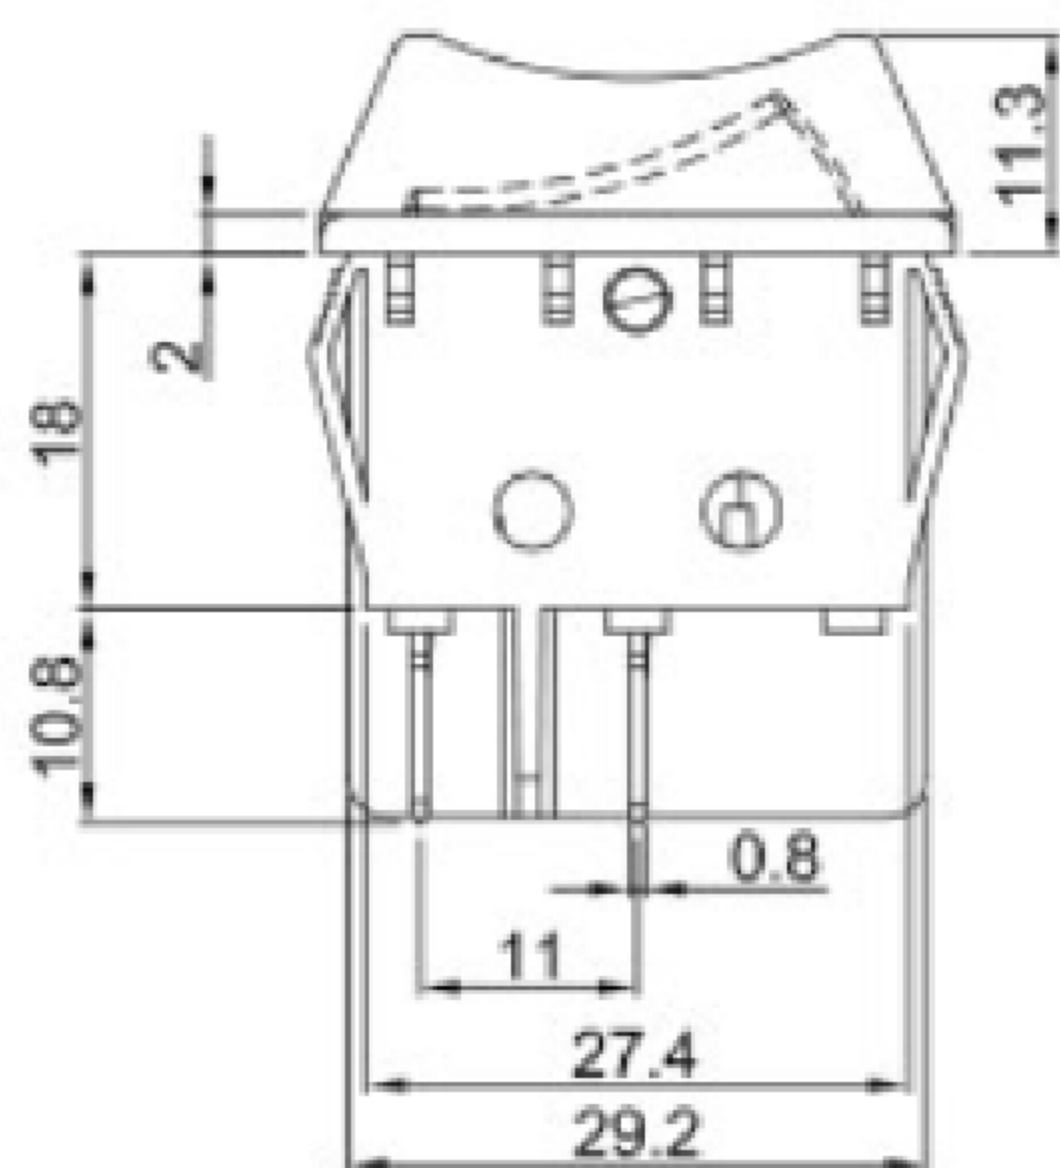


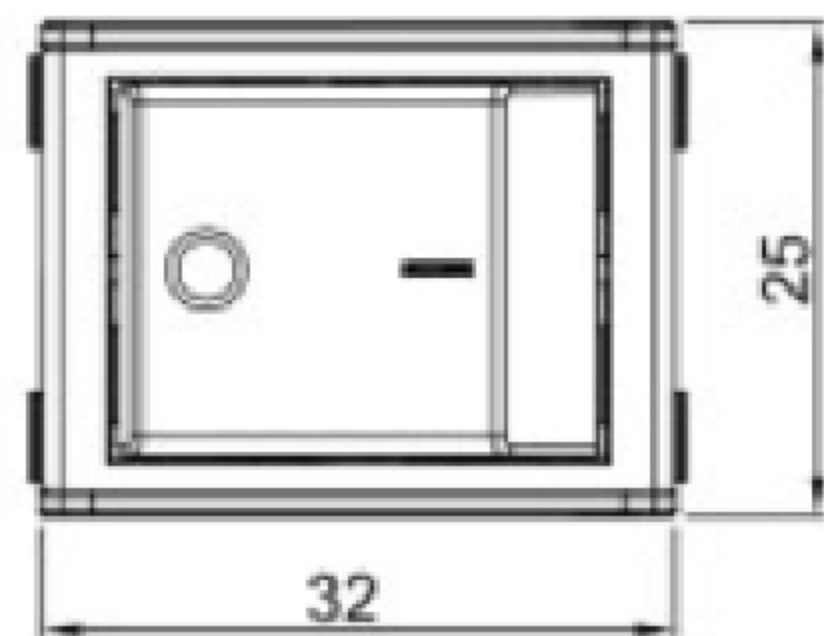


Rating: 20A 125V AC (UL CUL)
22A 250V AC (ENEC CB CQC)
Contact Resistance: 50m Ω Max
Insulation Resistance: DC 500V 100M Ω Min.
Dielectric Strength: AC1500V 1 minute
Operating Force: 350 $\pm$ 150gf
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: -20 $^{\circ}$ C~+85 $^{\circ}$ C
Safety Approval:    

CUT-OUT

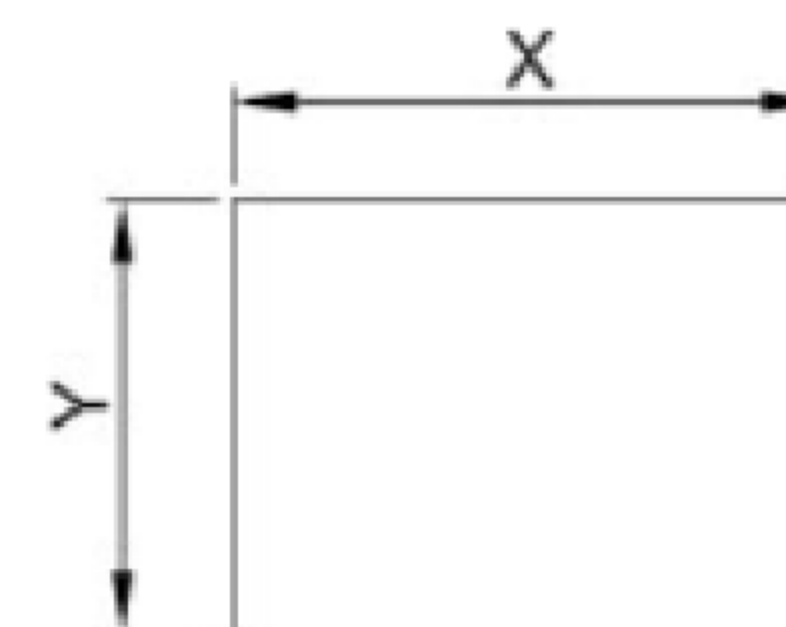

	X	Y
0.75~1.25	30.0+0.1	22.0+0.1
1.25~2.00	30.2+0.1	22.0+0.1
2.00~3.00	30.4+0.1	22.0+0.1

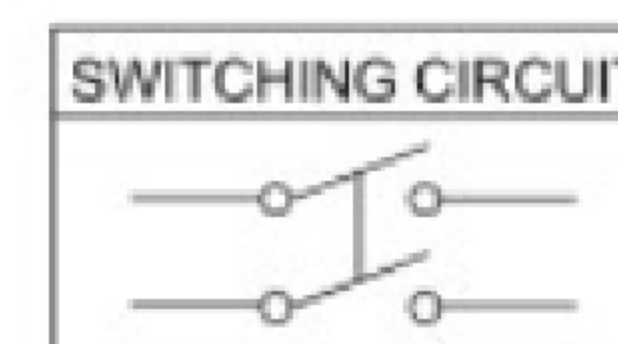


MATERIAL:
Body:Nylon66,UL rated:94V-2 min.
Actuator:Nylon66,UL rated:94V-2 min.
Terminal:Brass,silver or tin plated



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH
Jack Lu	12/27/22	FINISH		MODLE	TACT SWITCH WITH LED
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	
Jacky Chen	12/27/22	SHEET NO.	1 of 1	PART NO.	
APPROVED BY:	DATE				
Tony Kao	12/27/22				