


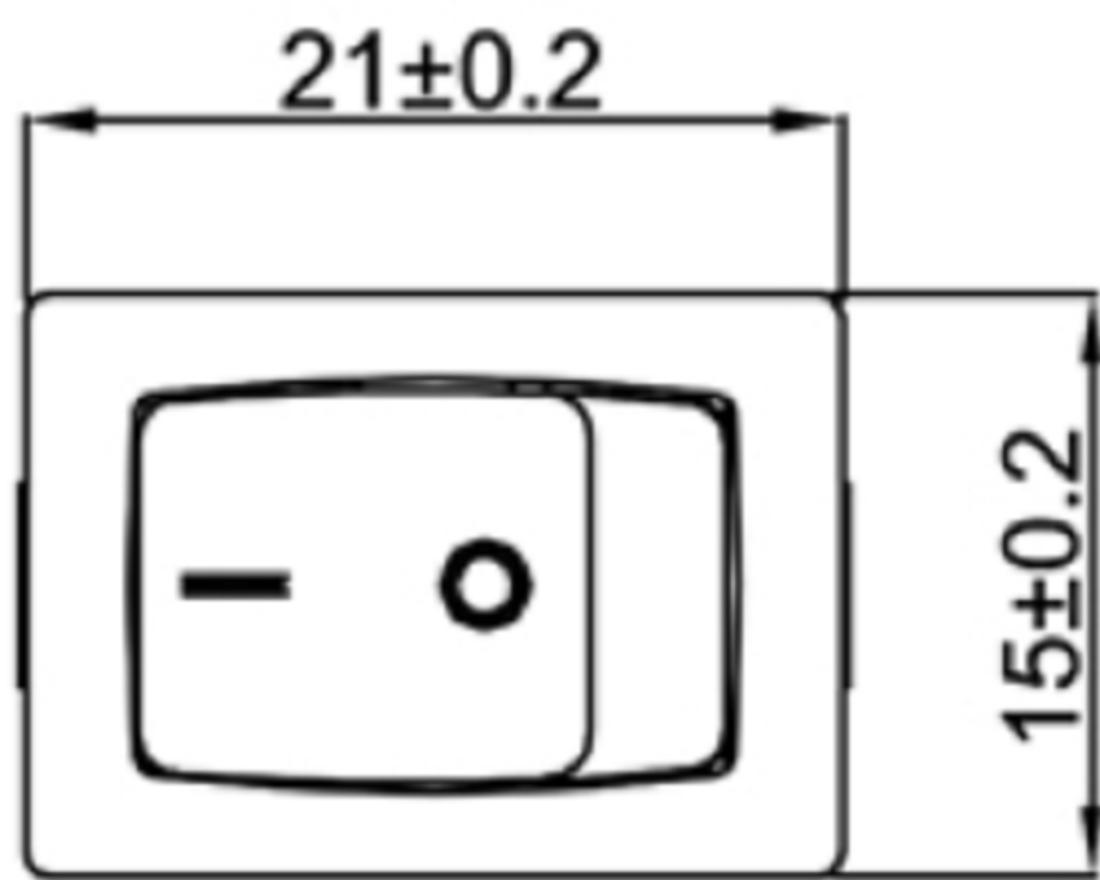
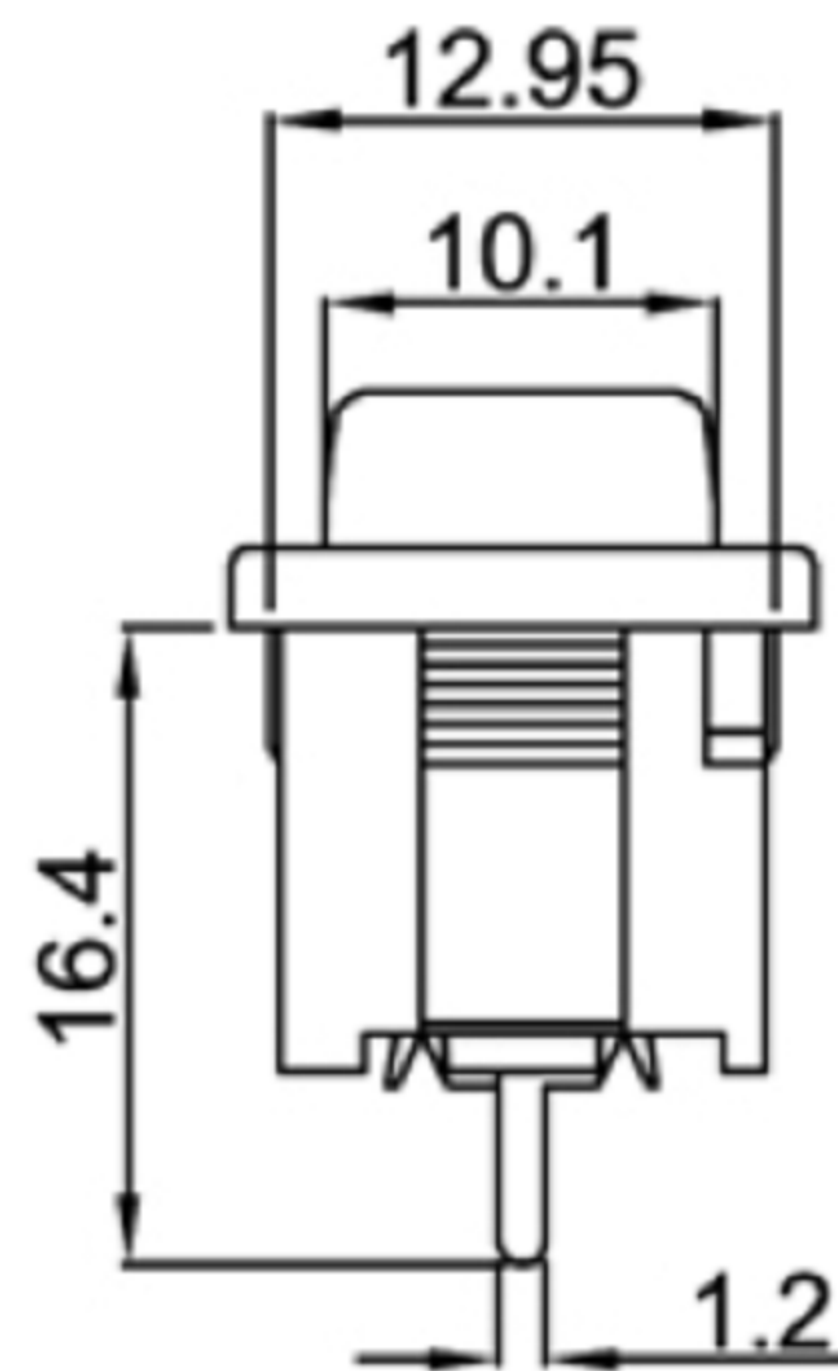


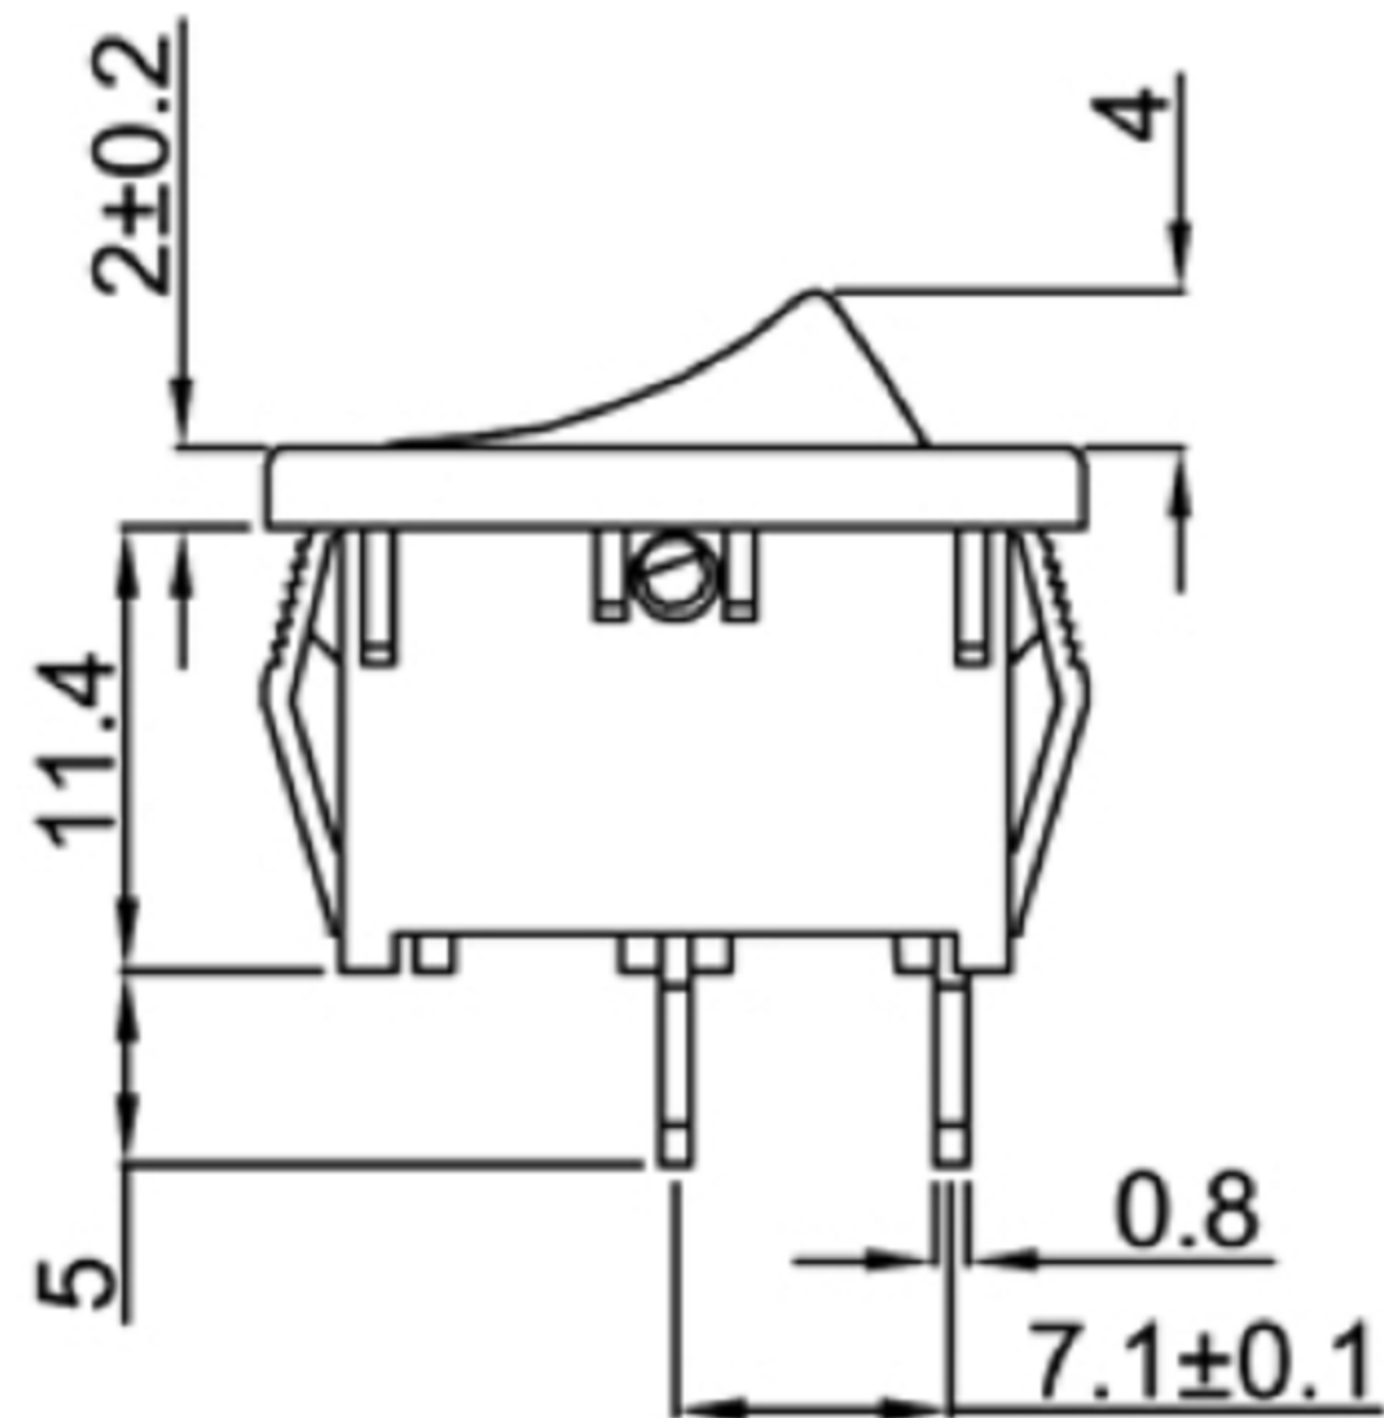

Rating: 12A 125VAC(UL / CUL)
10A 250VAC(CQC / ENEC/CB)
Contact Resistance: 50m Ω max
Insulation Resistance: DC 500V 100M Ω min.
Dielectric Strength: AC 1500V 1 minute
Operating Force: 350 $\pm$ 100gf
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: 0°C ~ 85°C
Safety Approval:    

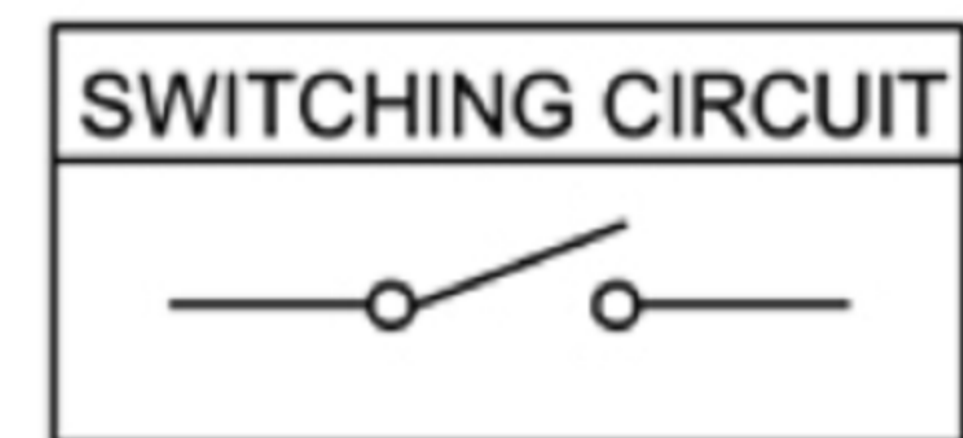

CUT-OUT

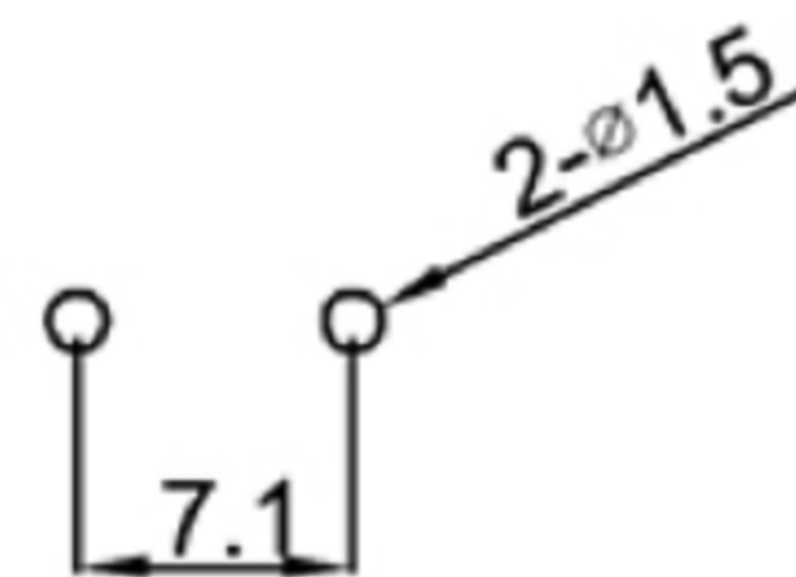


广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 12/27/22

CHECKED BY: DATE

Jacky Chen 12/27/22

APPROVED BY: DATE

Tony Kao 12/27/22

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH WITH LED

SIZE

A4

VER

R