

A

B







C

D

E

F


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	FangSongLe	2020/04/06

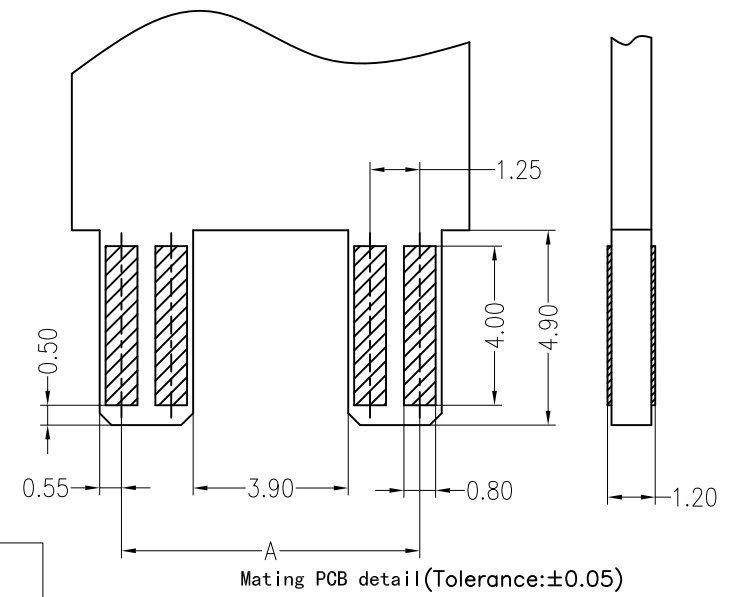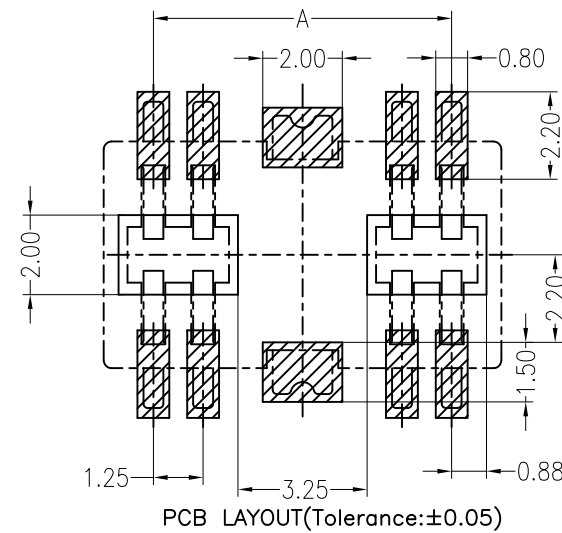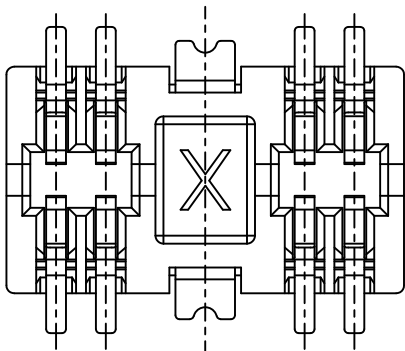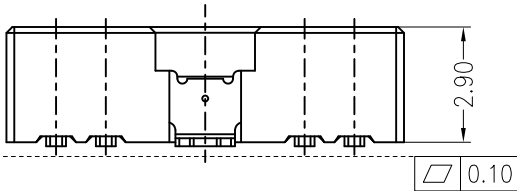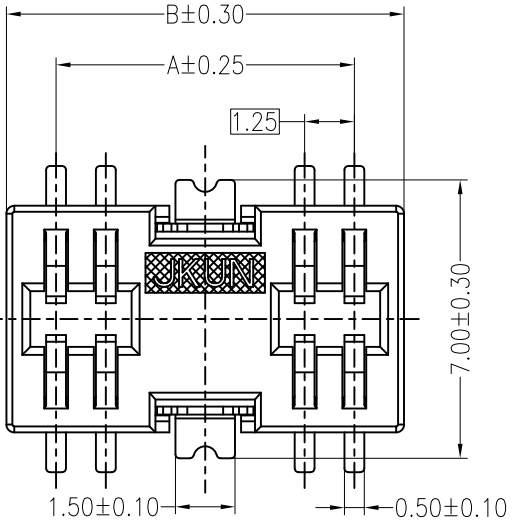

Specifications:
Contact resistance:≤20mΩ
Insulation resistance:≥1000MΩ
Rated voltage:125V AC DC
Rated current:1.0A AC DC
Withstand Voltage: 1000V AC/minute
Temperature Range:−25℃~ +105℃
Housing:LCP UL94V−0,BEIGE
Contacts:PhosphorBronze/MATTE Sn-plated

ORDER INFORMATION:

L1251AWV-2**-F8MB1-R	
PART No.	PACKAGING: R=REEL
No.OF CIRCUITS: 08-12	Metal code: 1=PhosphorBronze
PLASTIC MATERIAL: F8M=LCP(BEIGE)	PLATING: B=MATTE Sn



PIN	DIM A	DIM B
*2x4	7.50	10.00
*2x6	10.00	12.50

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

GENERAL TOLERANCE		USE:	PART NO.: L1251AWV-2**-F8MB1-R	
X. ±0.50	X. ±5'	CUSTOMER		DWG NO.: GCKH-2024
X.X ±0.30	X.X ±2'	APPD: Liuzhengling		
X.XX ±0.20	X.XX ±1'	CHKD: Steven		SHEET 1 / 1
		DR: FangSongLe		

TITLE: -	
PART NO.: L1251AWV-2**-F8MB1-R	
DWG NO.: GCKH-2024	
SCALE 1 : 1	SHEET 1 / 1