


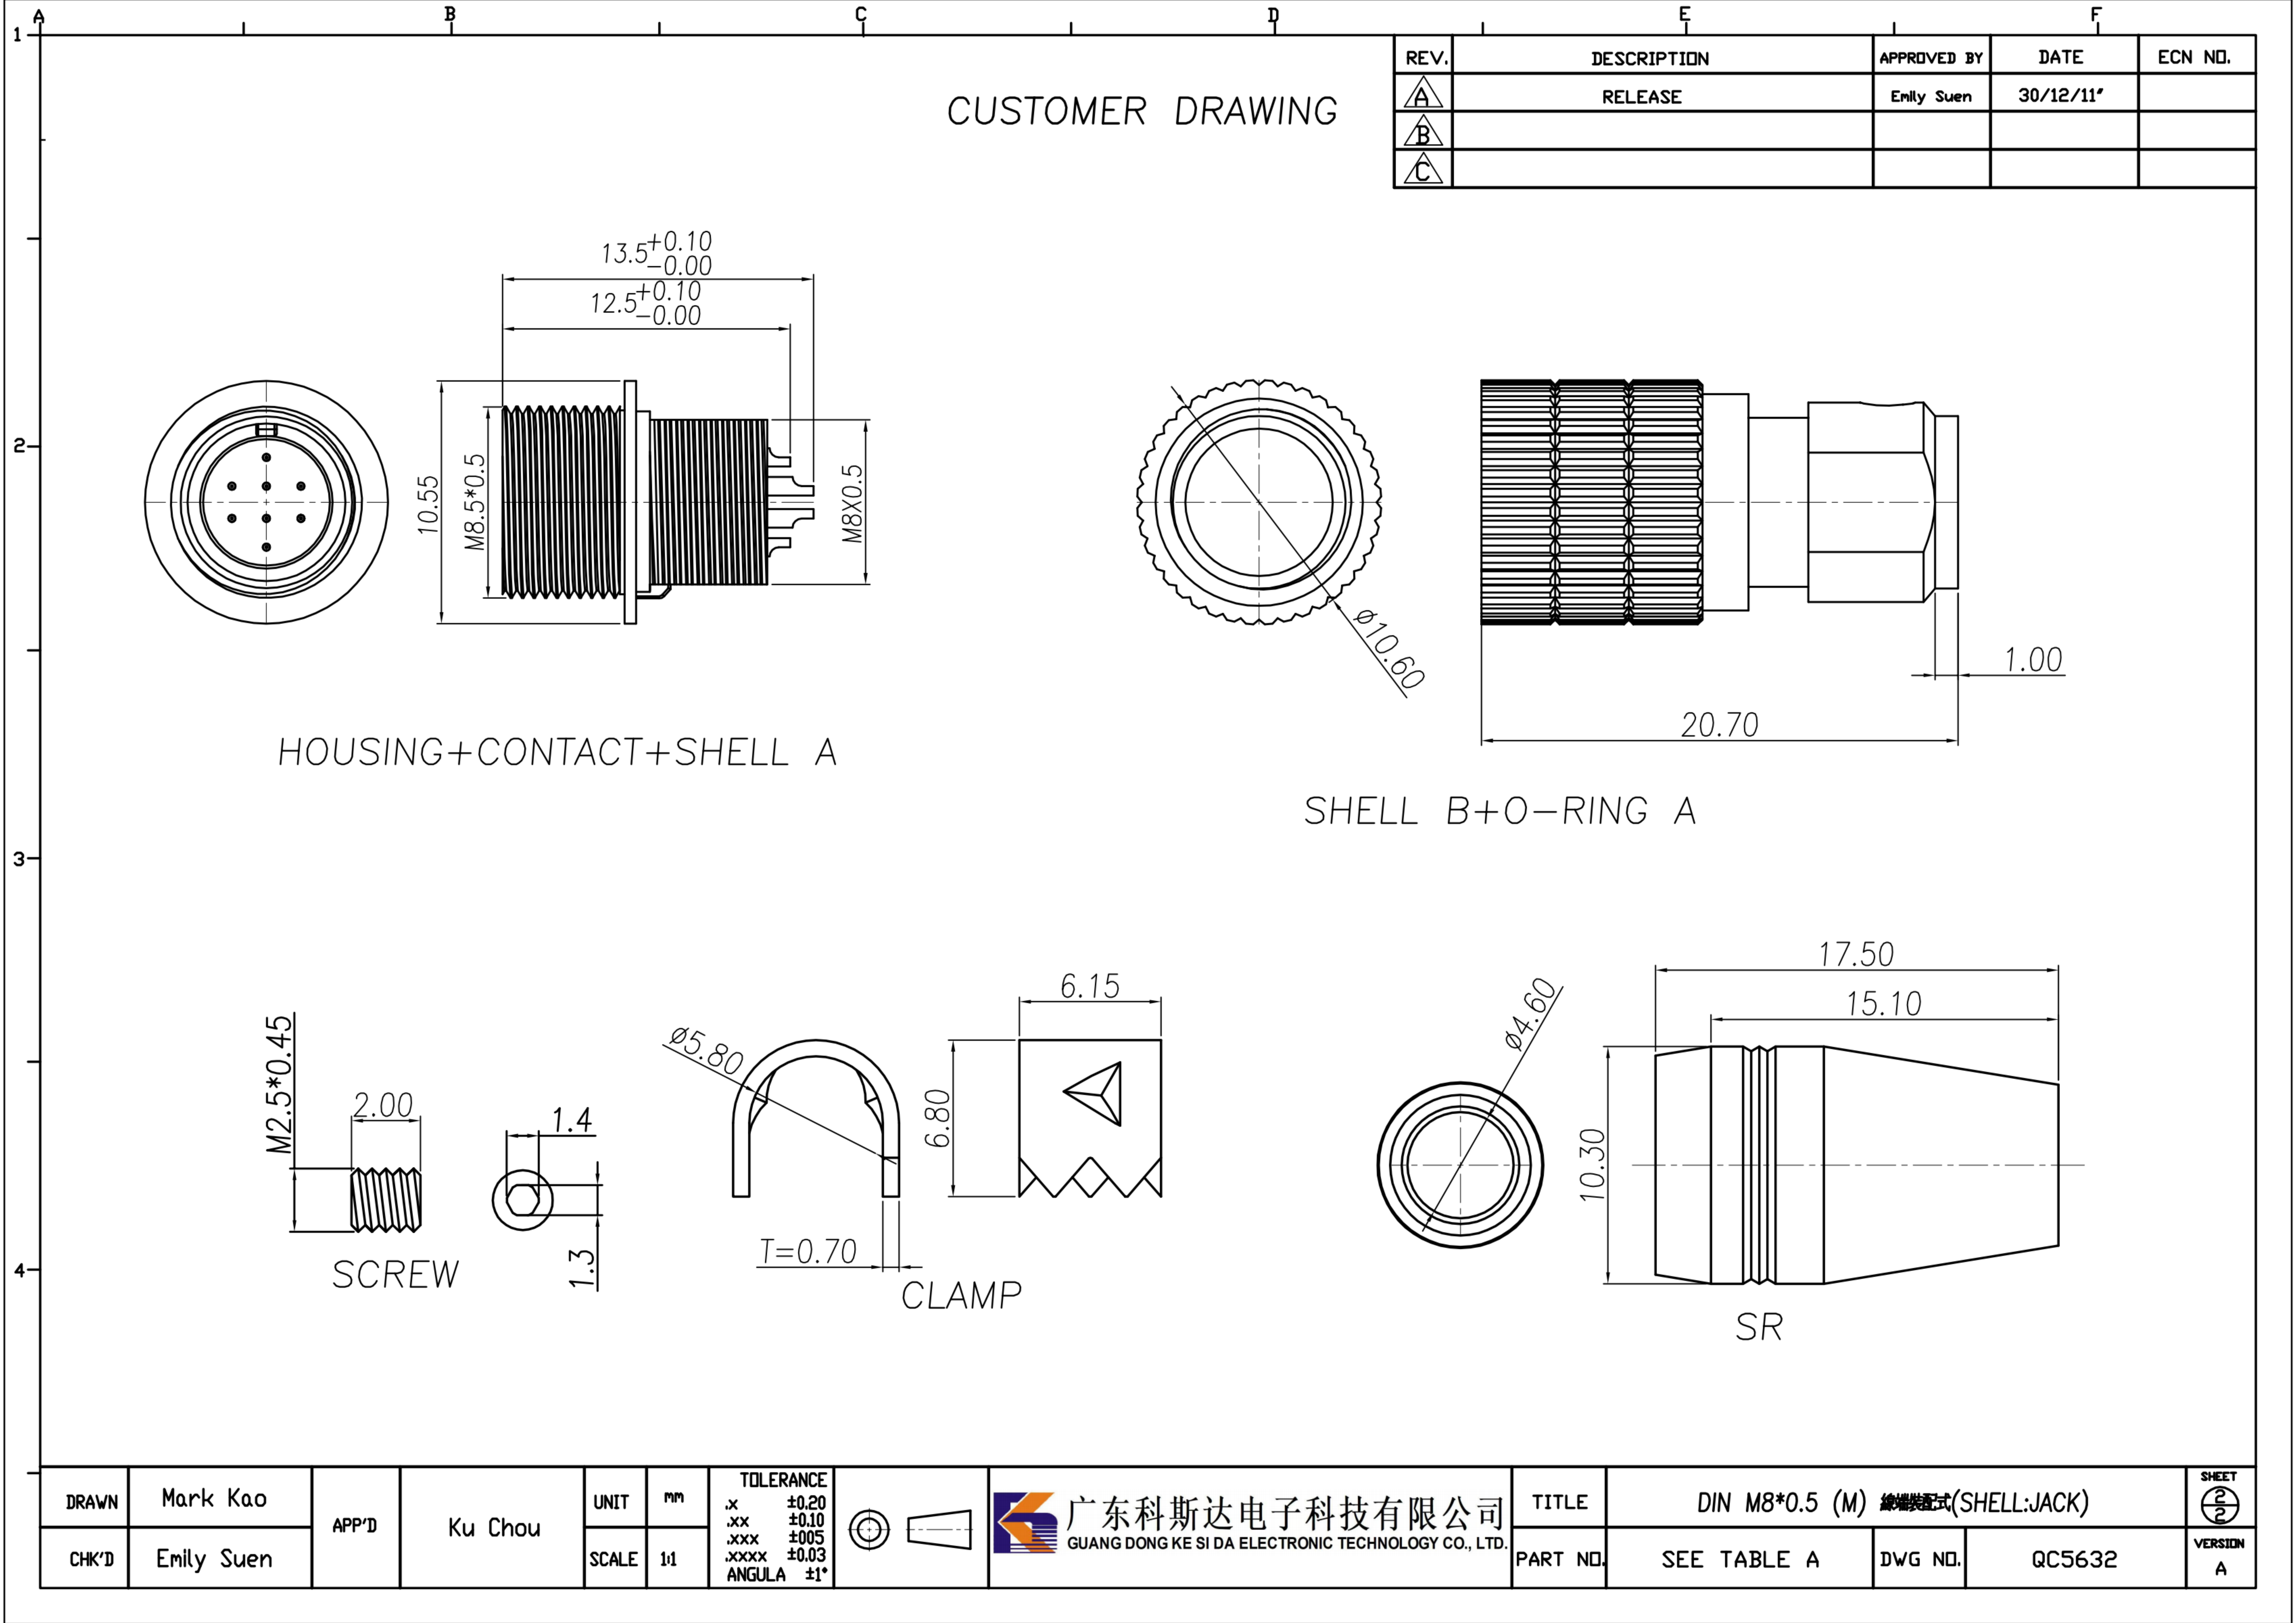

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Emily Suen	30/12/11'	
B	CHANGE MATERIAL	Emily Suen	15/09/22'	
C				

1. MATERIAL :

- 1-1. HOUSING : NYLON 66 UL94V-0 ; COLOR : BLACK
1-2. CONTACT : BRASS
1-3. SHELL A : Zinc Alloy
1-4. SHELL B : BRASS
1-5. O-RING A : NBR; COLOR : BLACK
1-6 SCREW : ALLOY STEEL
1-7. CLAMP : BRASS
1-8. SR : TPR

2. FINISH :

- 2-1. CONTACT A : 10 MICRO INCHES MIN. GOLD PLATED
2-2. SHELL A : NICKEL PLATED 60u" ~ 100u" OVER ALL
2-3. SHELL B : NICKEL PLATED 60u" ~ 100u" OVER ALL
2-4 SCREW : NICKEL PLATED 60u" ~ 100u" OVER ALL

3. ELECTRICAL SPECIFICATION :

- 3-1. Rated current : 1A
3-2. Rated voltage : 30V AC , 42V DC

4. Environmental :

- 4-1. Operation Temperature : -25℃~85℃

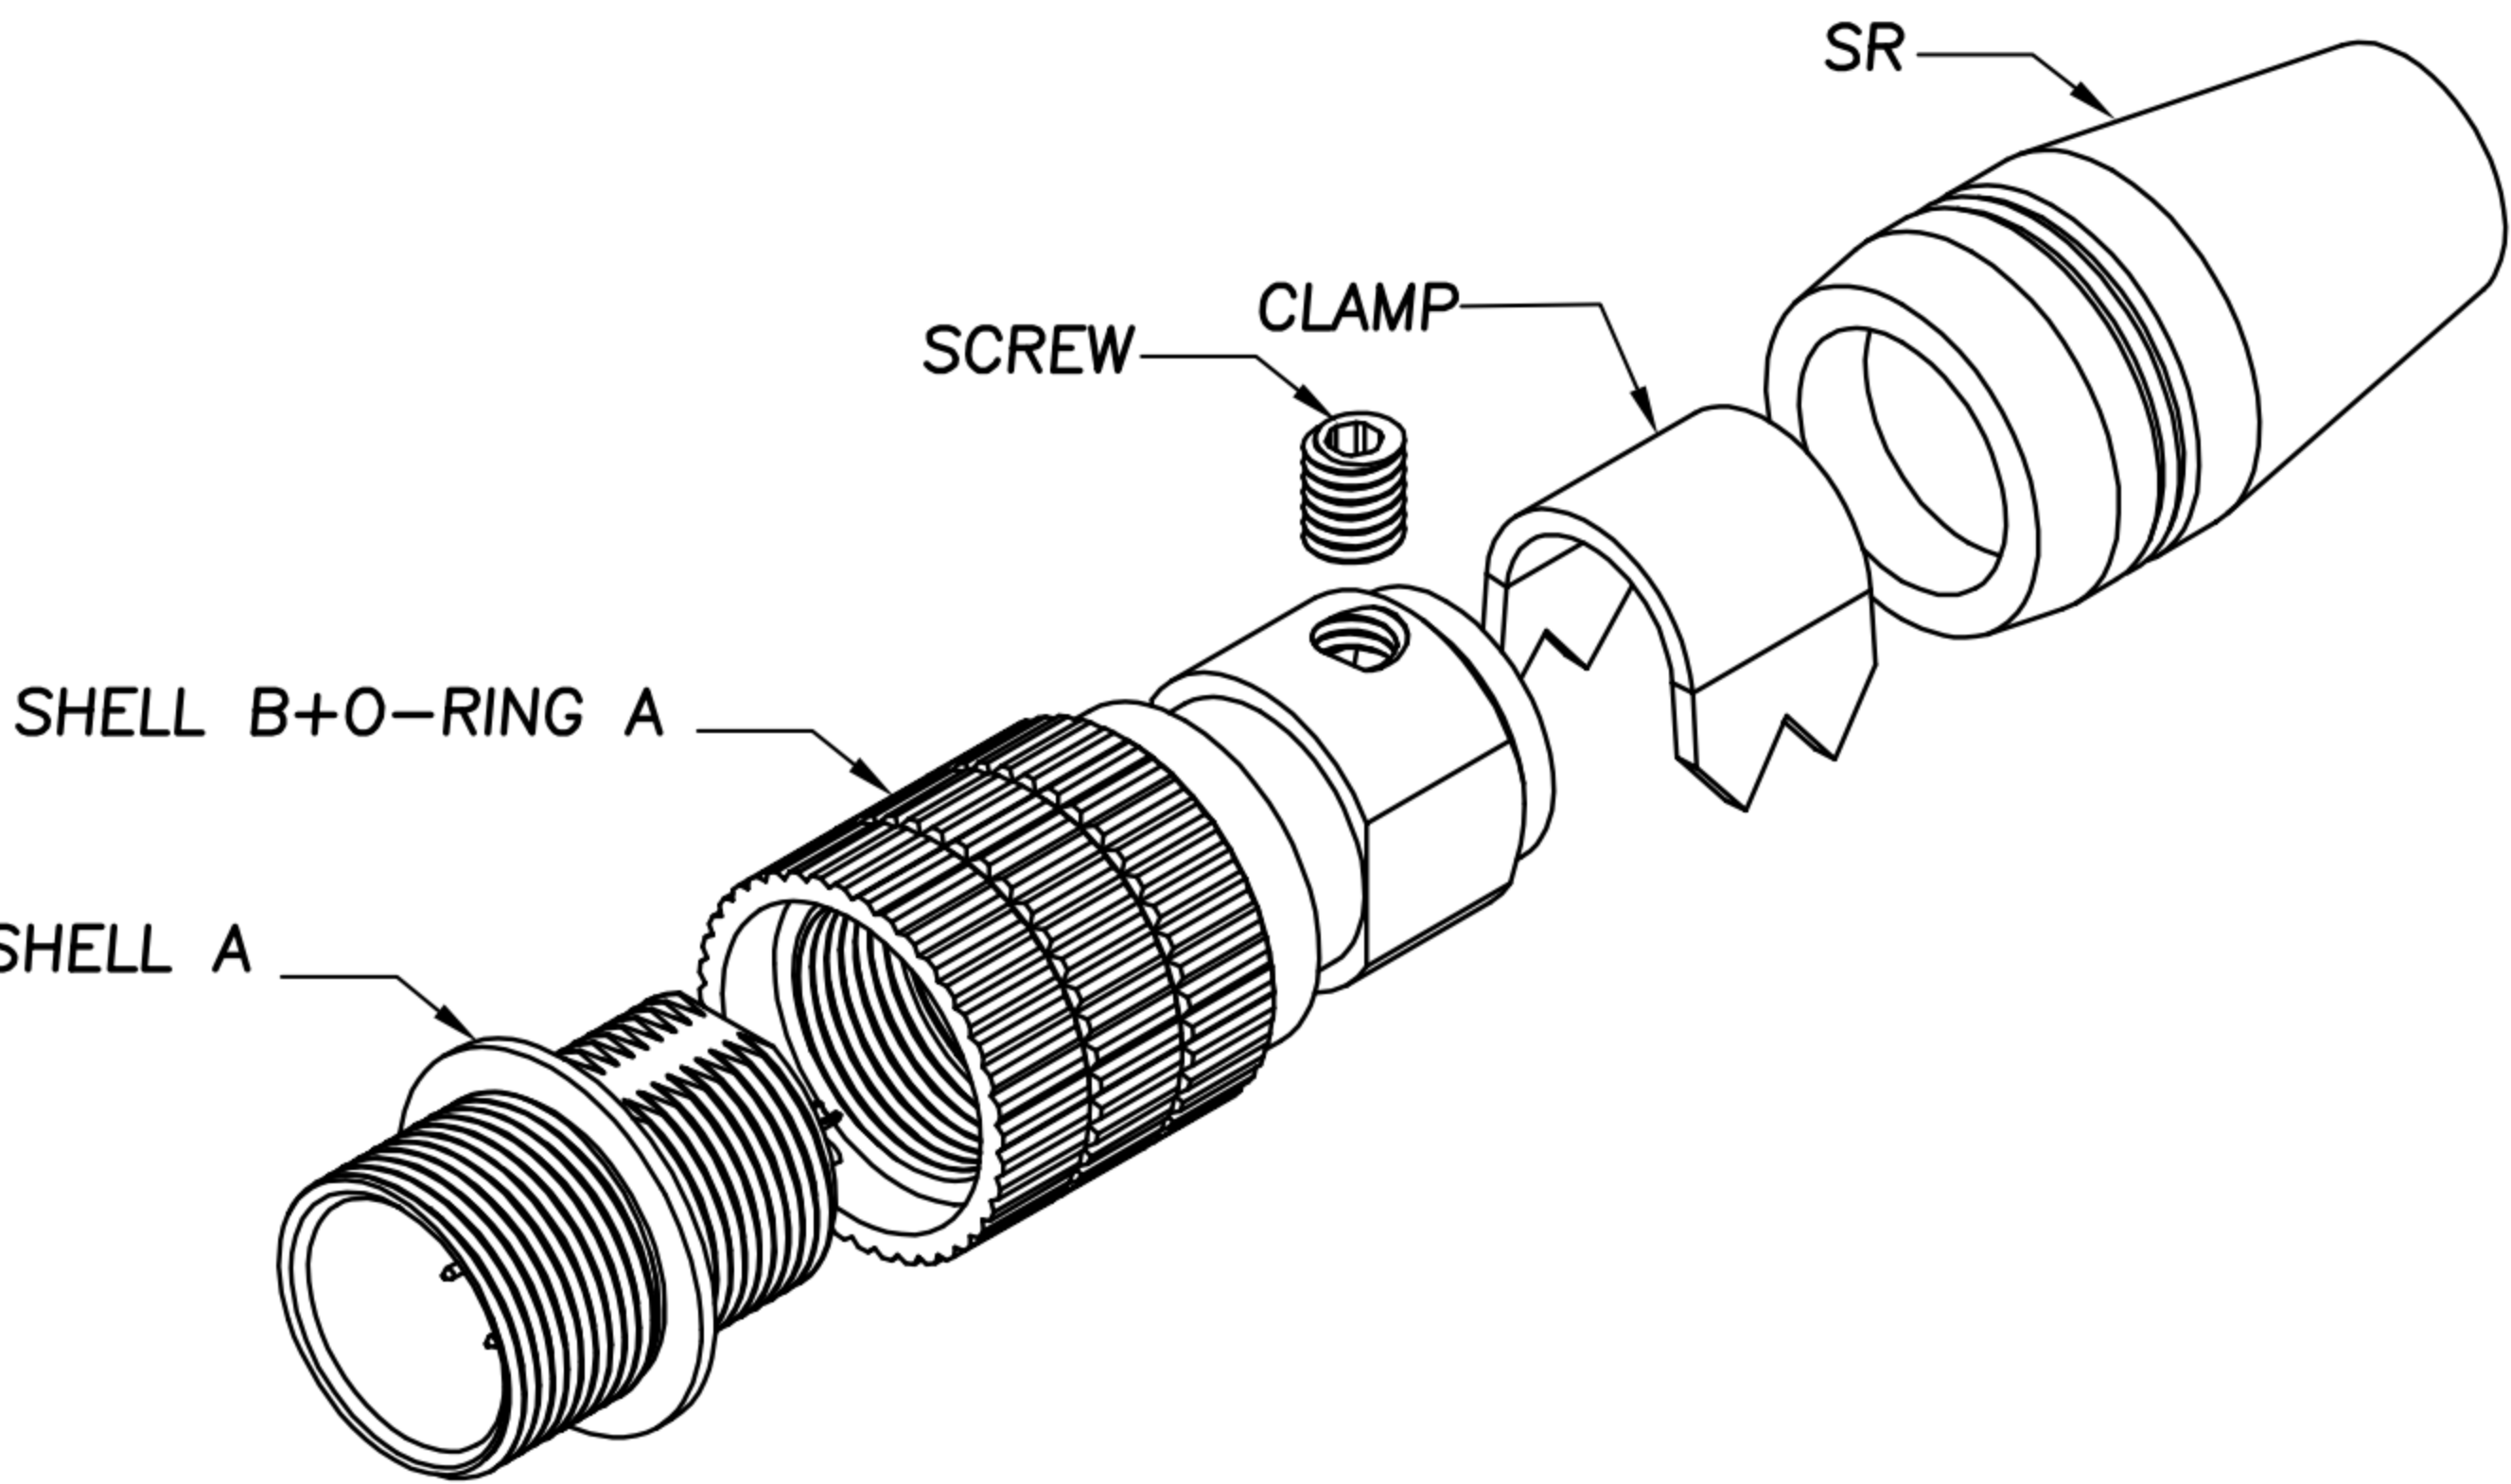
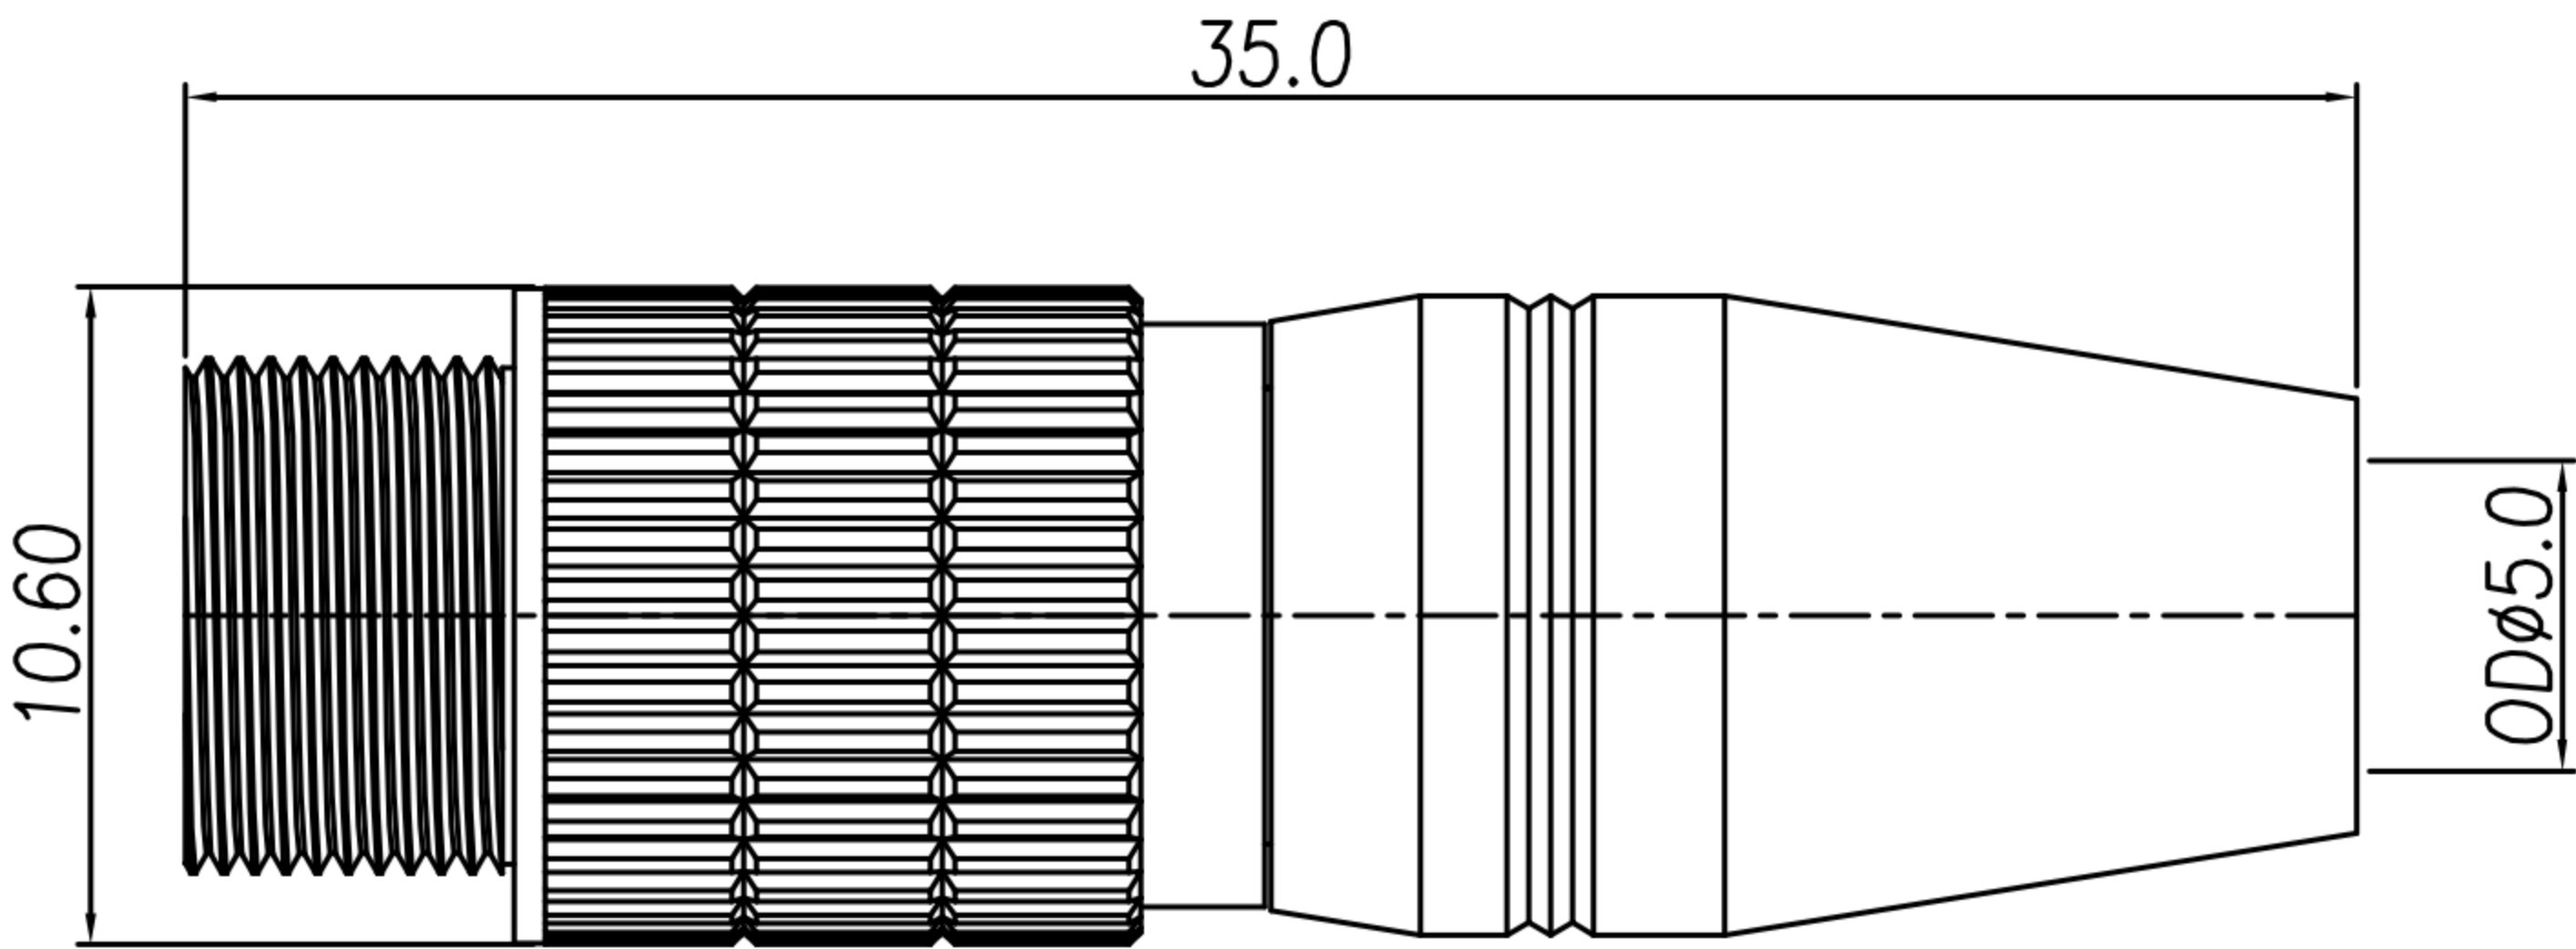
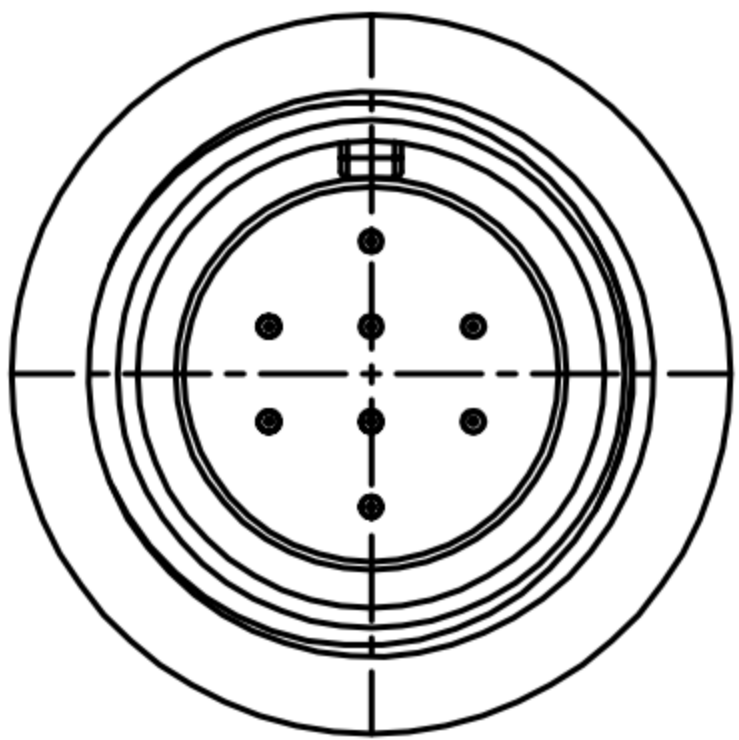


TABLE A

DI-04M2-04(4P)	DI-06M2-03(6P)	DI-08M2-07(8P)

DRAWN	Mark Kao	APP'D	Ku Chou	UNIT	mm	TOLERANCE			广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	DIN M8*0.5 (M) 線端式(SHELL:JACK)			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC5632	VERSION B