


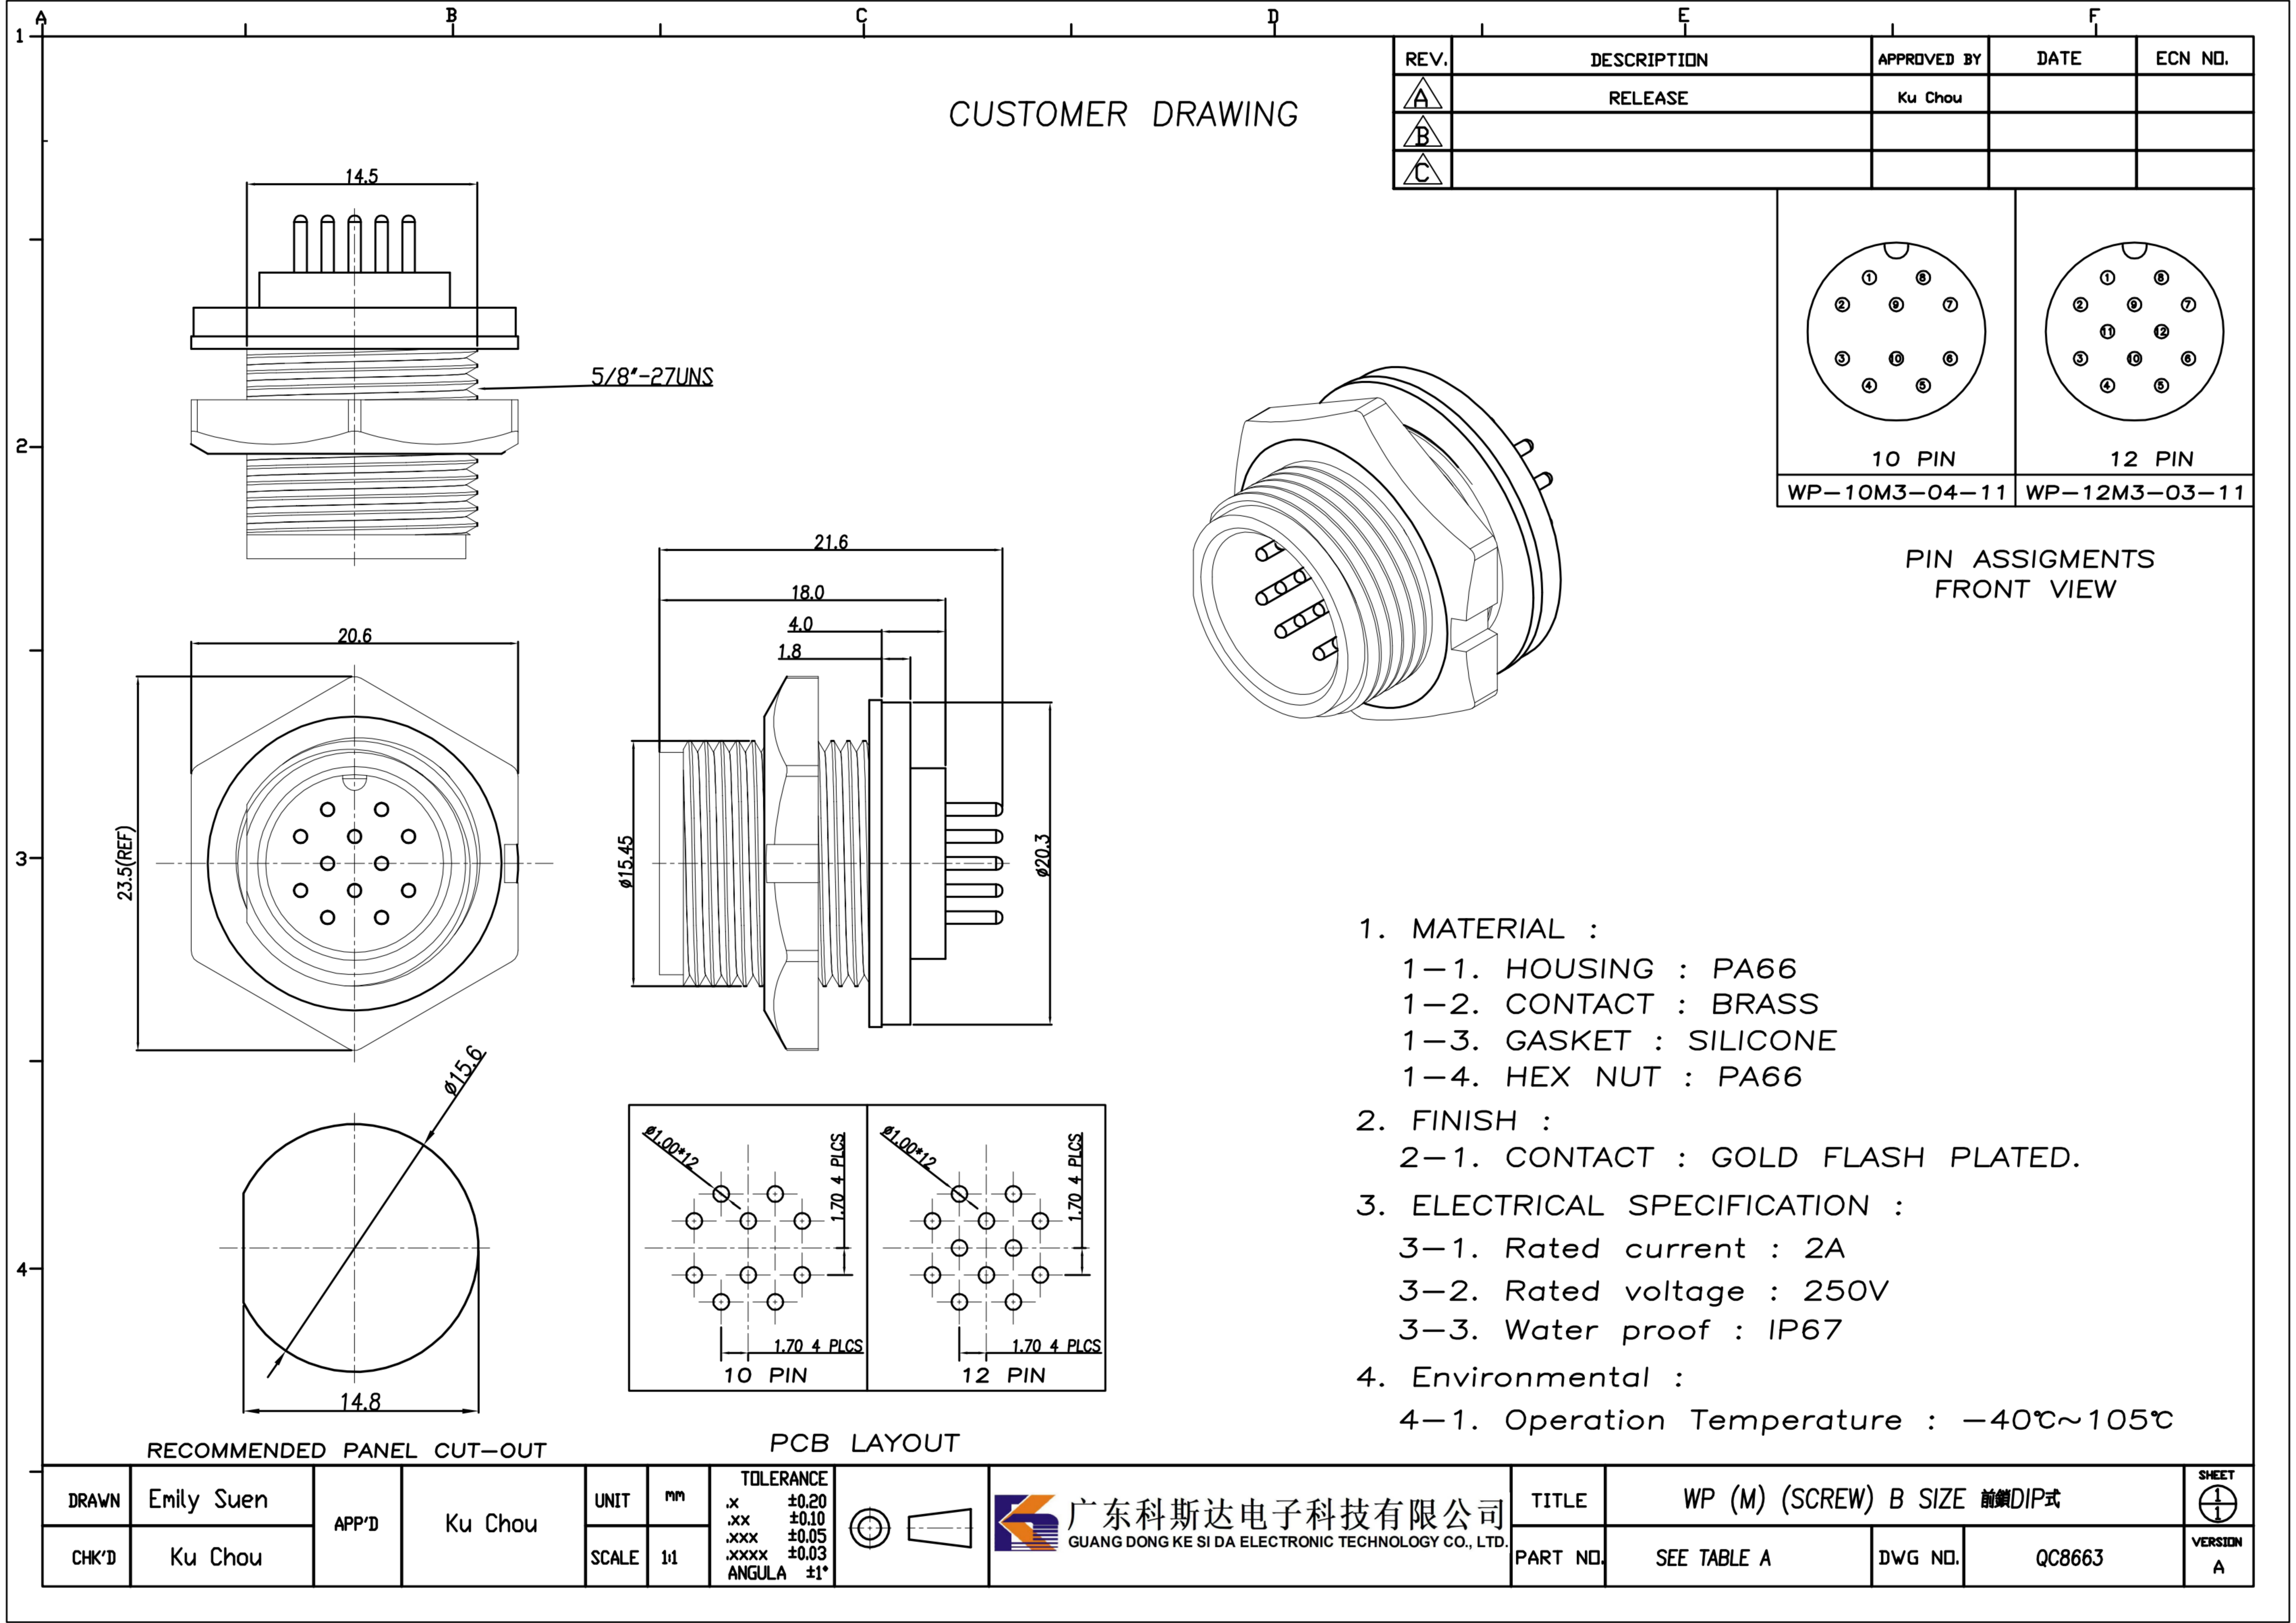

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou		
B				
C				

10 PIN	12 PIN
WP-10M3-04-11	WP-12M3-03-11

PIN ASSIGMENTS
FRONT VIEW

1. MATERIAL :
1-1. HOUSING : PA66
1-2. CONTACT : BRASS
1-3. GASKET : SILICONE
1-4. HEX NUT : PA66
2. FINISH :
2-1. CONTACT : GOLD FLASH PLATED.
3. ELECTRICAL SPECIFICATION :
3-1. Rated current : 2A
3-2. Rated voltage : 250V
3-3. Water proof : IP67
4. Environmental :
4-1. Operation Temperature : -40℃~105℃

RECOMMENDED PANEL CUT-OUT

PCB LAYOUT

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE				TITLE	WP (M) (SCREW) B SIZE 前鎖DIP式			SHEET
CHK'D	Ku Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC8663	VERSION A