

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	20/07/18'	
B	CHANGE CLAMP RING MATERIAL	Ku Chou	31/10/18'	
C				

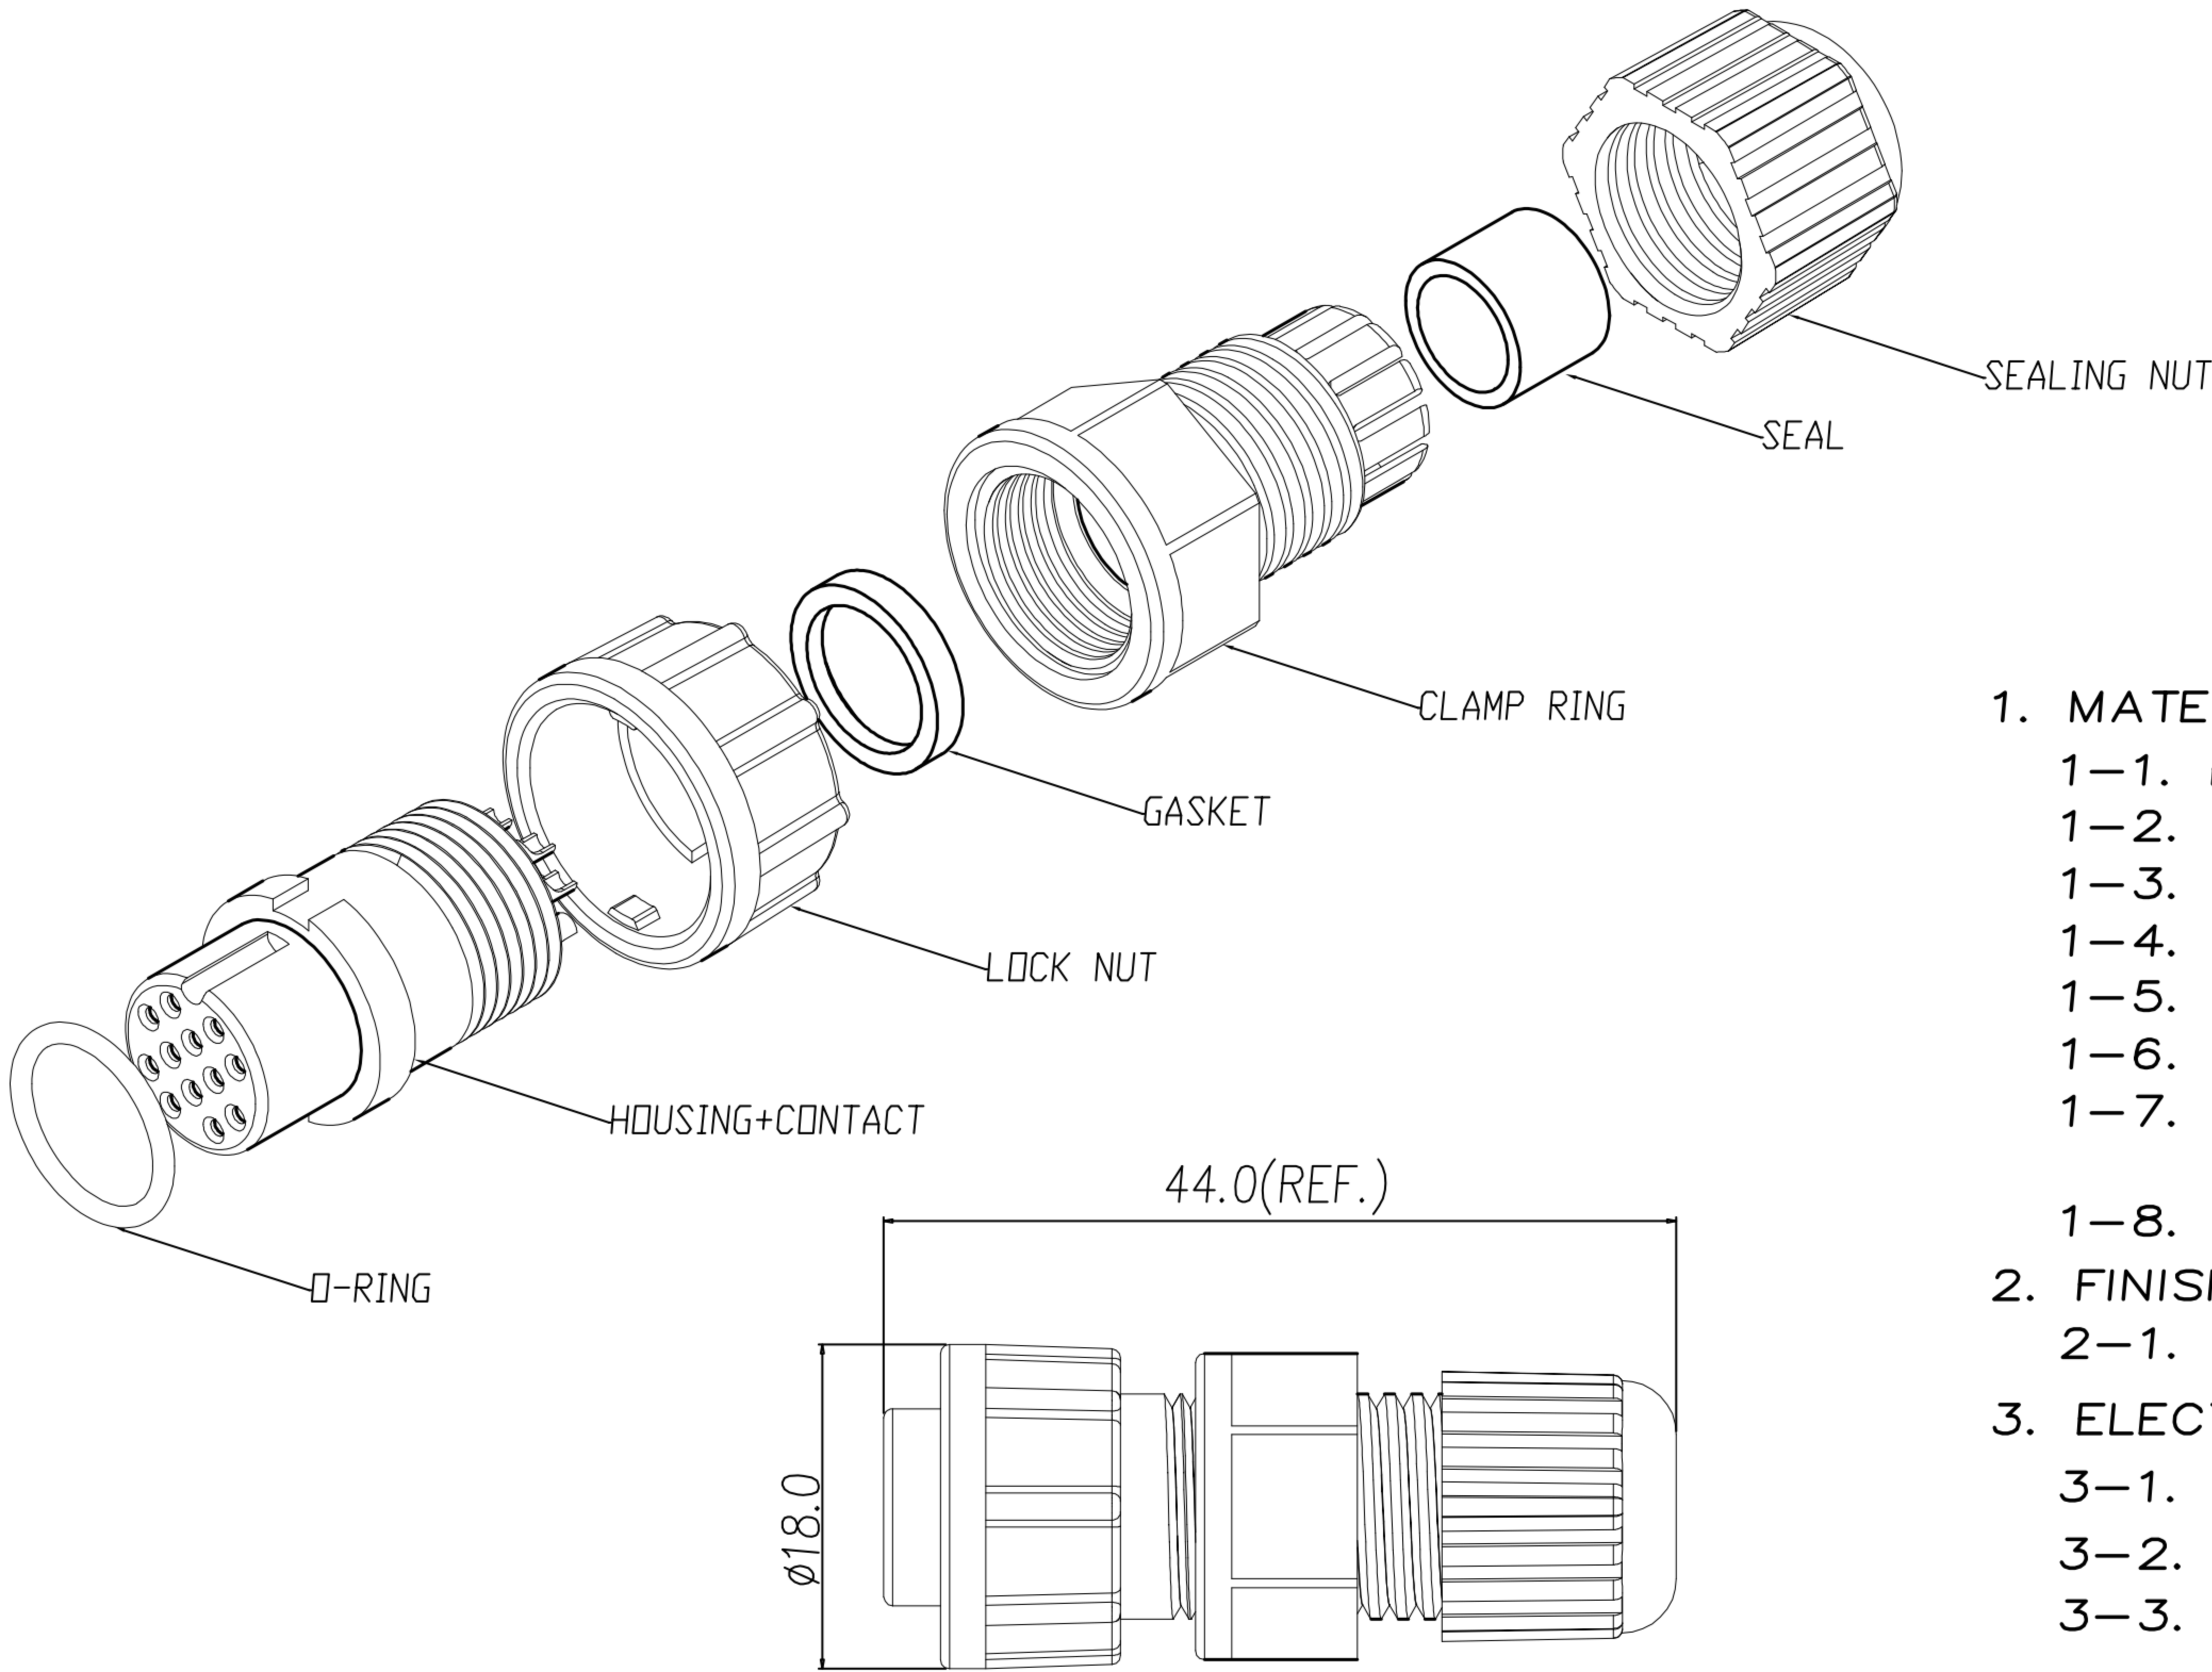


TABLE A	
10 PIN	12 PIN
WP-10F2-15-11	WP-12F2-24-11
PIN ASSIGNMENTS FRONT VIEW	

1. MATERIAL :
1-1. HOUSING : PA66
1-2. CONTACT : BRASS
1-3. O-RING : SILICONE
1-4. LOCK NUT : PA66
1-5. GASKET : SILICONE
1-6. CLAMP RING : PA66 B
1-7. SEAL : SILICONE
CABLE ODØ4.5mm ~6.5mm
1-8. SEALING NUT : PA66
2. FINISH :
2-1. CONTACT : GOLD FLASH PLATED.
3. ELECTRICAL SPECIFICATION :
3-1. Rated current : 2A
3-2. Rated voltage : 250V
3-3. Water proof : IP67
4. Environmental :
4-1. Operation Temperature : -40℃~105℃

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE			广东科斯达电子科技有限公司		TITLE	WP (F) (LOCK) B SIZE ASSEMBLY TYPE(2A)			SHEET
CHK'D	Ku Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.		PART NO.	SEE TABLE A	DWG NO.	QC8636	VERSION B