


TABLE A

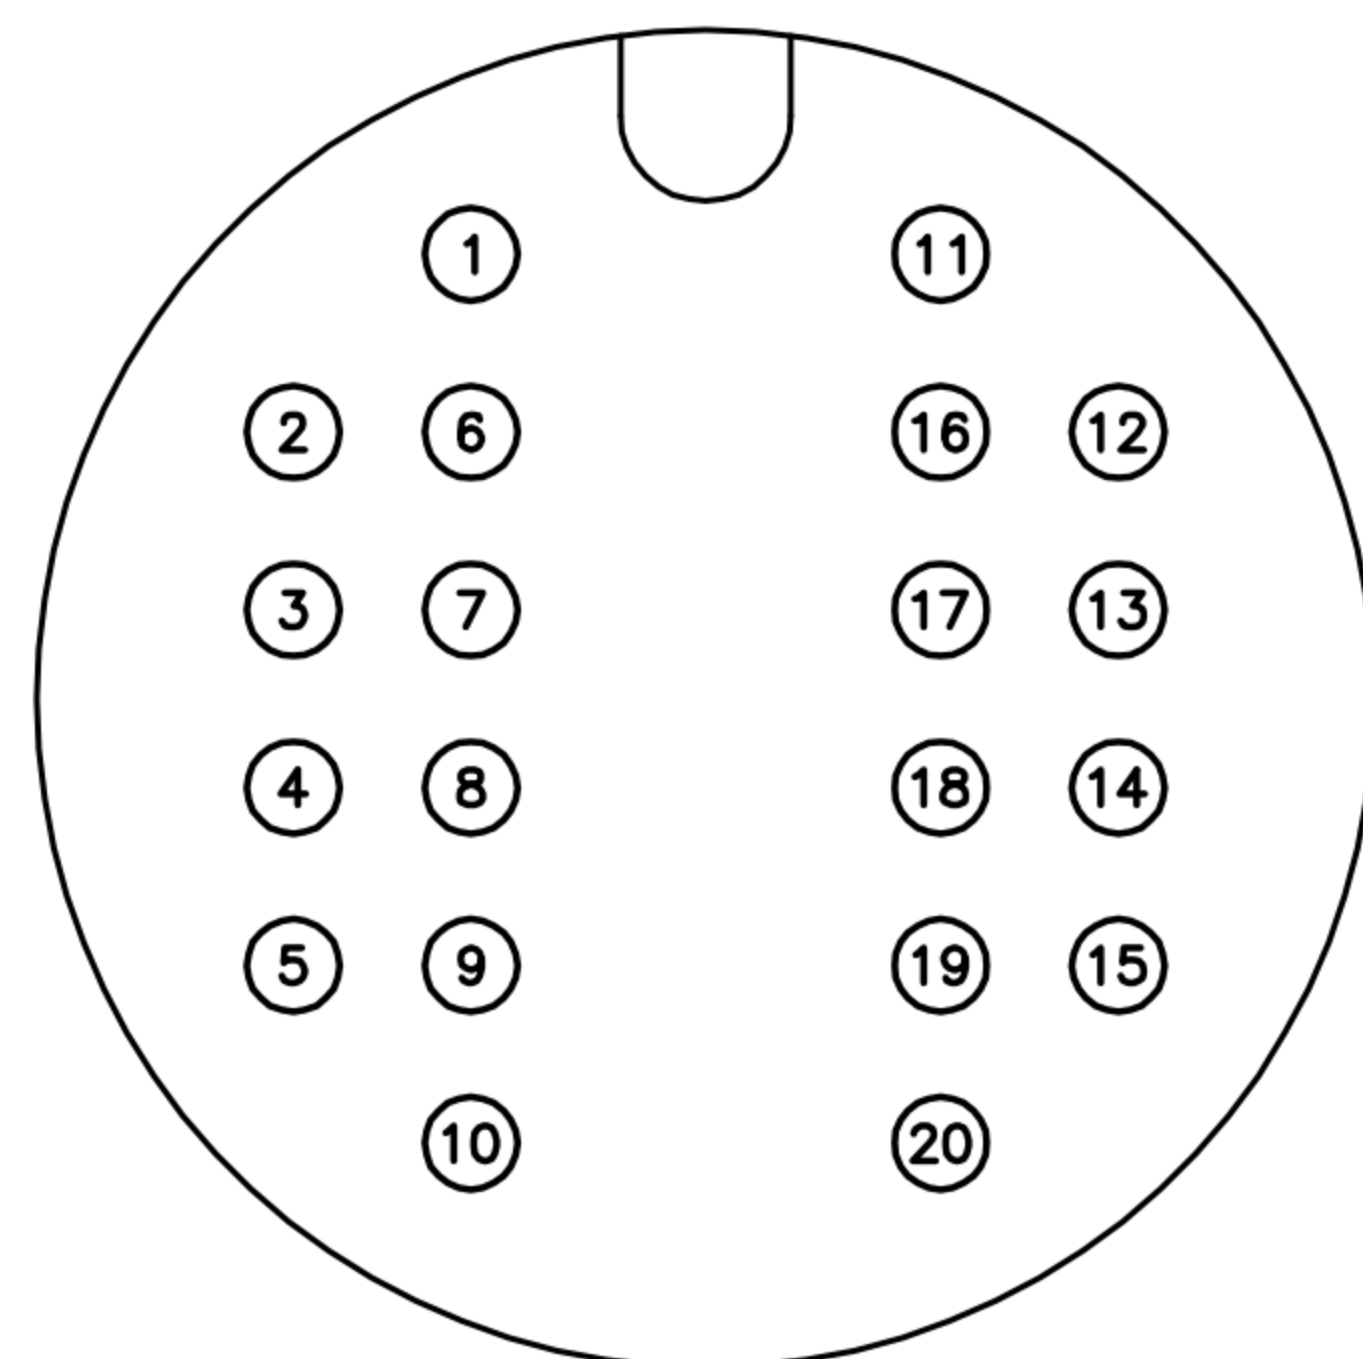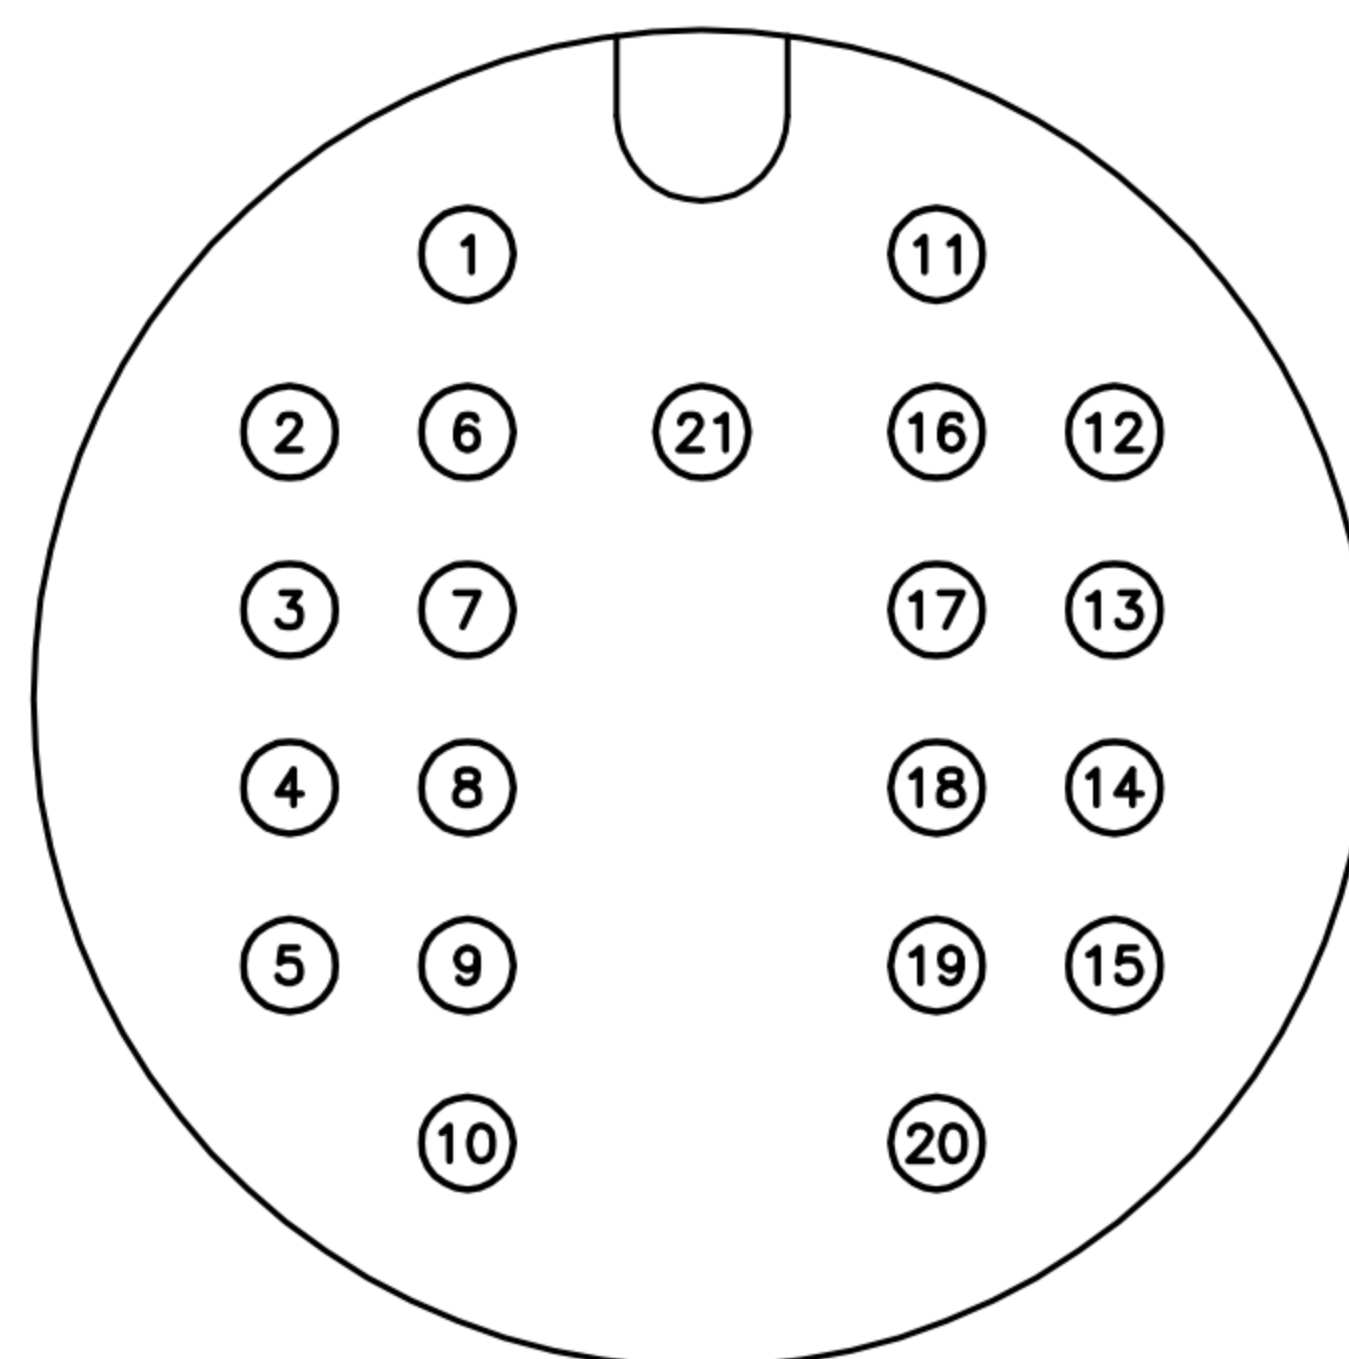


20P


WP-20M2-02-11

 $21P$

WP-21M2-02-11

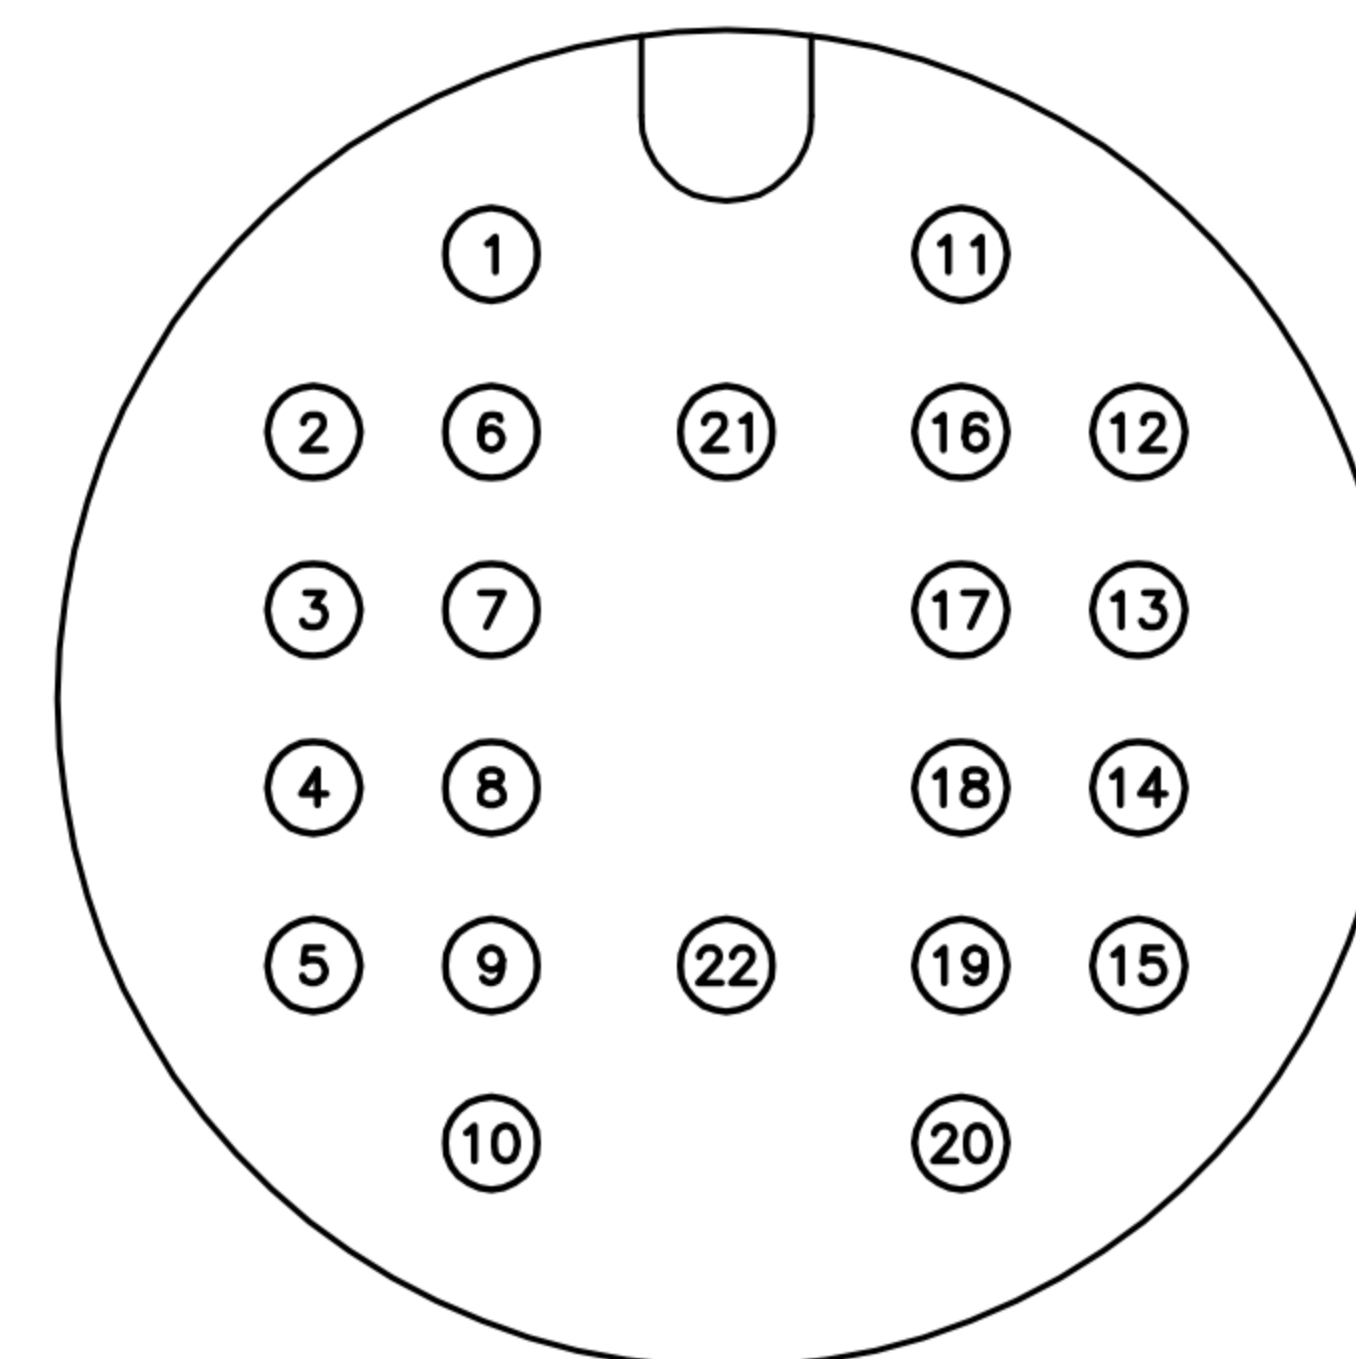
 $22P$

WP-22M2-02-11

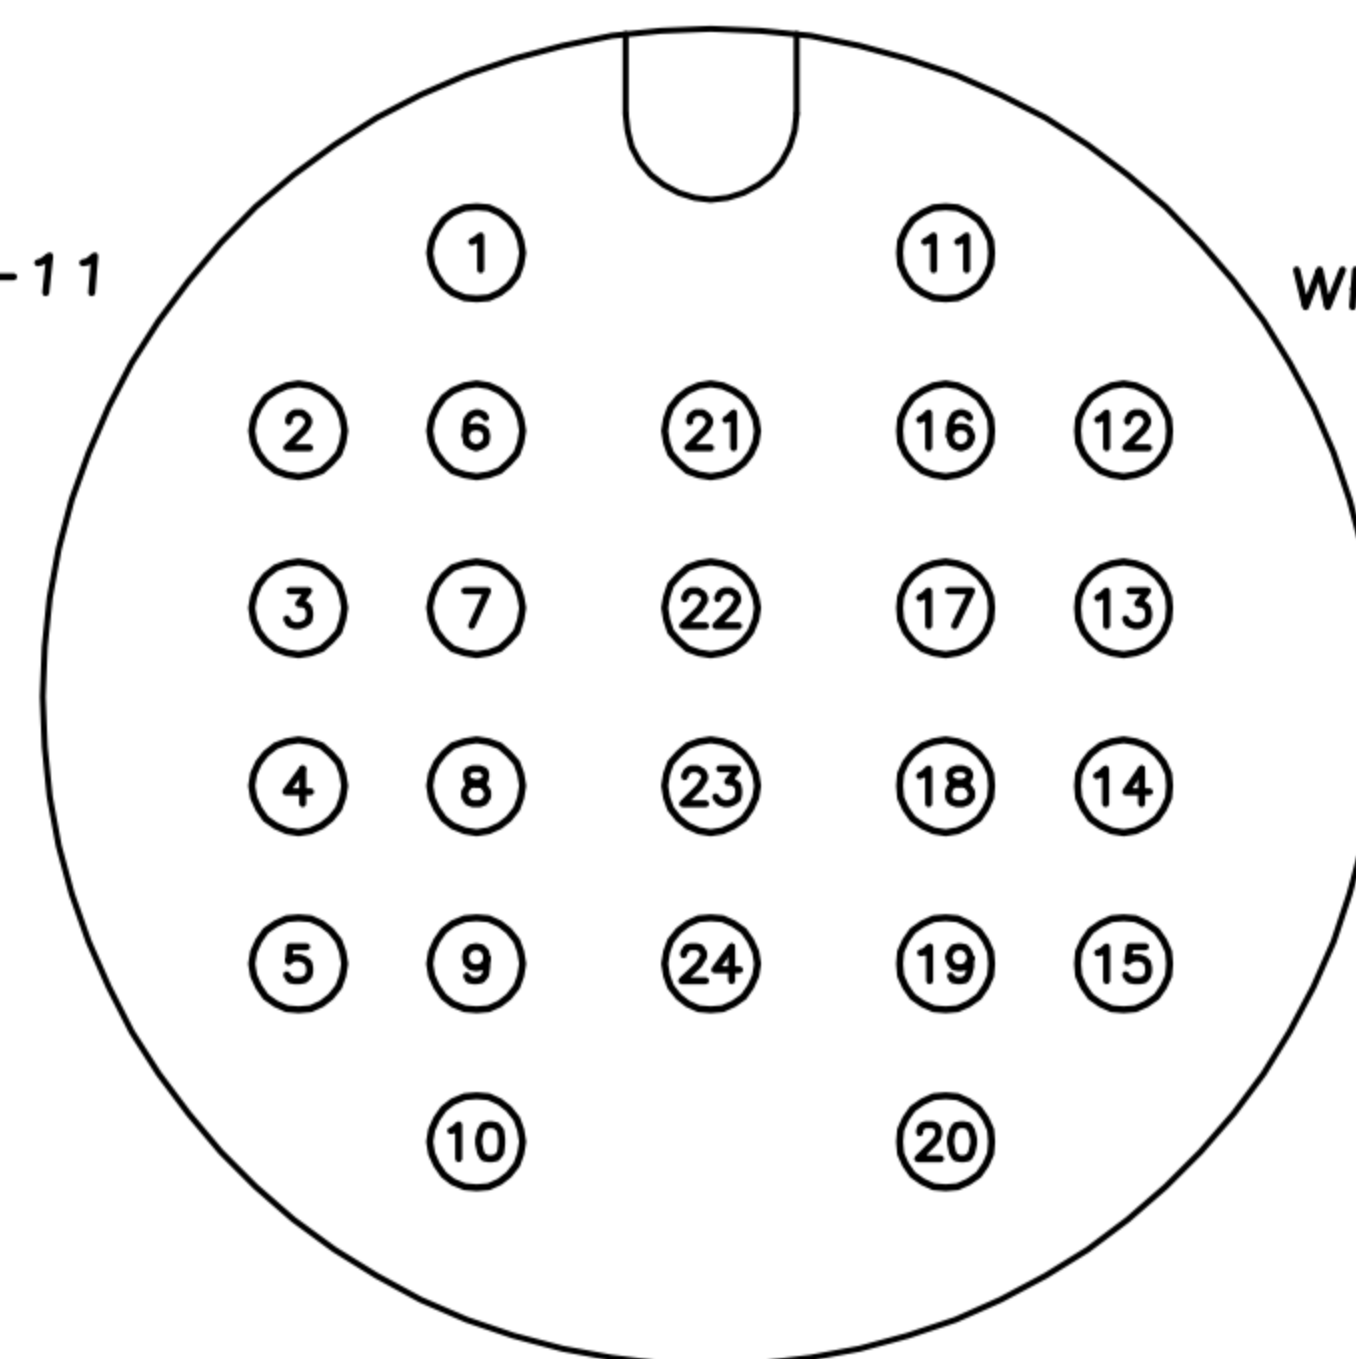

24P

WP-24M2-02-11

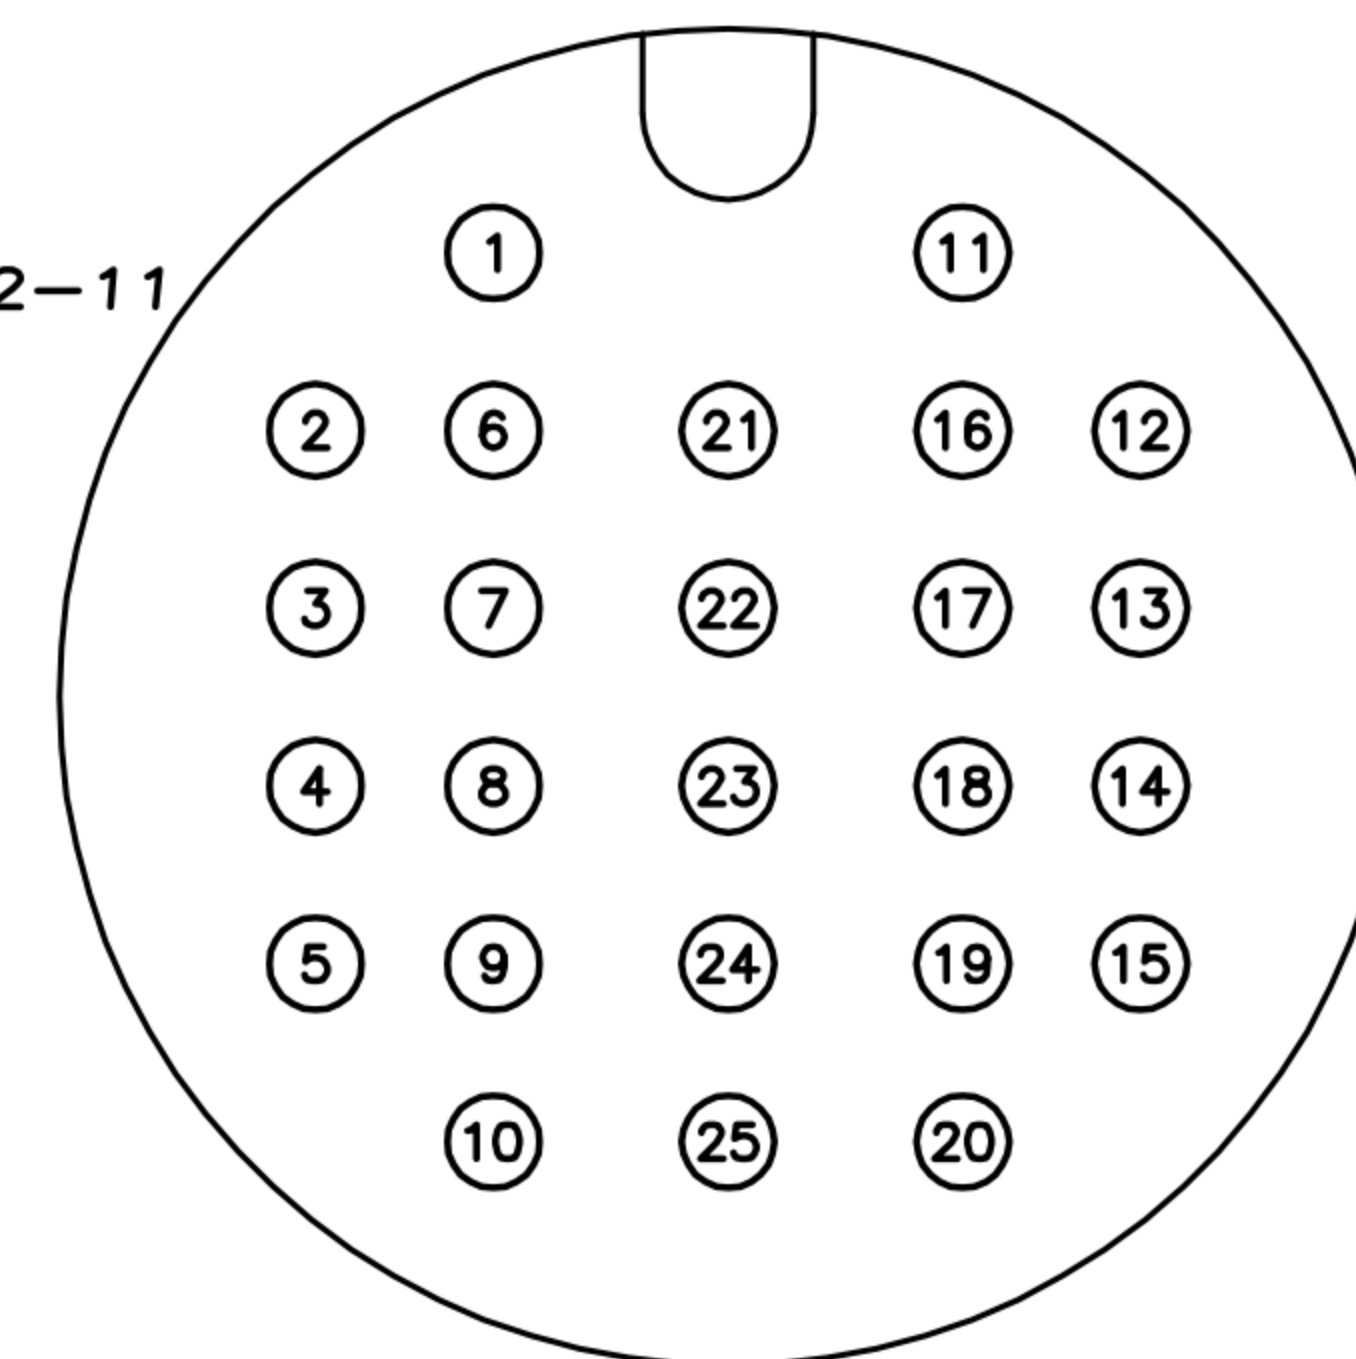

25P




WP-25M2-02-11

PIN CONFIGURATION




DRAWN	Emily Suen	APP'D	KU Chou	UNIT	mm	TOLERANCE .x±0.20 .xx±0.10 .xxx±0.05 .xxxx±0.03 ANGULA±1°    广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	WP D Size(M Conn. M PIN) Front Fastened(Screw Thread)-Circular			SHEET 2 2
CHK'D	KU Chou			SCALE	1:1				PART NO.	SEE TABLE A	DWG NO.

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	22/04/20"	
B				
C				

CUSTOMER DRAWING

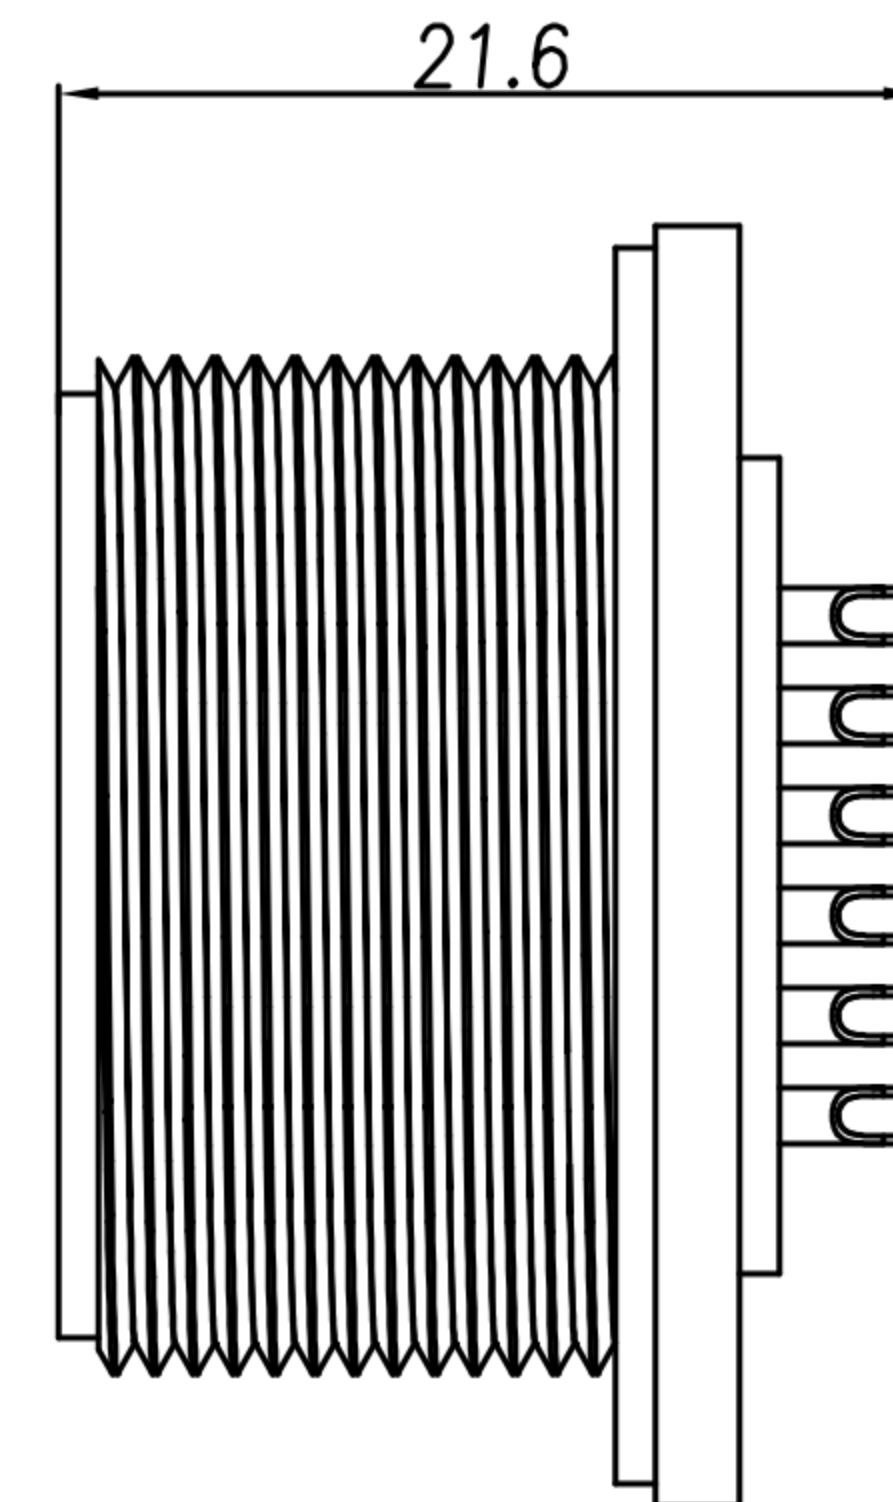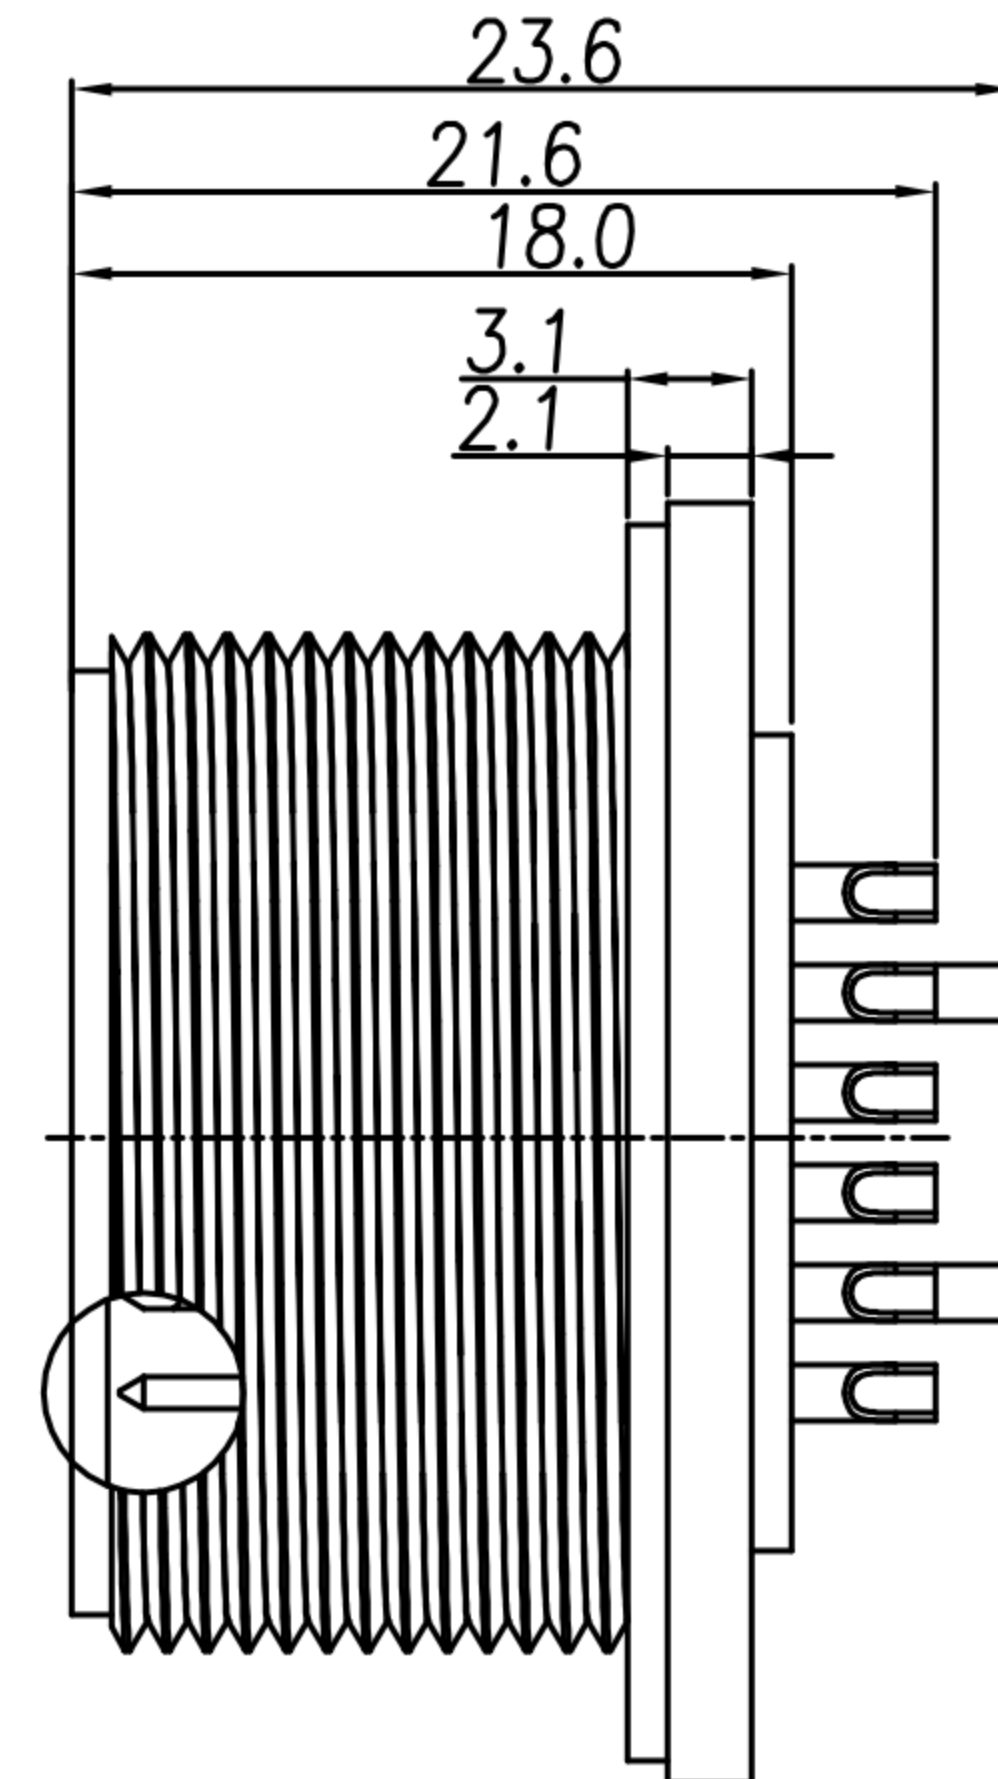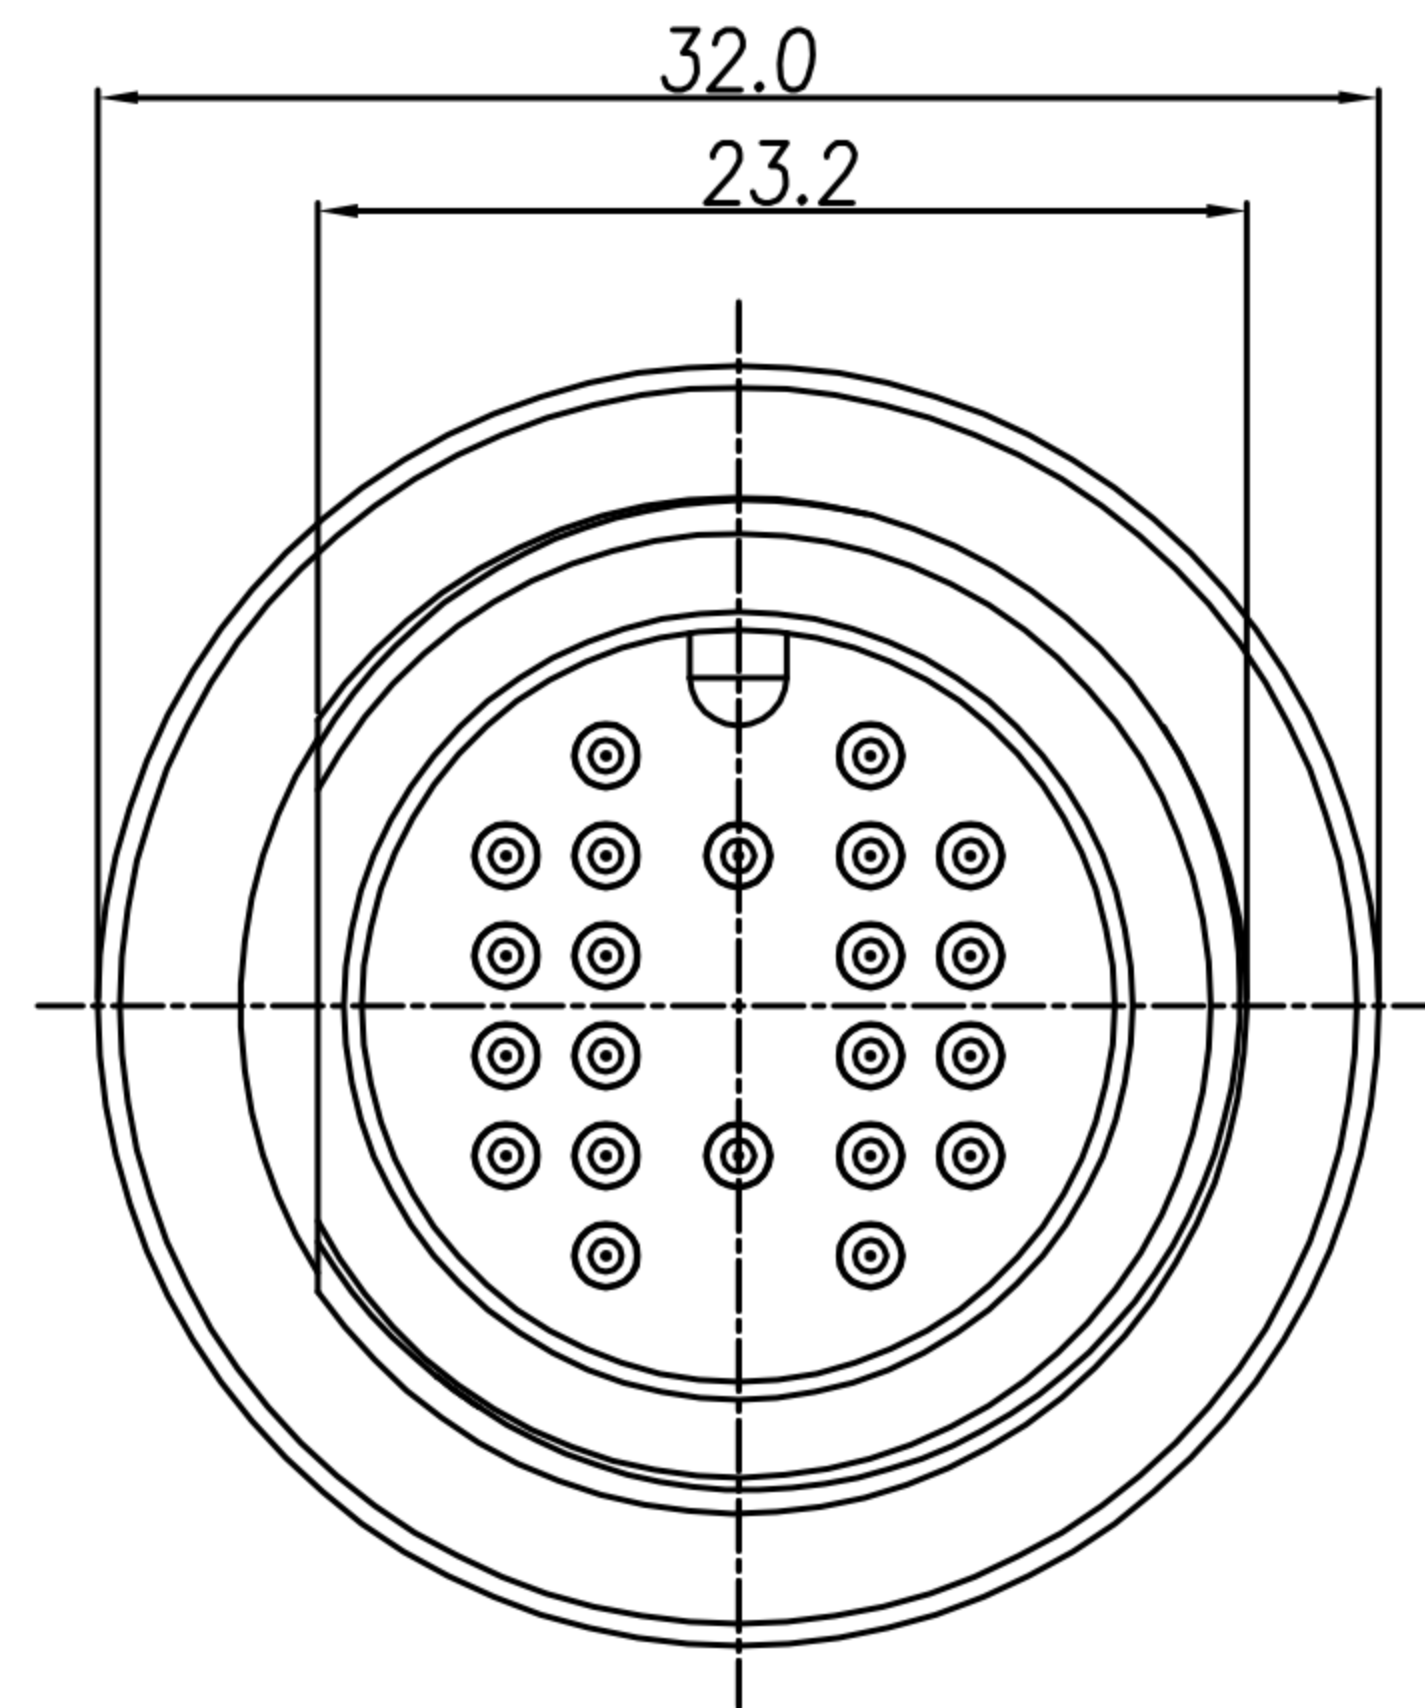

20 PIN ONLY

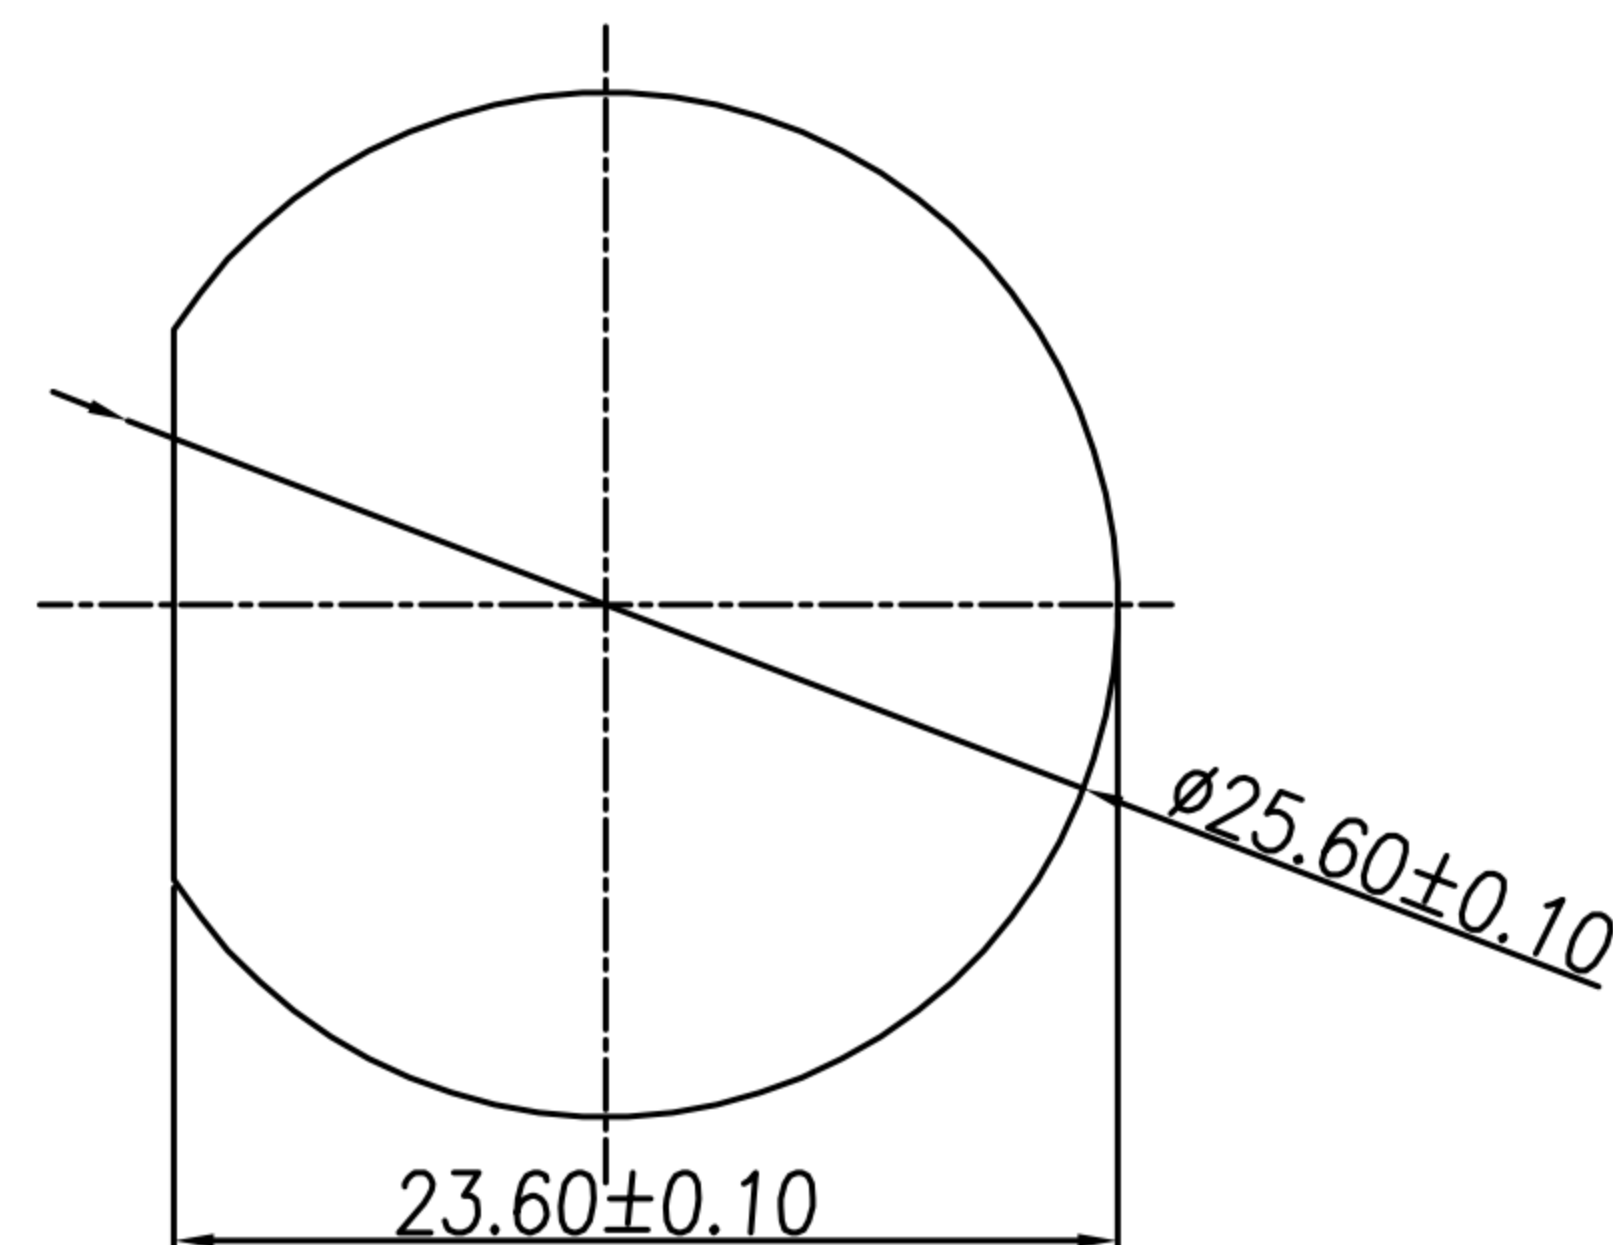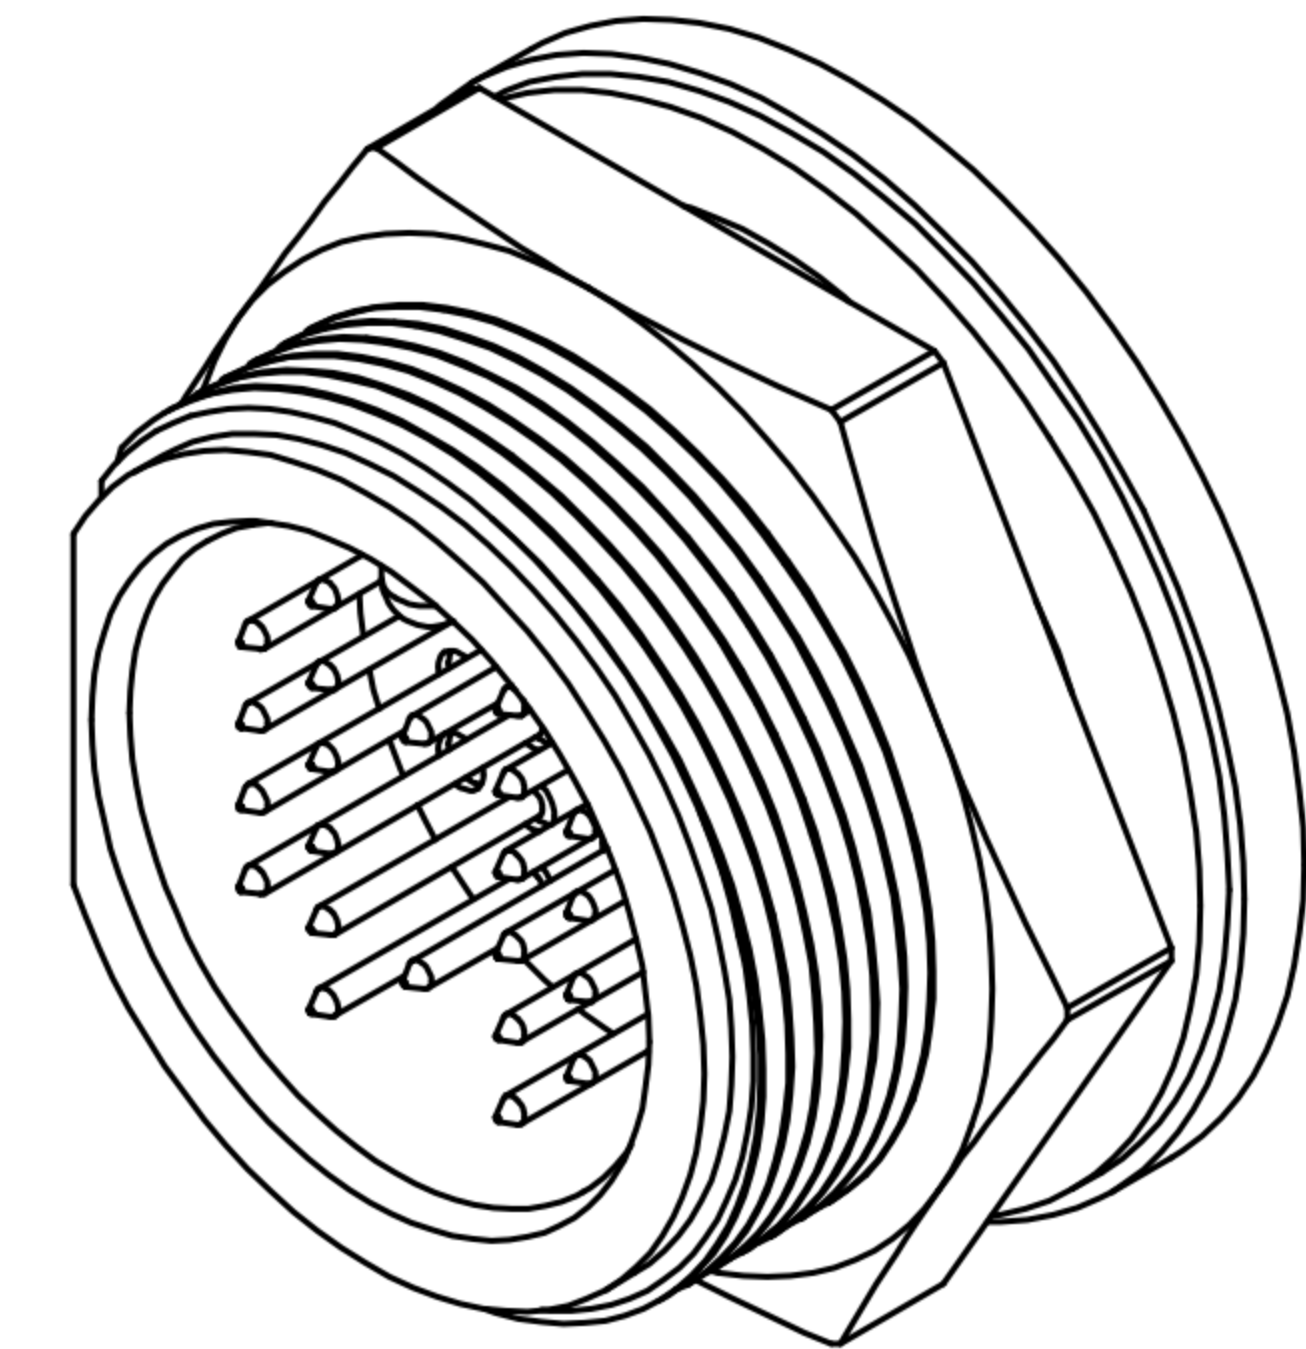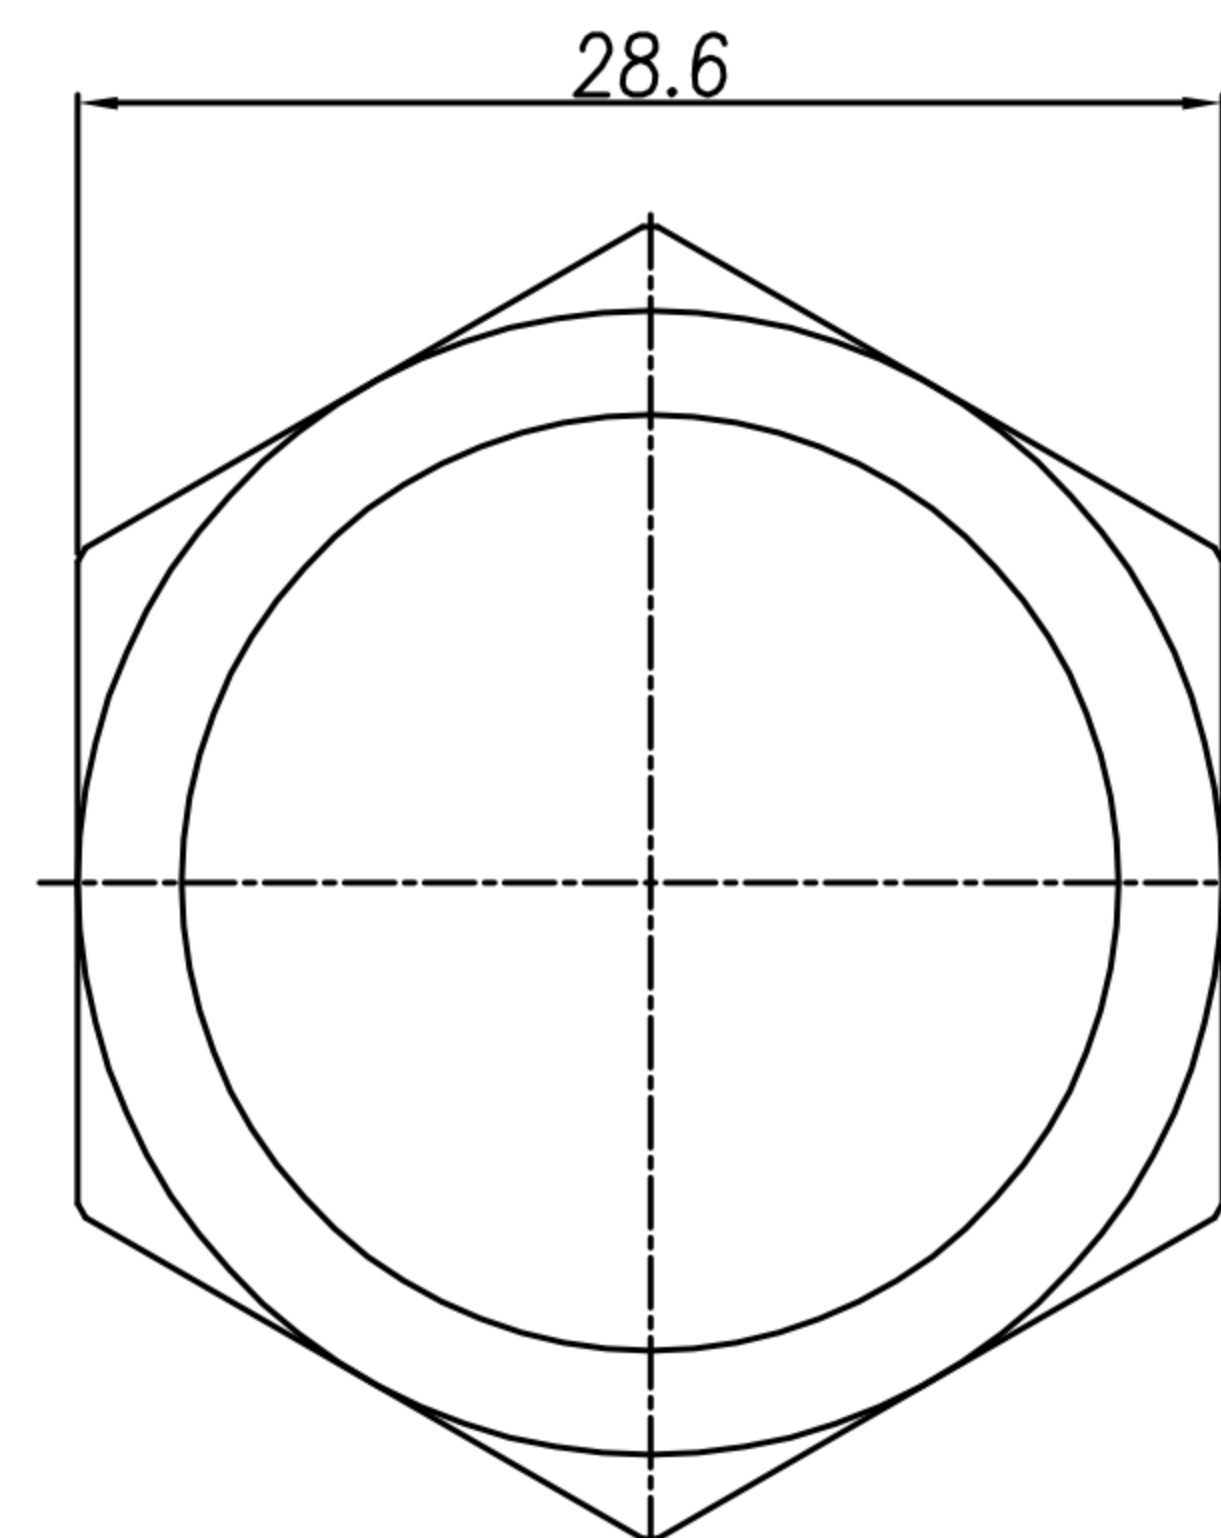RECOMMEND PANEL HOLE

Hex Nut



1. MATERIAL :
 - 1-1. HOUSING : PA66
 - 1-2. CONTACT : BRASS
 - 1-3. GASKET : SILICONE
 - 1-4. HEX NUT : PA66
2. FINISH :
 - 2-1. CONTACT : GOLD FLASH PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 2A
 - 3-2. Rated Voltage : 300V
4. Environmental :
 - 4-1. Operation Temperature : -40℃~105℃

DRAWN	Emily Suen	APP'D	KU Chou	UNIT	mm	TOLERANCE .x±0.20 .xx±0.10 .xxx±0.05 .xxxx±0.03 ANGULA±1°		广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	WP D Size(M Conn. M PIN) Front Fastened(Screw Thread)-Circular				SHEET 1 2
CHK'D	KU Chou			SCALE	1:1				PART NO.	SEE TABLE A	DWG NO.	QC9697	VERSION	A