



CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
F	CHANGE DIM & MATERIAL	Fido Weng	26/06/09'	ECN09103
G	MODIFY CONTACT MATERIAL & DIM.	Fido Weng	19/08/10'	ECN10078
H	變更電鍍規格	KU	30/10/17'	ECN-17011

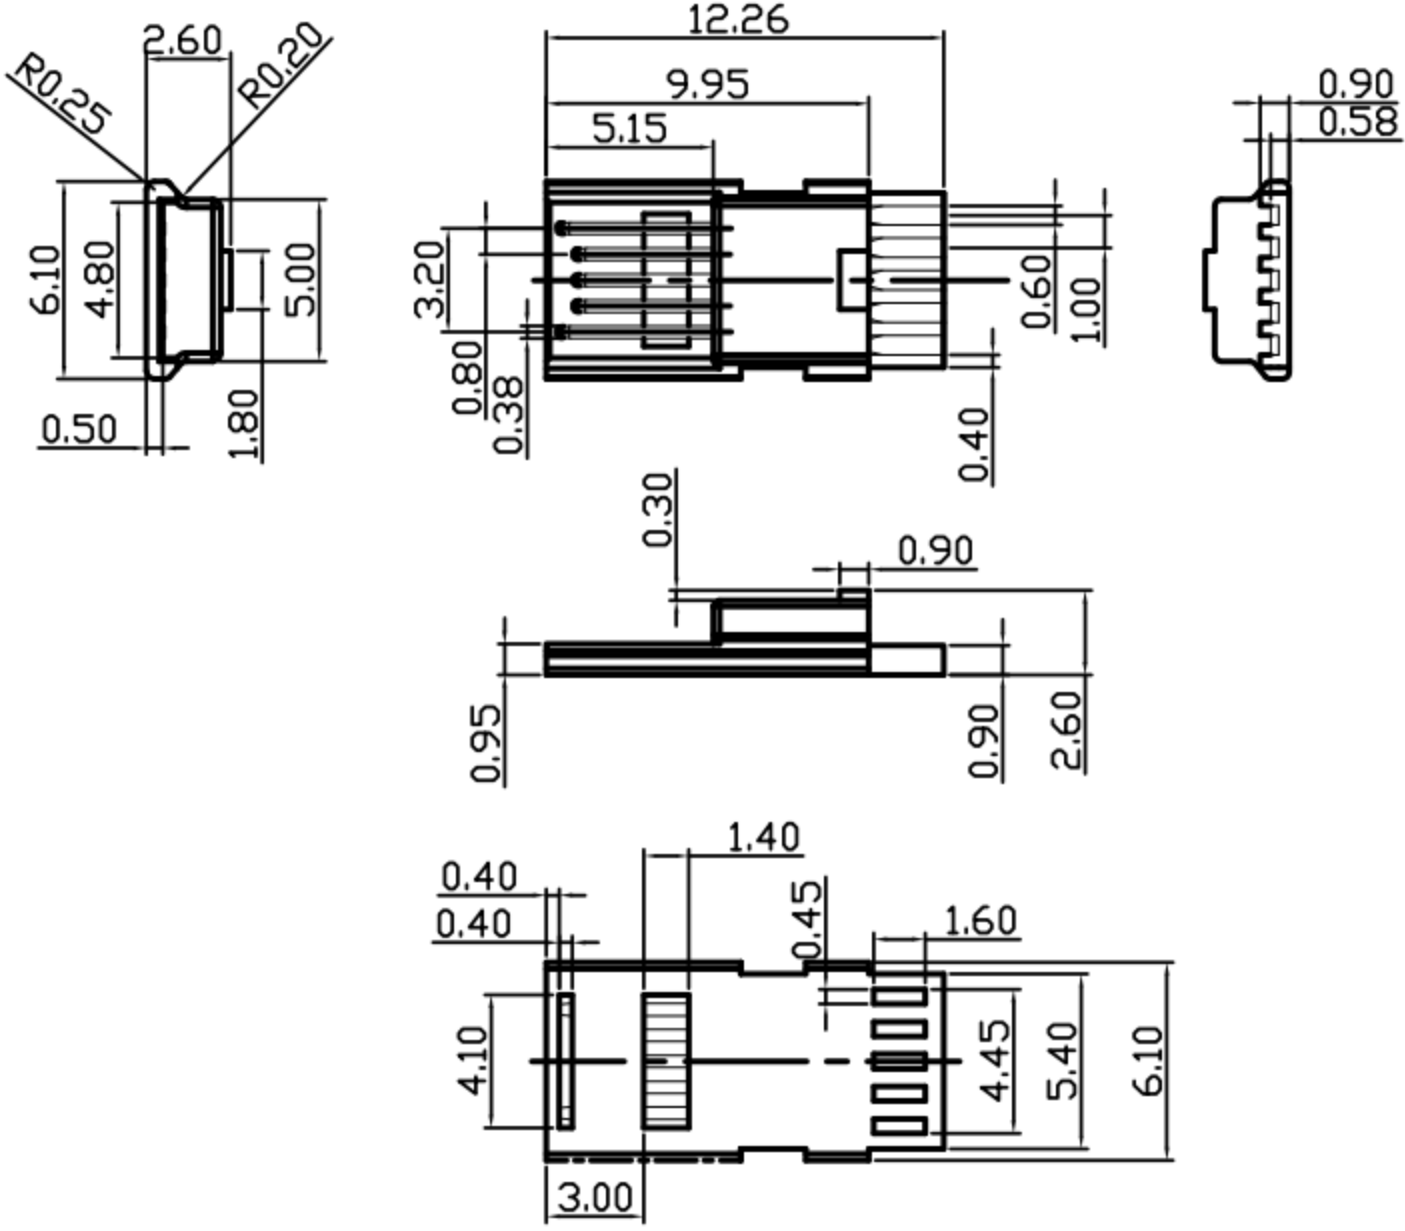


MiniUSB 5P(M) 膠芯+端子

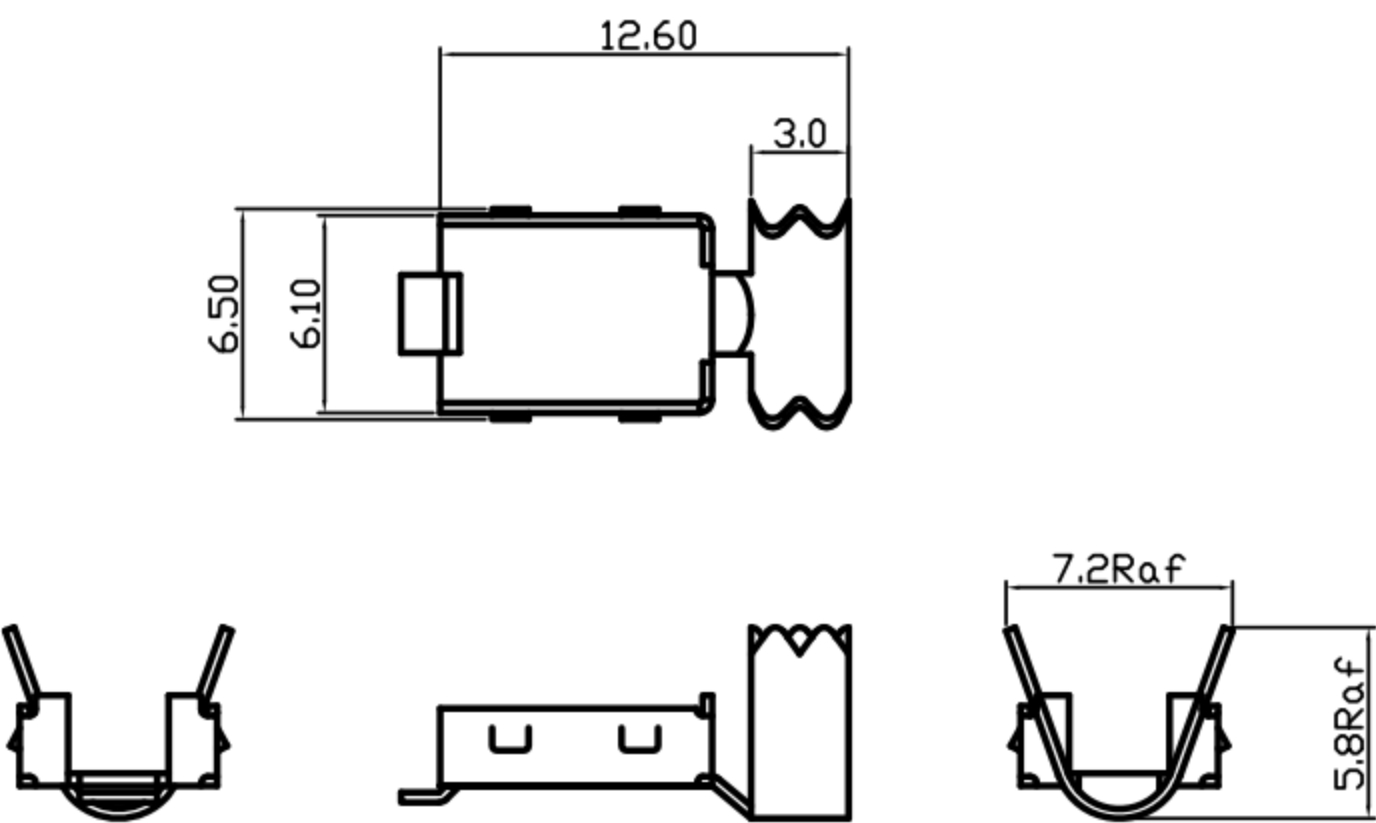


MiniUSB 5P(M) 成型上蓋

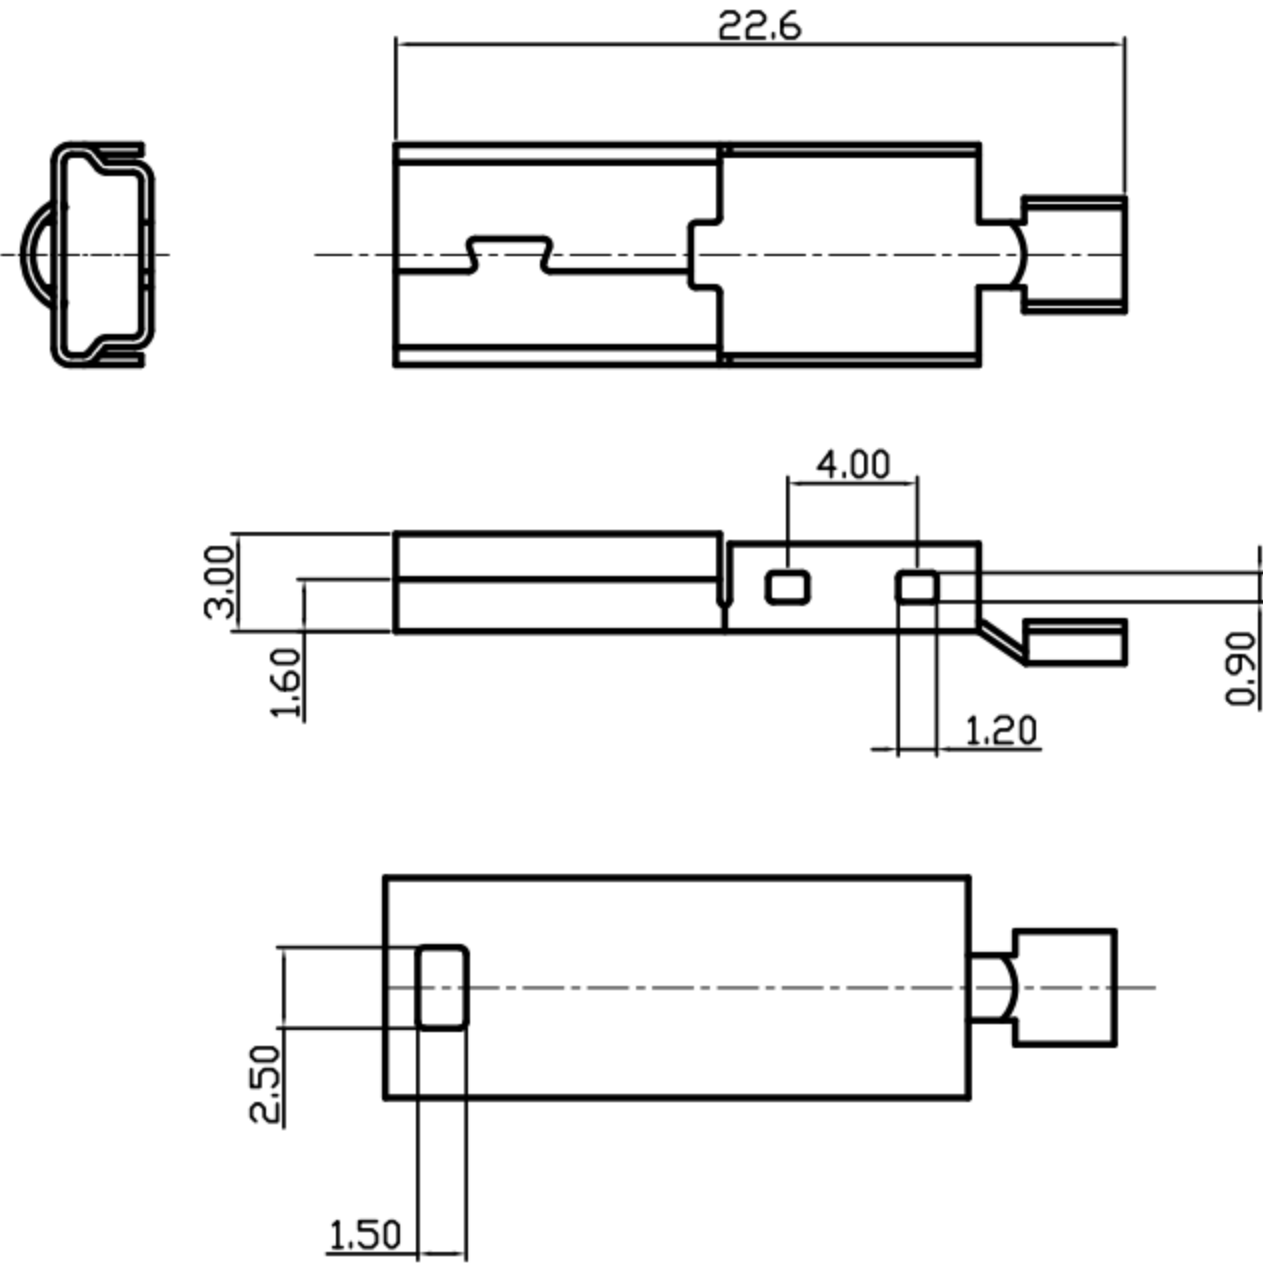



MiniUSB 5P(M) 成型下蓋

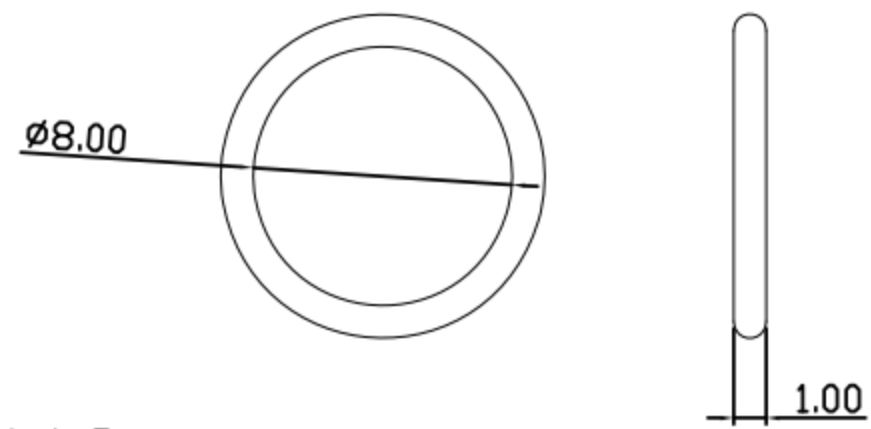

O-RING

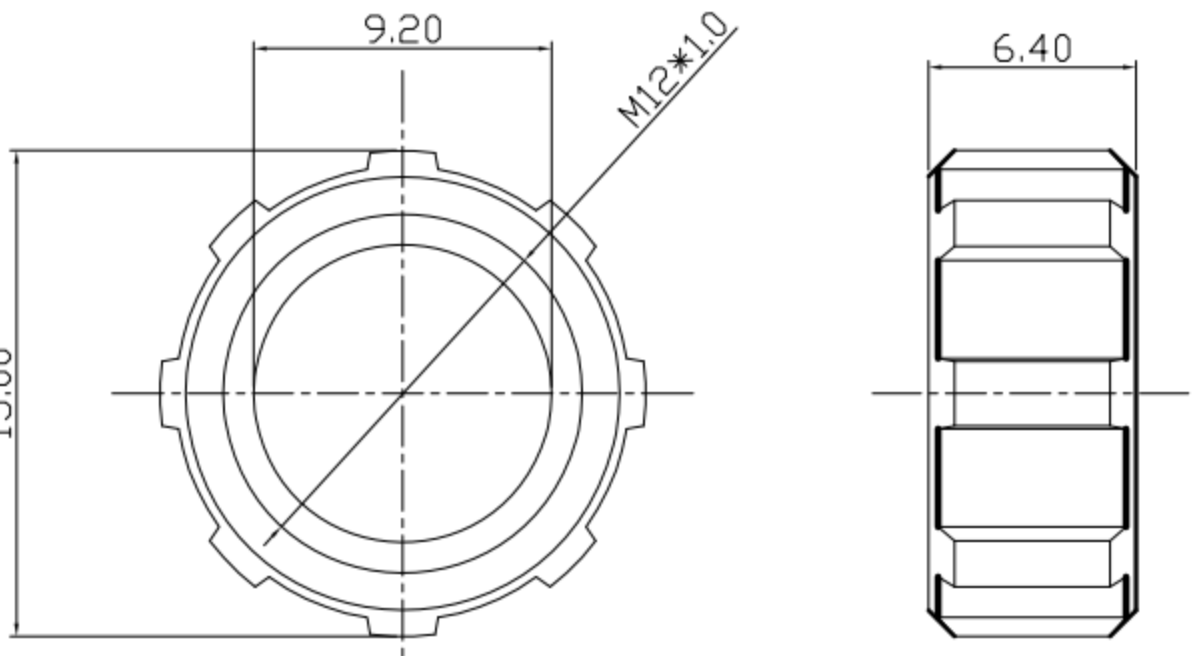

防水MiniUSB 螺母

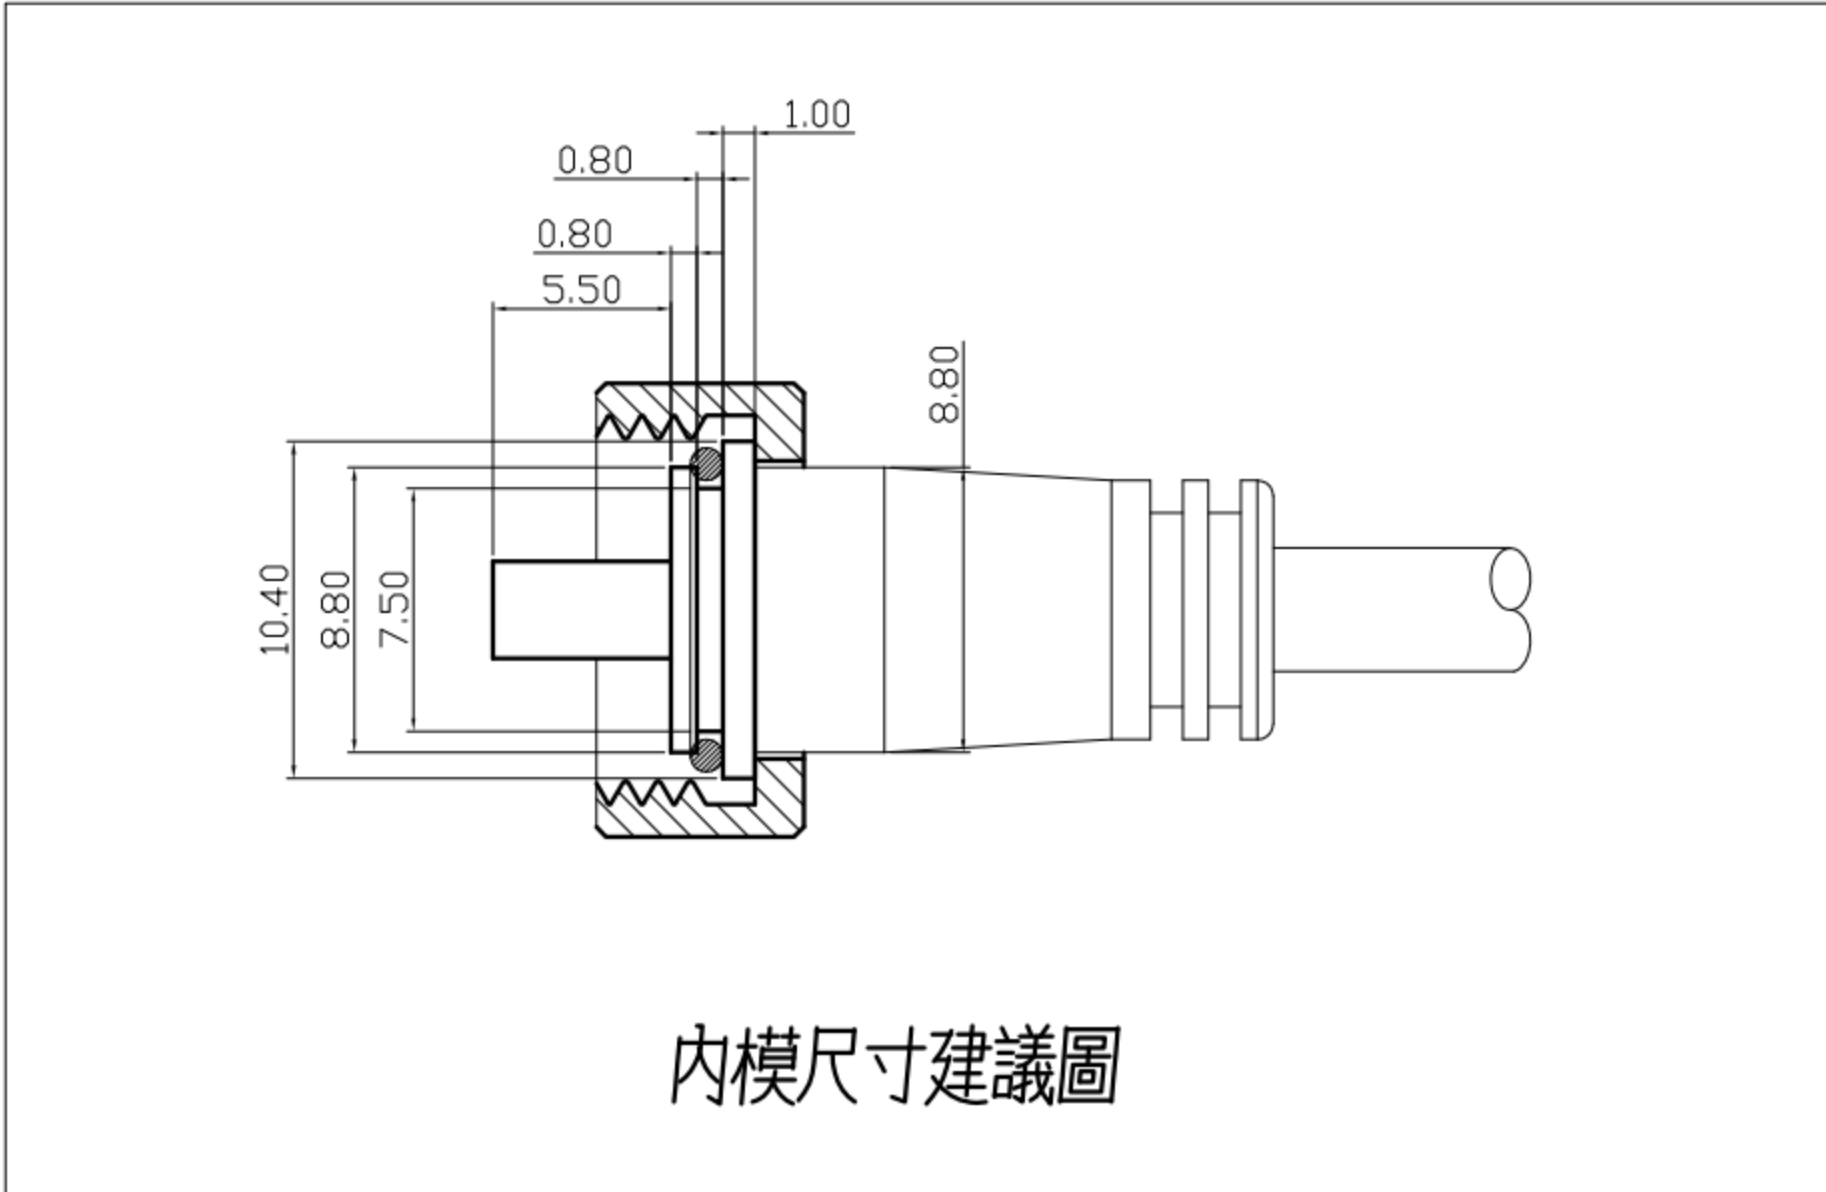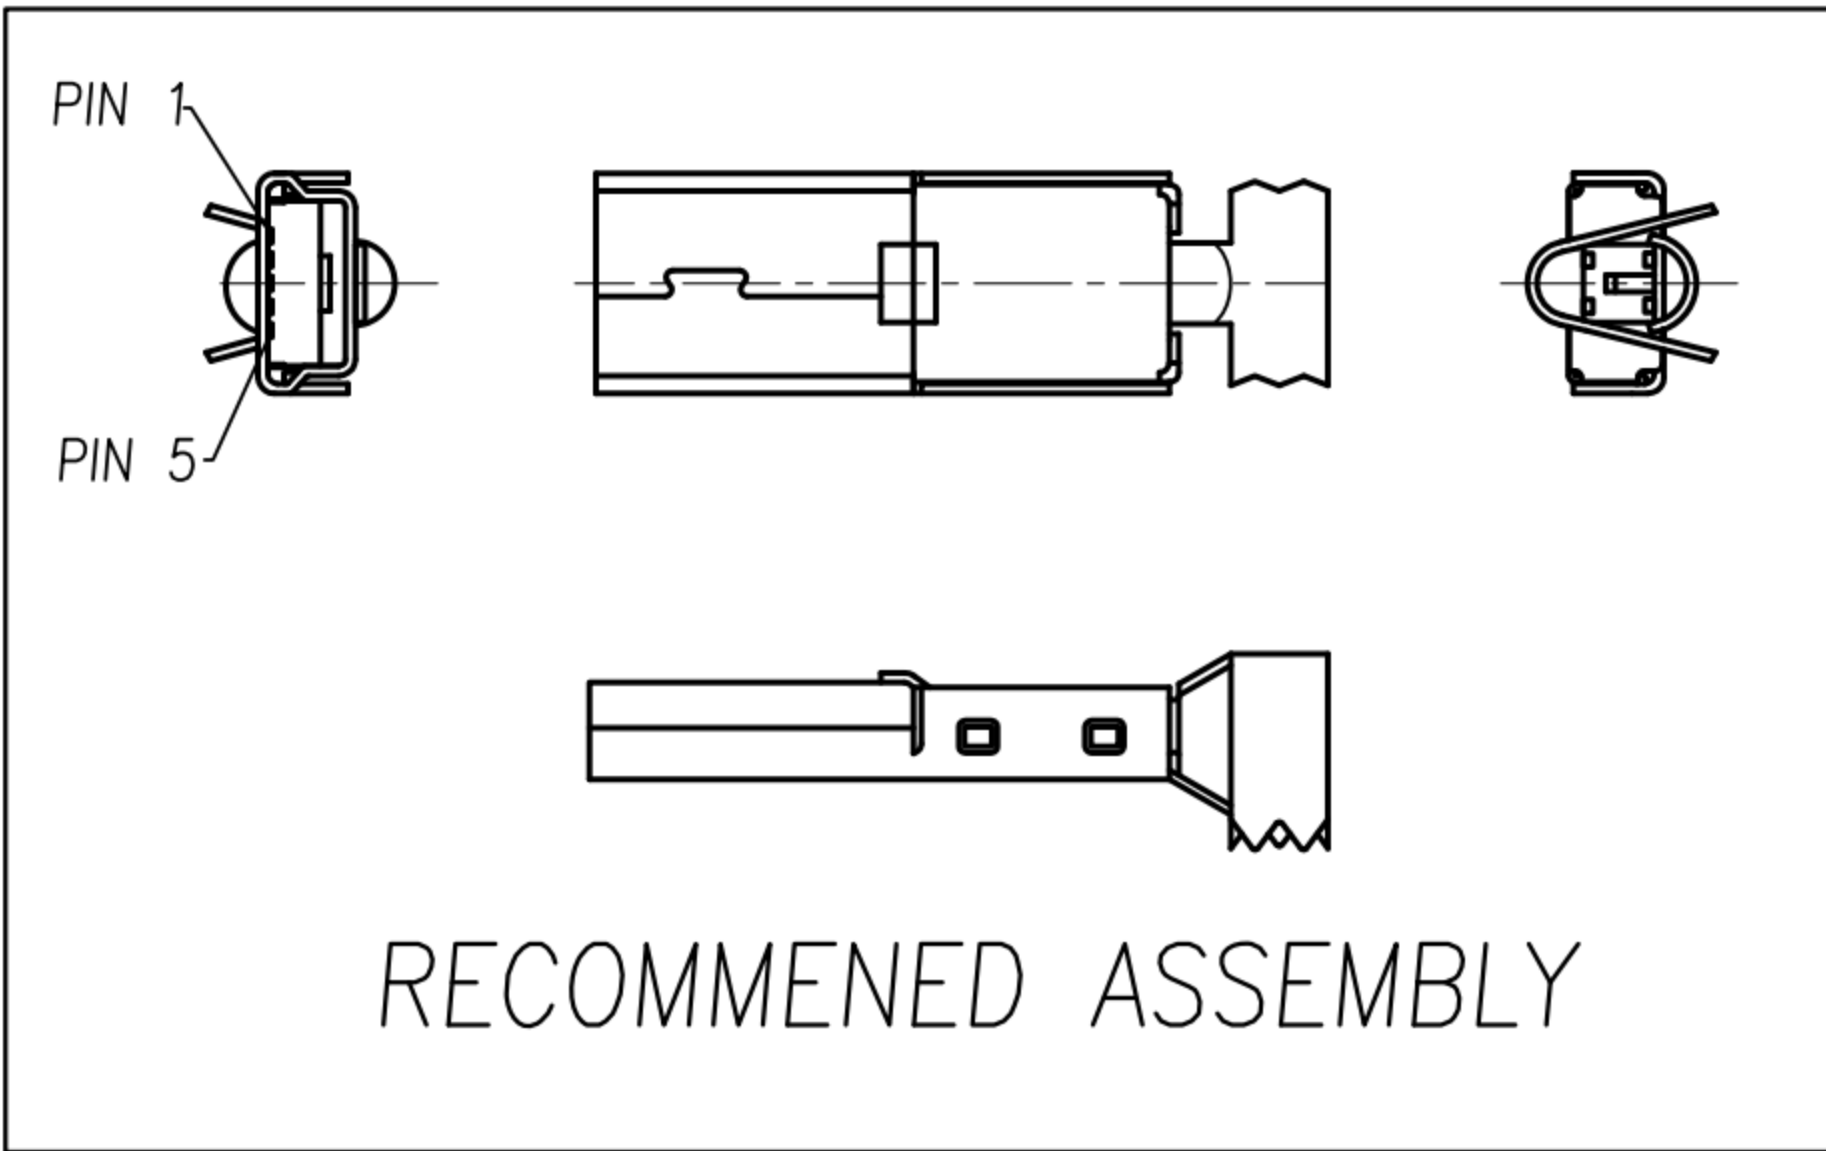

內模尺寸建議圖

1. MATERIAL :

 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. SHELL UP : SPCC
 - 1-4. SHELL DOWN : SPCC
 - 1-5. NUT : PBT UL94V-0
 - 1-6. O-RING : NBR (1*8) ; COLOR : BLACK.

2. FINISH :

 - 2-1. CONTACT AREA : GOLD FLASH
 - SOLDER AREA : BRIGHT TIN
- 2-2. SHELL UP : NICKEL

2-3. SHELL DOWN : NICKEL

3. ELECTRICAL SPECIFICATION :

 - 3-1. Rated current : 1A
 - 3-2. Rated voltage : 30V
 - 3-3. Water proof : IPX7

4. Environmental :

 - 4-1. Operation Temperature : -20℃~85℃