
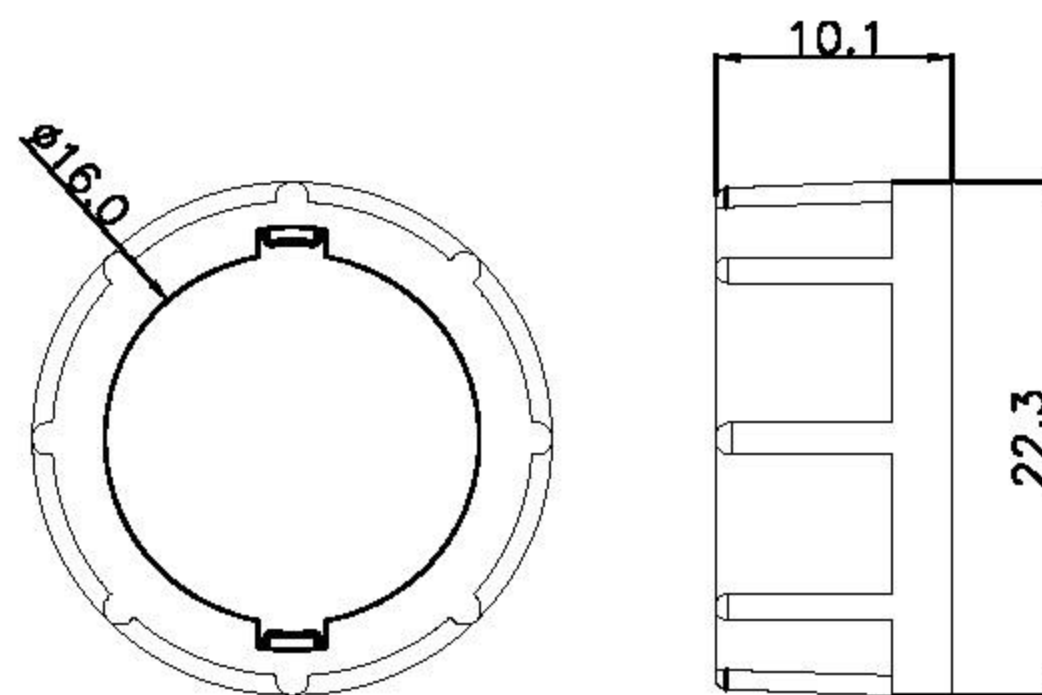
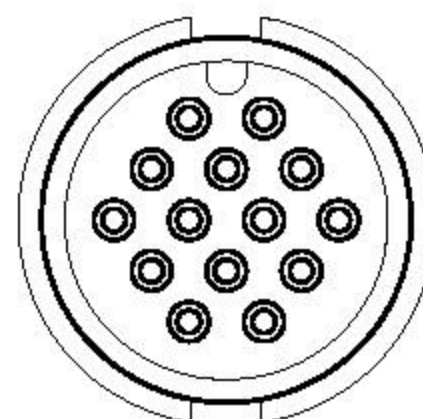


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NCL
A	RELEASE	Ku Chou	12/04/18	
B				
C				

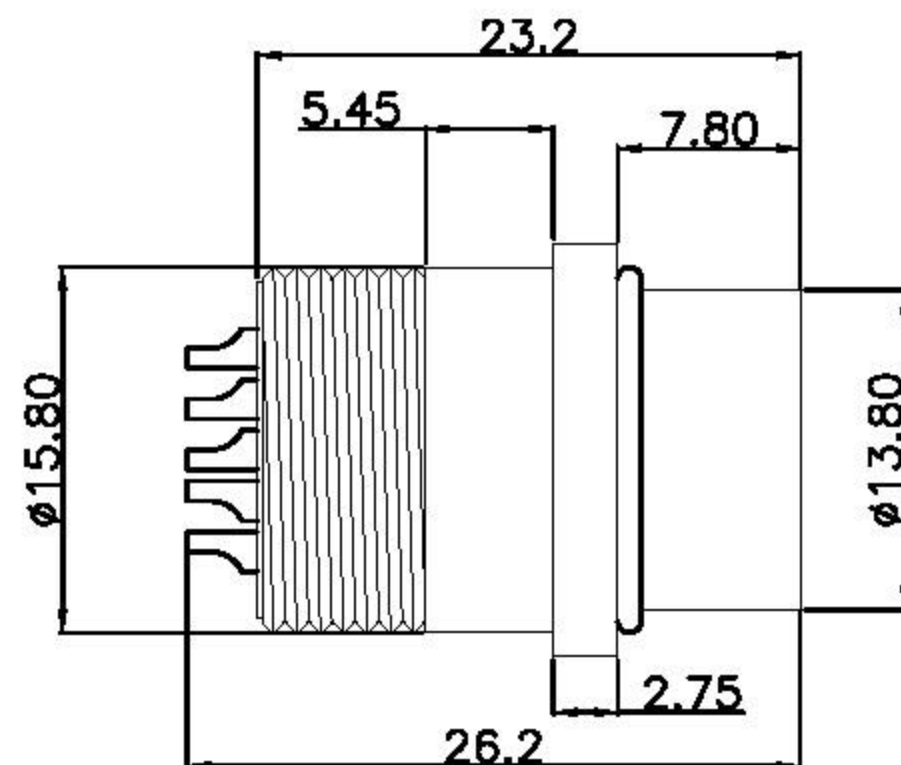

Hex Nut

- MATERIAL :**
 - 1-1. HOUSING : PA66
 - 1-2. CONTACT : BRASS
 - 1-3. O-RING : SILICONE
 - 1-4. HEX NUT : PA66
- FINISH :**
 - 2-1. CONTACT : GOLD FLASH PLATED.
- ELECTRICAL SPECIFICATION :**
 - 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 250V
 - 3-3. Water proof : IP67
- Environmental :**
 - 4-1. Operation Temperature : -20℃~80℃

TABLE A

07 PIN WP-07F1-01-11	08 PIN WP-08F1-01-11
09 PIN WP-09F1-01-11	10 PIN WP-10F1-02-11
12 PIN WP-12F1-01-11	14 PIN WP-14F1-01-11

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE		NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	WP C Size(F) Molded with Cabl(Lock Bayonet)			SHEET
CHK'D	Ku Chou			SCALE	1:1	±0.20 ±0.10 ±0.05 ±0.03 ±1°			PART NO.	SEE TABLE A	DWG NCL	QC8258	VERSION A