




SECTION A-A






SECTION A-A




B

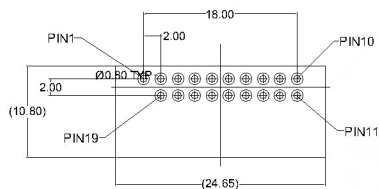


RECOMMENDED PCB LAYOUT  
PCB THICKNESS IS 1.60mm  
DEFAULT TOLERANCE ±0.05



SECTION A-A(1:1)



A

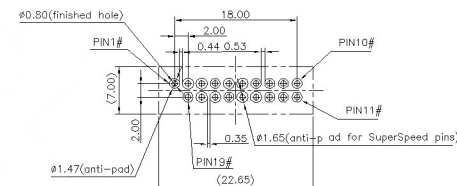


RECOMMENDED PCB LAYOUT  
PCB THICKNESS IS 1.60mm  
DEFAULT TOLERANCE ±0.05

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 1.5AMP;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -25°C ~ +75°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



REVISIONS					DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE:		
ΔX							ANGULAR	±5°						
ΔX							L ≤ 4	±0.2	DWN	DATE	VIEW:	PART NO.:		
ΔX							4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm	DWG NO.:		
MARK	DESCRIPTION						16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	A37-1X01-X11-X		
	www.bodongkaiguan.net						L > 63	±0.5				WEIGHT	SHEET	REVISION
												1.0g	1/1	A0

Kosod Technology Co., Ltd.