


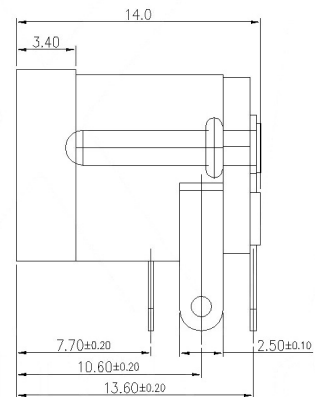


PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING:
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3~3.0 KGF
 - WITHDRAWAL FORCE : 0.3~3.0 KGF
 - LIFE TEST: 5,000 CYCLES MIN.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - REPRESENT CRITICAL DIMENSIONS.

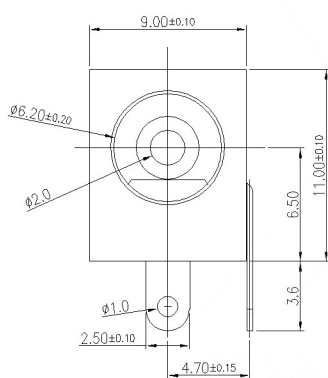

MATING PLUG
Jack Insertion Depth: 9.0 mm

SCHEMATIC	
Model	DC-005
Center Pin	2.0
	2.5
	3.0

	MATERIAL	PLATING
center pin	Brass	silver
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver
plastic	Pbt	

						DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK
△X						DWN		DATE		VIEW:	PART NO.:
△X						CHKD		DATE		UNIT: mm	DWG NO.:
△X						APPD		DATE		SIZE: A4	DC-005-5A-2.0
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	KOSOD TECHNOLOGY CO., LTD			WEIGHT	SHEET	REVISION
www.bodongkaiguan.net www.ksdkg.com									1.0g	1/1	A0