

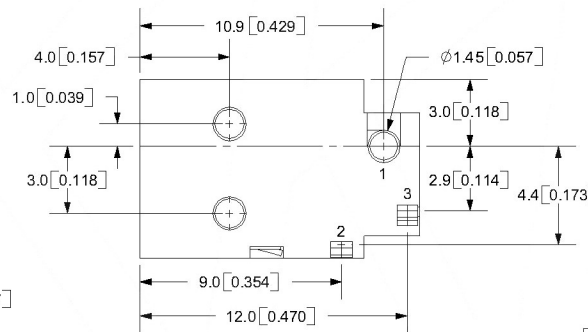


SPECIFICATIONS:
 RATING: 12V DC @ 1A
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN; 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -20 ° ~ +85°C

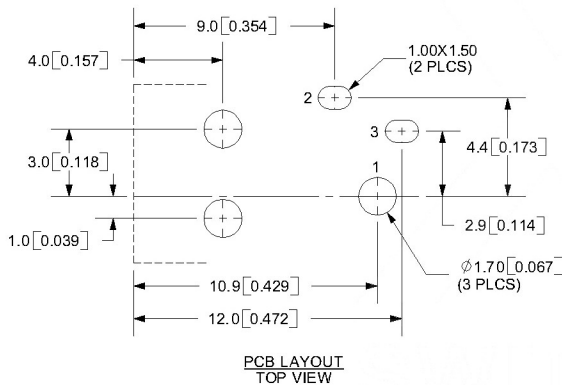

	MATERIAL	PLATING
center pin	Brass	tin
terminal 1	Brass	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
plastic	Pbt	

					ANGLAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE:
△x					X.X	±0.2mm	DWN	DATE	VIEW:	DC POWER JACK
△x					X.XX	±0.1mm	CHKD	DATE	UNIT: mm	PART NO.:
△x					X.XXX	±0.05mm	APPD	DATE	SIZE: A4	DWG NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		KOSOD TECHNOLOGY CO., LTD			DC-023
REVISIONS						WEIGHT	SHEET	REVISION		
www.bodongkaiguan.net www.ksdkg.com						1.0g	1/1	A0		