



5~678&*9"	
○ 1#	9: <=
○ 3# 56)	*\$* 7>89: &%
○ 2# 5	>9: ?; @-

SPECIFICATION


1. Rating : DC 20V 7A;
2. Contact resistance: ≤0.03 Ω;
3. Insulation resistance: ≥100M Ω (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-30N;
6. life test: 5,000 cycles.
7. PLUG 插入后上下左右四个方向无瞬断现象。



SECTION A-A



SECTION B-B

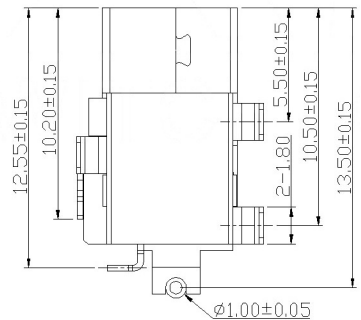

	MATERIAL	PLATING
center pin	Brass	tin
coat	Sus	
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pa9t	

						ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK	
△X						X.X	±0.2mm	DWN		DATE		VIEW:	PART NO.:	
△X						X.XX	±0.1mm	CHKD		DATE		UNIT: mm	DWG NO.:	
△X						X.XXX	±0.05mm	APPD		DATE		SIZE: A4	DC-C024E-7A-1.65	
MARK	DESCRIPTION	DATE	REVISED	APPROVED		UNSPECIFIED TOLERANCES		KOSOD TECHNOLOGY CO., LTD				WEIGHT	SHEET	REVISION
	www.bodongkaiguan.net											1.0g	1/1	A0