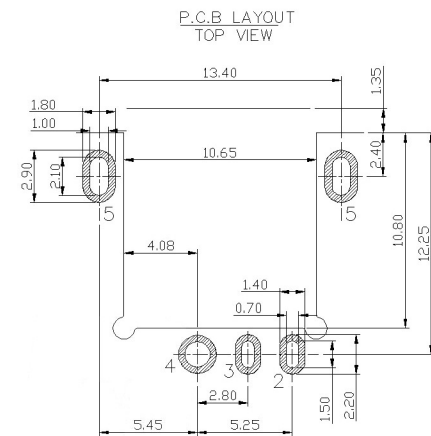
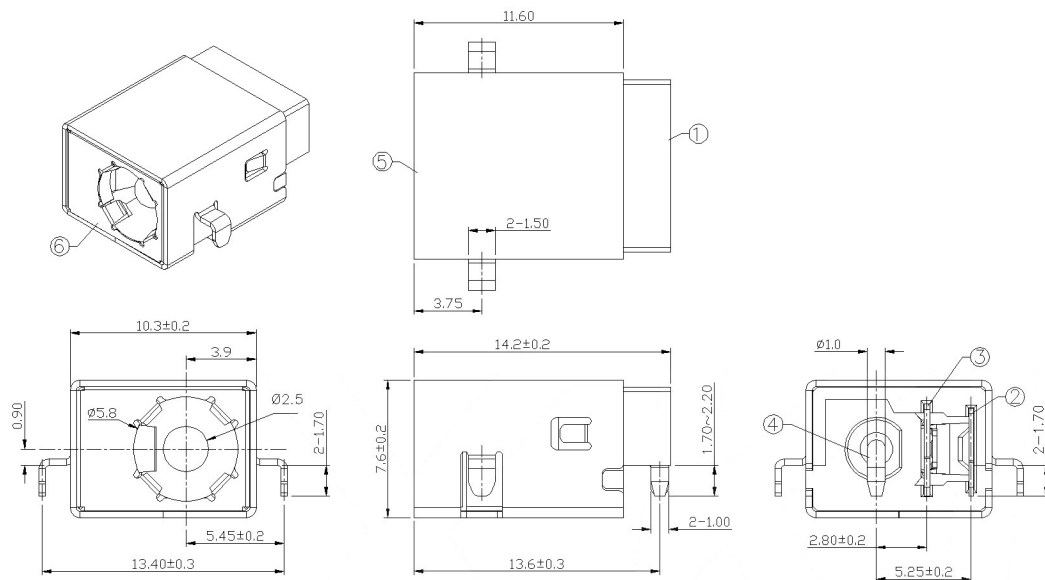


RECOMMENDED PLUG

SPECIFICATION
 1.Rating : DC 20V 5.5A;
 2.Contact resistance: $\leq 0.03\Omega$;
 3.Insulation resistance: $\geq 100M\Omega$
 (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction
 force: 3-30N;
 6.life test: 5,000 cycles.

SCHEMATIC	
Model	DC-C033D-5.5A
Center Pin	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
center pin	Brass	tin
coat	Sus	
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Brass	tin
plastic	Pa9t	

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK
△X					XX	±0.2mm	DWN		DATE		VIEW:	PART NO.:
△X					X.XX	±0.1mm	CHKD		DATE		UNIT: mm	DWG NO.:
△X					X.XXX	±0.05mm	APPD		DATE		SIZE: A4	DC-C033D-5.5A-2.5
MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	KOSOD TECHNOLOGY CO., LTD					WEIGHT 1.0g
www.bodongkaiguan.net		www.ksdkg.com									SHEET 1/1	REVISION A0