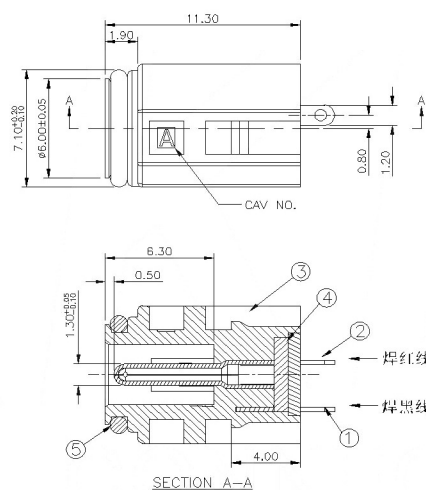



1. CONTACT CURRENT RATING: 1.5A.
2. CONTACT RESISTANCE: 60 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 2.94~29.4N(0.30~3.00Kgf);
7. CONNECTOR UNMATING FORCES: 2.94~29.4N(0.30~3.00Kgf);
8. WATERPROOF STRENGTH: IP=X7.

	MATERIAL	PLATING
plastic	Pa66	
bond		
center pin	Brass	tin
terminal 2	Brass	tin
terminal 3	Phosphor Bronze	tin

							DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK	
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:	
△ X					X.X	±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.: DC-F745	
△ X					X.XX	±0.1mm	APPD		DATE		SIZE: A4		
△ X					X.XXX	±0.05mm							
MARK	DESCRIPTION				DATE	REVISED	APPROVED						
REVISIONS							UNSPECIFIED TOLERANCES						
www.bodongkaiguan.net							Kosod Technology Co., Ltd.				WEIGHT 1.0g	SHEET 1/1	REVISION A0