



RoHS Complied




- SPECIFIATIONS:
 1. RATED: 12V, 1A
 2. CONTACT RESISTANCE: 30mΩ OR LESS FOR INITIAL
 3. VOLTAGE PROOF: 500V AC FOR ONE MINUTE
 4. DURABILITY: 5,000 INSERTION/EXTRACTION CYCLES
 5. ACTION FORCE: 3.0KG MAX
 6. WITHSTAND FORCE: 0.5KG MIN
 7. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(In_30min)
 8. SOLDER PLUG: #13MM, 3-POLE STEREO
 9. OVAL RING
 9-1 Hardness of silicone rubber: 70
 9-2 Horizontal flash 0.10mm max. Longitudinal flash 0.10mm max
 10. MOUNTING WITH O-RING'S SEAL AREA BURRS: 0.020mm MAX.
 11. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 12. PROTECTIVE TAPE & REEL.




OVAL RING




Recommended PCB Layout(T=1.2)
 Tolerance: ±0.05(TOP view)

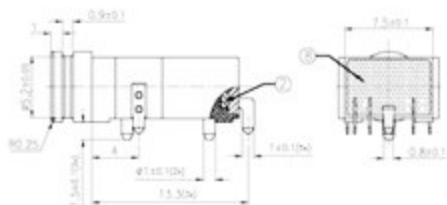

□: TERMINAL NO.



For and on behalf of

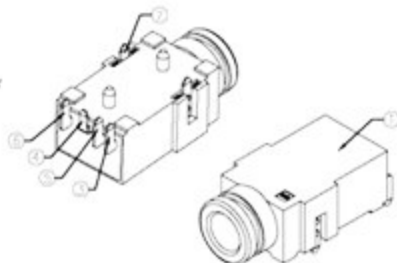

○	SWL RING	----	1	SILICONE	GREEN	
○	BOND	----	1	(POY)	----	
○	TERMINAL	----	2	CU99.99-0.1-0.2		
○	TOP SPRING-2	④	1	CU210W-EH 1-0.2		Water 5~ 80°C Min. W 45°C Min. underpack
○	RING SPRING	③	1	CU210W-EH 1-0.2		
○	TOP SPRING-1	②	1	CU210W-EH 1-0.2		
○	BATTERY SPRING	①	1	CU210W-EH 1-0.2		
○	COVER	----	1	FRP+3100(20130)	UL 94V-0	
○	O-RING	----	1	FRP+3100(20130)	UL 94V-0	

ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK
DSND		DATE	SCALE: NA	MODEL TYPE:	3.5 PHONE JACK
DWN		DATE	VIEW: ②	PART NO.:	PJ-32434
CHKD		DATE	UNIT: mm	DWG NO.:	PJ-32434
APPD		DATE	SIZE: A4	WIGHT	1.0g
				SHEET	1/1
				REVISION	A0

RE: *(Signature)*

UNSPECIFIED TOLERANCES

THIS DOCUMENT IS THE PROPERTY OF CHANGHENG ELECTRONICS CO., LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER

KOSOD TECHNOLOGY CO., LTD

WIGHT 1.0g SHEET 1/1 REVISION A0