
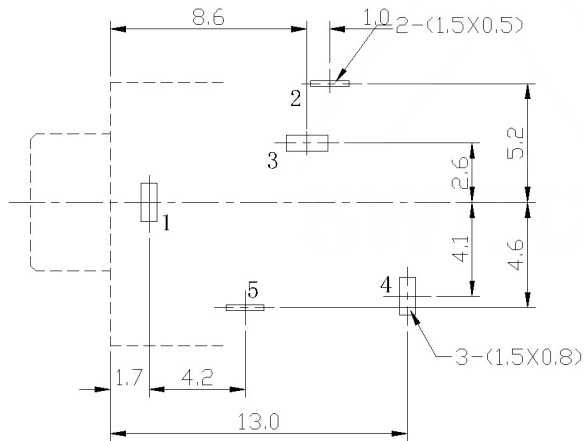


- DC 30V 0.5A;
 2.Contact resistance: $\leq 0.03\Omega$;
 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-20N;
 6.life test: 5,000 cycles.

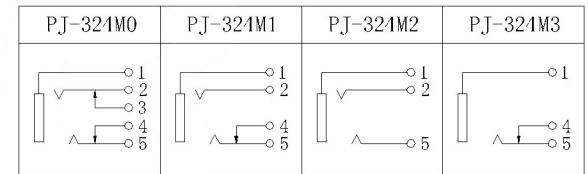

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

						DSND		DATE		SCALE: N/A	MODEL TYPE:		
						DWN		DATE		VIEW:	3.5 PHONE JACK		
						CHKD		DATE		UNIT: mm	PART NO.:		
						APPD		DATE		SIZE: A4	DWG NO.:		
						UNSPECIFIED TOLERANCES					PJ-324MX		
											KOSOD TECHNOLOGY CO., LTD		
											1.0g	1/1	A0

REVISIONS

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGULAR	TOLERANCE
Δ X					±5°	±0.2mm
Δ X					X.XX	±0.1mm
Δ X					X.XXX	±0.05mm