


NOTES:

- CONTACT CURRENT RATING: 12V 1A.
- CONTACT RESISTANCE: 50mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN.500V DC;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.
- CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.
- THE PRODUCT MACHINE WITH A GAP THAT:
THE FINISHED MACHINE WITH SOCKET BEFORE/
UP/DOWN/LEFT/RIGHT SIDE OF 5.PROTECTION GAP
FIRST PROPOSED THE DESING OF 0.15mm.

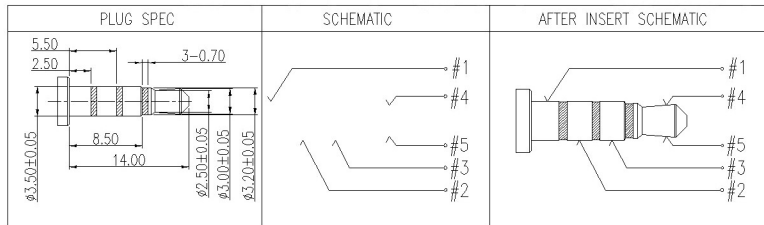

NO.	DESCRIPTION	MAT.L	COLOR	REMARK
8	GLUE WATER	EPOXY	BLACK	————
7	Cover	HIGH TEMP	BLACK	————
6	Housing	HIGH TEMP	BLACK	————
5	TERMINAL-5	COPPER ALLOY	————	Au PLATED
4	TERMINAL-4	COPPER ALLOY	————	Au PLATED
3	TERMINAL-3	COPPER ALLOY	————	Au PLATED
2	TERMINAL-2	COPPER ALLOY	————	Au PLATED
1	TERMINAL-1	COPPER ALLOY	————	Au PLATED

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
Δx					ANGULAR X.X	DWN	DATE	VIEW:	PART NO.:
Δx					±5° ±0.2mm	CHKD	DATE	UNIT: mm	DWG NO.:
Δx					X.XX ±0.1mm	APPD	DATE	SIZE: A4	PJ-3257
					X.XXX ±0.05mm				WEIGHT
									1.0g
									SHEET
									1/1
									REVISION
									A0