



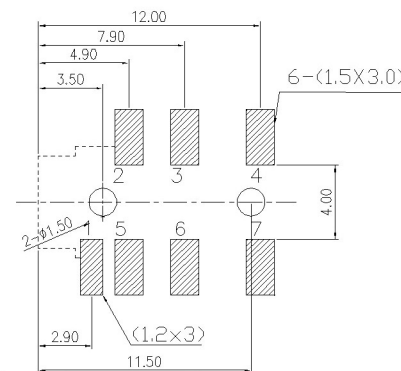



PCB LAYOUT TOP VIEW

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 1-1. RATING:
 1-2. CONTACT RESISTANCE: $30\text{m}\Omega$ MAX.(INITIAL)
 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 1-4. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN. MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
 2-1. INSERTION FORCE : $0.3\sim 3.0$ KGF
 2-2. WITHDRAWAL FORCE : $0.3\sim 3.0$ KGF
3. LIFE TEST: 5,000 CYCLES MIN.
4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
5. * REPRESENT CRITICAL DIMENSIONS.



CIRCUIT DIAGRAM

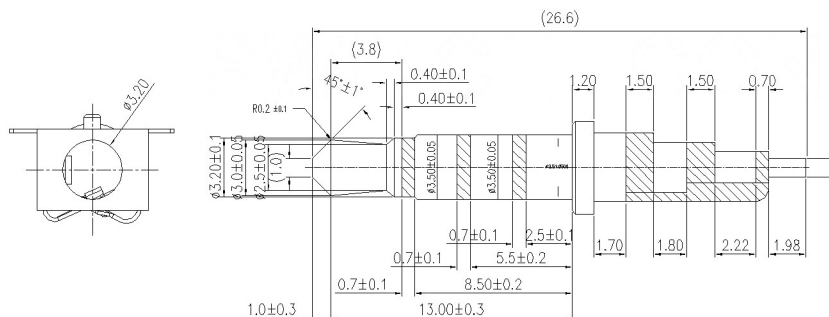

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	Gold
terminal 2	Phosphor Bronze	Gold
terminal 3	Phosphor Bronze	Gold
terminal 4	Phosphor Bronze	Gold
terminal 5	Phosphor Bronze	Gold
terminal 6	Phosphor Bronze	Gold
terminal 7	Phosphor Bronze	Gold
plastic	High Temp. Thermoplastic	

							DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△x					X.X	±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:		
△x					X.XX	±0.1mm	APPD		DATE		SIZE: A4	PJ-3507		
△x					X.XXX	±0.05mm								
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
REVISIONS							UNSPECIFIED TOLERANCES							
www.bodongkaiguan.net www.ksdkg.com							KOSOD TECHNOLOGY CO., LTD					WEIGHT	SHEET	REVISION
												1.0a	1/1	A0