
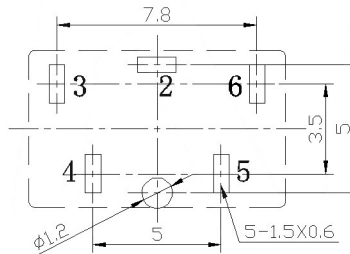


Temperature -20~70 C
 Rated Load DC 30V 0.3A
 Contact Resistance <math><0.03\Omega</math>
 Insulation Resistance >100M Ω
 Withstand Voltage AC500V(50Hz)/min
 Actuating Force 2.2~30N
 Life 5000次

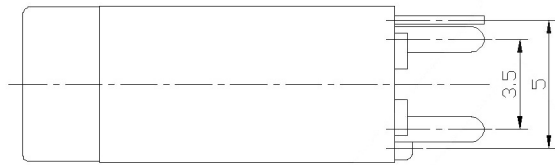

Model No.	PJ-3582-	PJ-3583-
Schematic		
color	B:Black W:White	

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	silver
terminal 3	Phosphor Bronze	silver
terminal 4	Phosphor Bronze	silver
terminal 5	Phosphor Bronze	silver
terminal 6	Phosphor Bronze	silver
plastic	Pbt	

				DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
				ANGLAR		DATE		VIEW:	PART NO.:		
Δ X				X.X		DATE		UNIT: mm	DWG NO.: PJ-358X-X		
Δ X				X.XX		DATE		SIZE: A4			
Δ X				X.XXX		DATE					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	KOSOD TECHNOLOGY CO., LTD			WEIGHT 1.0g	SHEET 1/1	REVISION A0
				www.bodongkaiguan.net www.ksdkg.com							