



Circuit Diagram □: Terminal No.

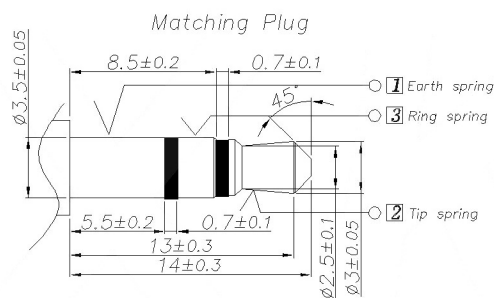


RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(BOTTOM VIEW)

CODE	PLATING
-B	Bushing & Nut (Ni Plated) Terminal (Ag Plated)
-D	Bushing & Nut (Ni Plated) Terminal (Au Plated)
-F	Bushing & Nut (Au Plated) Terminal (Au Plated)

Specification:

- Rating : DC 30V 0.5A.
- Contact resistance: ≤30mΩ.
After test: ≤50mΩ.
- Insulation resistance: ≥100MΩ (500VDC).
After test: ≥50MΩ.
- Withstanding voltage: 500VAC.
- Insertion and extraction force: 3N~30N.
- life test: 500Cycles min.
- Operation temperature range: -20°C ~ 70°C.
- Preservative temperature range: -40°C ~ 85°C.
- Sign "▲" is importance dimension.



	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

					ANGULAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE:	
ΔX					X.X	±0.2mm	DWN	DATE	VIEW:	3.5 PHONE JACK	
ΔX					X.XX	±0.1mm	CHKD	DATE	UNIT: mm	PART NO.:	
ΔX					X.XXX	±0.05mm	APPD	DATE	SIZE: A4	DWG NO.:	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		Kosod Technology Co., Ltd.			PJ-392W-X	
www.bodongkaiguan.net		REVISIONS		www.ksdkg.com					WEIGHT	SHEET	REVISION
									1.0g	1/1	A0