

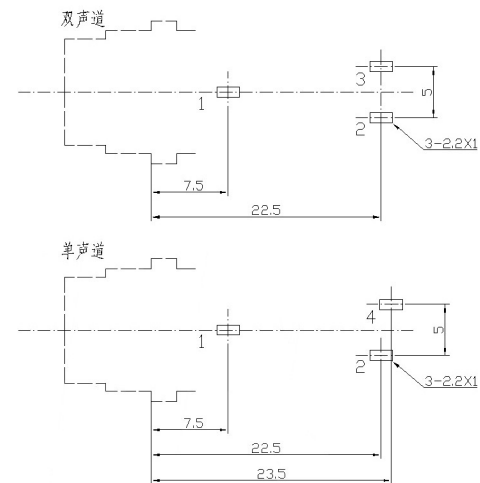


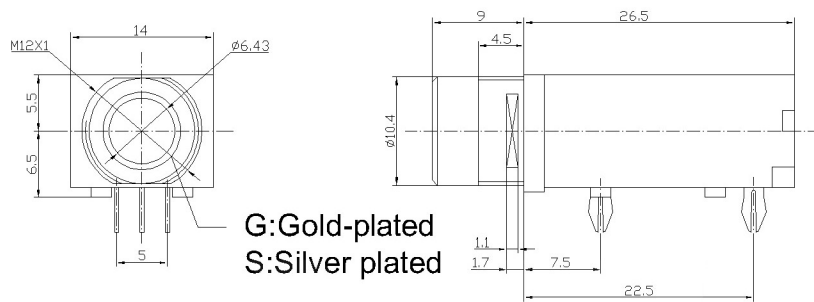

SCHEMATIC

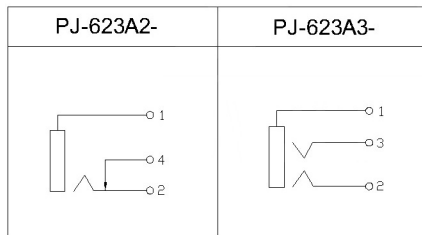

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 50m\Omega$;
3. Insulation resistance: $> 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles.

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PBT	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR
ΔX					$L \leq 4$
ΔX					$4 < L \leq 16$
					$16 < L \leq 63$
					$L > 63$

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW: $\oplus$	6.5 PHONE JACK
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
KOSOD TECHNOLOGY CO., LTD			REVISION
			1.0g
			1/1
			A0

PJ-623AX-X