
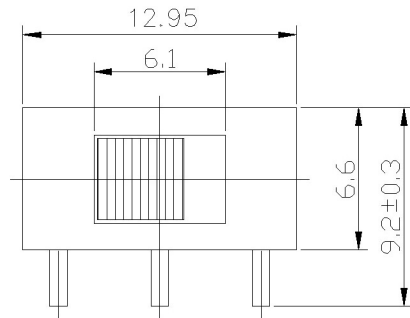





MODEL CODE

SS-12D06-X-X-X

Knob Type	H (mm)	Colour
L	2 ~ 12	B:Black
G		R:Red

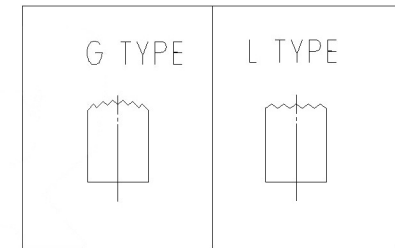

P. C. B LAYOUT

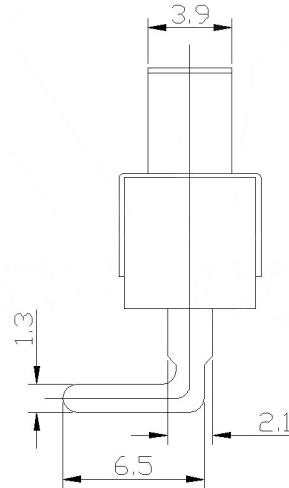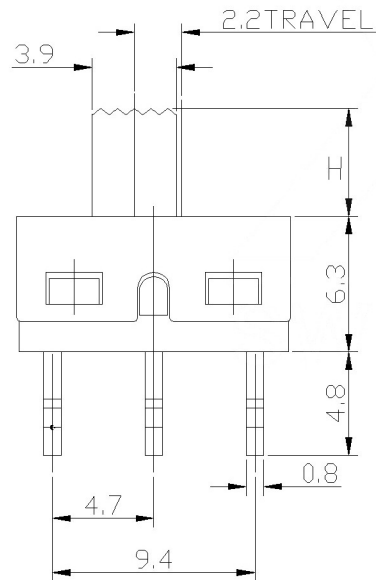

SCHEMATIC

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR X.X ±5°
ΔX					X.XX ±0.2mm
ΔX					X.XXX ±0.1mm
ΔX					X.XXX ±0.05mm
www.bodongkaiguan.net www.ksdkg.com					

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	SLIDE SWITCH
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
KOSOD TECHNOLOGY CO., LTD			SS-12D06-XX-X
WEIGHT 1.0g		SHEET 1/1	REVISION A0