
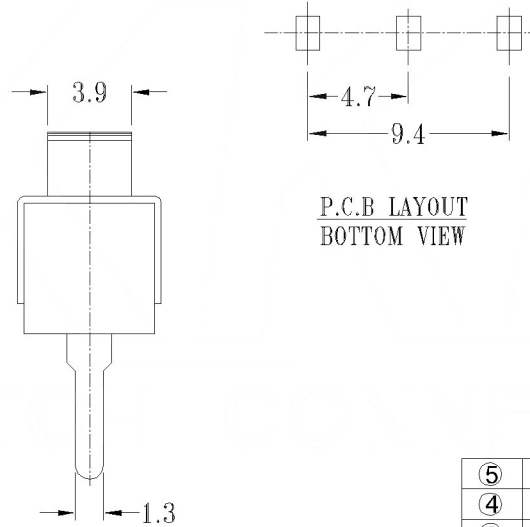
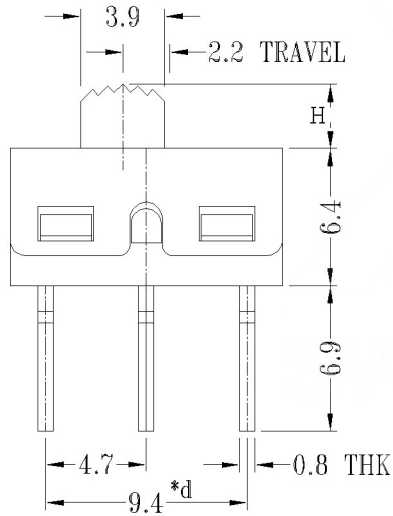


SCHMATIC (NON-SHORTING)

MODEL CODE

SS-12D10-X-X-X

| | | |
|-----------|--------|---------|
| Knob Type | H (mm) | Colour |
| L | 2 ~ 12 | B:Black |
| G | | R:Red |

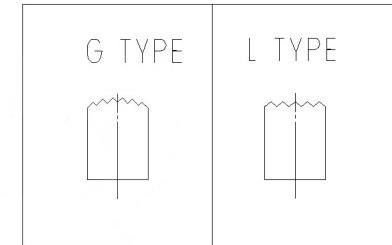

P.C.B LAYOUT
BOTTOM VIEW

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance: 1,000M min
3. Dielectric Strength: 1,500V RMS
4. Operating Life : 10,000 cycles

| ⑤ | Terminal | — | 3 | Copper Alloy | silver plated | — |
|------|--------------|--------|-----|-------------------------|---------------|--------|
| ④ | Contact | — | 1 | Copper Alloy | silver plated | — |
| ③ | Housing | — | 1 | Stainless Steel | | — |
| ② | Slide Handle | — | 1 | Nylon | | — |
| ① | Case | — | 1 | Diallyl Phthalate (DAP) | | — |
| ITEM | PAPT NAME | TER.NO | QTY | MATERIAL | FINISHING | REMARK |

| | | | | | | | | | | | | | |
|------|-------------|------|---------|----------|------------------------|---------|---------------------------|--|------|--|------------|-----------------------------|----------|
| | | | | | ANGLAR | ±5° | DSND | | DATE | | SCALE: N/A | MODEL TYPE: SLIDE SWITCH | |
| Δx | | | | | X.X | ±0.2mm | DWN | | DATE | | VIEW: | PART NO.: | |
| Δx | | | | | X.XX | ±0.1mm | CHKD | | DATE | | UNIT: mm | DWG NO.: | |
| Δx | | | | | X.XXX | ±0.05mm | APPD | | DATE | | SIZE: A4 | SS-12D10-XX-X | |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES | | KOSOD TECHNOLOGY CO., LTD | | | | WEIGHT | SHEET | REVISION |
| | | | | | | | | | | | 1.0g | 1/1 | A0 |