

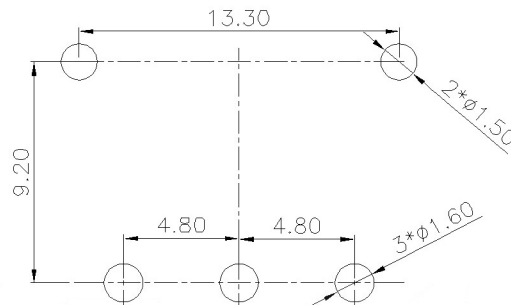
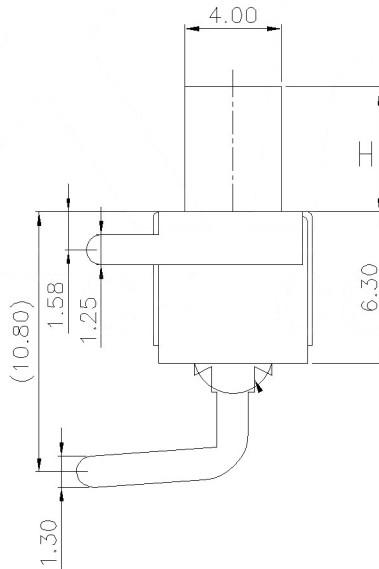
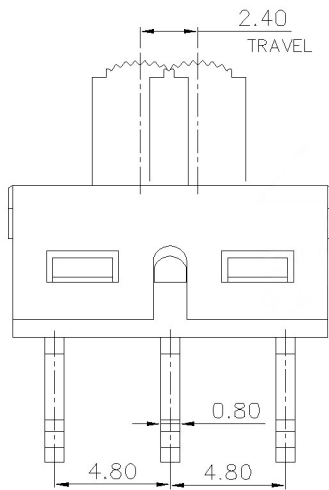


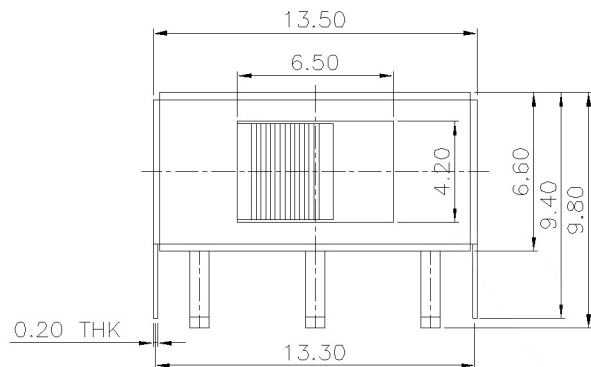

P.C.B layout




MODEL CODE

SS-12D11-X-X-X

Knob Type
L
G

H (mm)
2 ~ 12

Colour
B:Black
R:Red

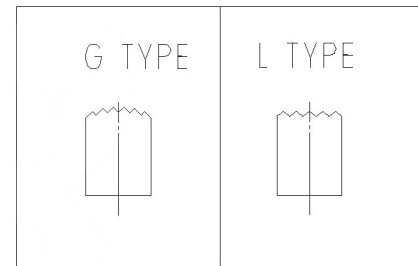

Typical Specifications

1. Rating : AC120V5A
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

					ANGULAR	±5°
△X					X.X	±0.2mm
△X					X.XX	±0.1mm
△X					X.XXX	±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
REVISIONS						
www.bodongkaiguan.net www.ksdkg.com						

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	SLIDE SWITCH
CHKD		DATE		UNIT: mm	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
KOSOD TECHNOLOGY CO., LTD					SS-12D11-XX-X
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	