

SCHMATIC



MODEL CODE

SS-12D16---

Knob Type	L
G	

H (mm)	2 ~ 12
--------	--------

Colour	B:Black
	R:Red

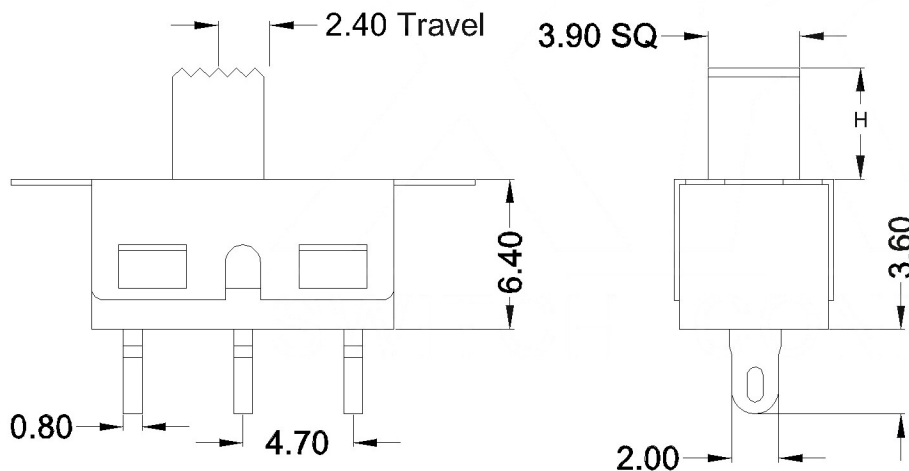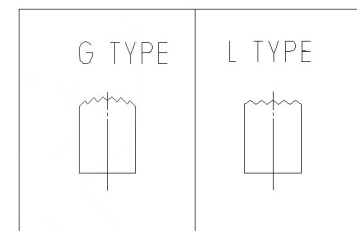

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	---	3	Copper Alloy	silver plated	---
④	Contact	---	1	Copper Alloy	silver plated	---
③	Housing	---	1	Stainless Steel		---
②	Slide Handle	---	1	Nylon		---
①	Case	---	1	Diallyl Phthalate (DAP)		---
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						ANGLAR	±5°
△x						X.X	±0.2mm
△x						X.XX	±0.1mm
△x						X.XXX	±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED		UNSPECIFIED TOLERANCES	
						www.bodongkaiguan.net www.ksdkg.com	

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	SS-12D16-XX-X
				Kosod Technology Co., Ltd.	WEIGHT 1.0g
					SHEET 1/1
					REVISION A0