

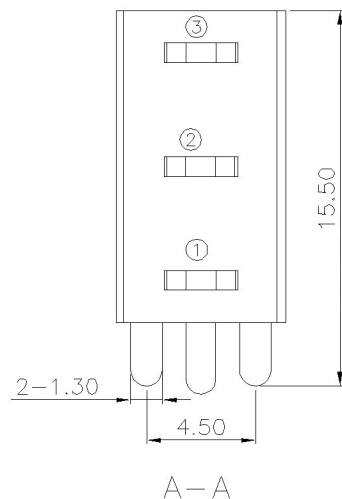
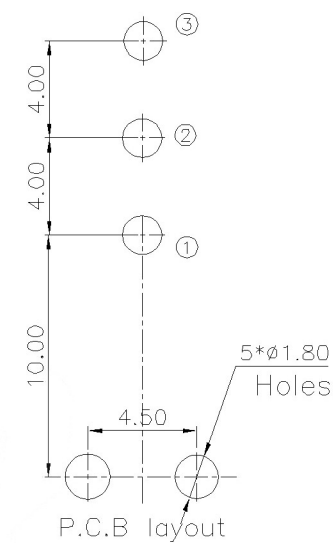
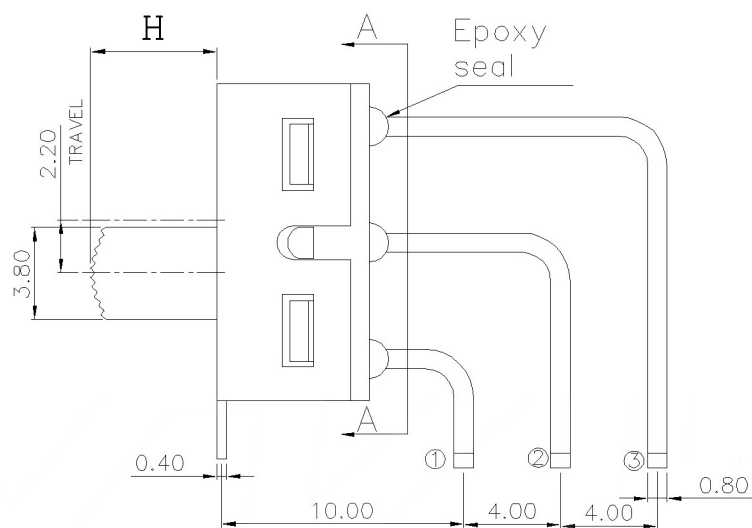
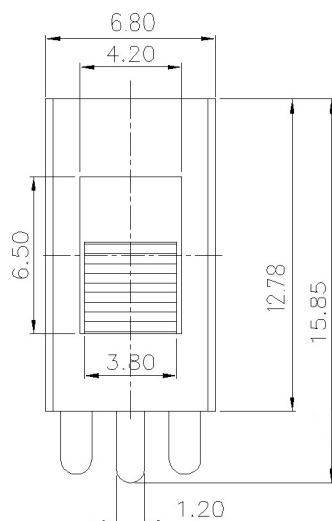




MODEL CODE

SS-12D28-X X

Knob Type	H (mm)
L	3 ~ 12
G	



Schematic(Shorting)

- Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGULAR	±5°
△x					X.X	±0.2mm
△x					X.XX	±0.1mm
△x					X.XXX	±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES	
www.bodongkaiguan.net					www.ksdkg.com	

DSND	DATE	SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	SS-12D28-XX
Kosod Technology Co., Ltd.			WEIGHT: 1.0g
			SHEET: 1/1
			REVISION: A0