




SCHMATIC

CL CODE

SS-23H10 -

L (mm)
~

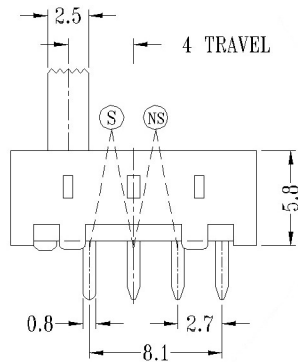

P.C.B. LAYOUT
BOTTOM VIEW

6	SPRING PLATE	PBS STRIP	2	NATURAL
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100m MAX.
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE<cycles>	10,000

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH	
DWN		DATE		VIEW:	PART NO.: SS-23H10	
CHKD		DATE		UNIT: mm	DWG NO.: SS-23H10-XX	
APPD		DATE		SIZE: A4		
				WEIGHT	SHEET	REVISION
KOSOD TECHNOLOGY CO., LTD				1.0g	1/1	A0