



Circuit diagram




Code-X	H	H1
A	3.15	4.3
B	3.85	5.0
C	4.85	6.0

SPECIFICATION

Contact Rating : 50mA, 12V DC
 Contact Resistance : 100mΩ max
 Insulation Resistance : 100mΩ min. 500V DC
 Dielectric Strength : 250V AC/1minute
 Travel : 0.25mm
 Operating Temp : -20°C ~ +70°C
 Storage Temp : -30°C ~ +80°C

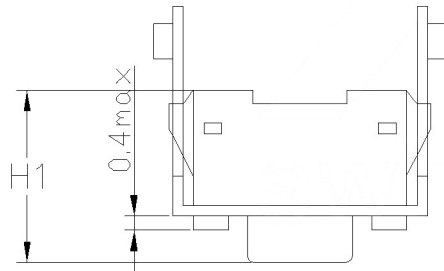

P.C.B MOUNTING HOLE DIMENSIONS

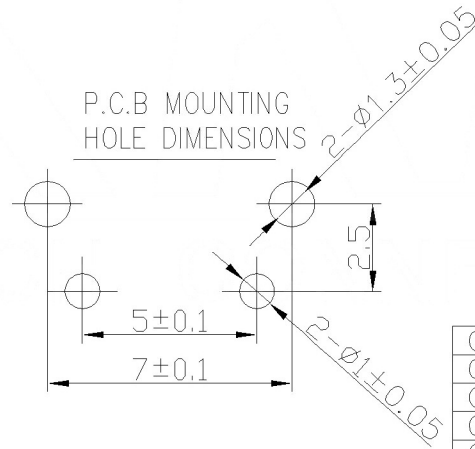

PAPT NO	TC-1101V-X-X-X
Operating Force A:	100gf B: 160gf C: 260gf
Height	Code-X
color	B:black W:white

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46	—	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					units: mm
Δx					tolerance: X.X ±0.2mm
Δx					X.XX ±0.1mm
					X.XXX ±0.05mm

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	TACT SWITCH
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
			TC-1101V-X-X-X
Kosod Technology Co., Ltd.			WEIGHT SHEET REVISION
			1.0g 1/1 A0