


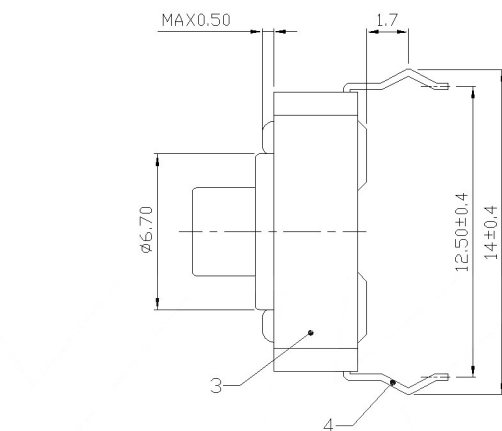


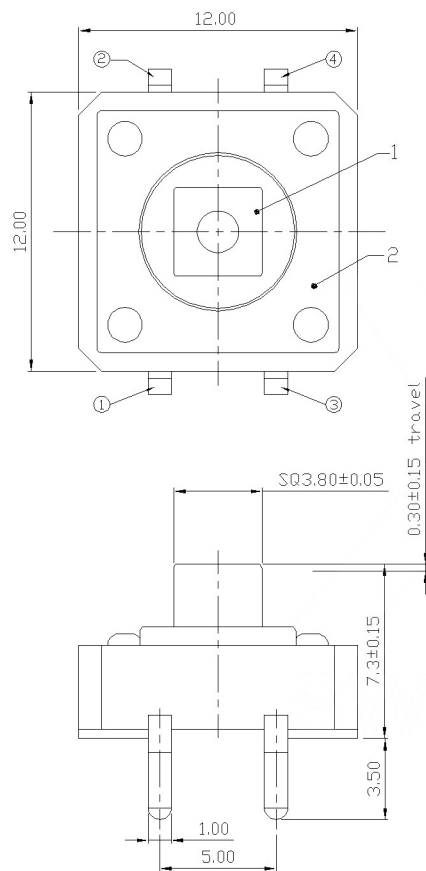

P.C.B MOUNTING PATTERN DIMENSION

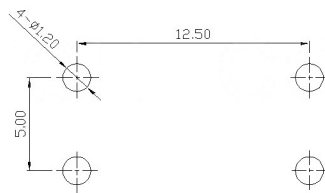

CIRCUIT DIAGRAM



SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30°C ~ +85°C
Storage Temp:	-30°C ~ +80°C

PAPT NO	TC-1103T-X-X
Operating force	B: 160gf C: 260gf
Height	H: 7.3
color	B: Black Y: Yellow

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					units: mm
Δ X					tolerance:
Δ X					X.X ±0.2mm
Δ X					X.XX ±0.1mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm
REVISIONS					
UNSPECIFIED TOLERANCES					
www.bodongkaiguan.net www.ksdkg.com					

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
KOSOD TECHNOLOGY CO., LTD					TC-1103T-X-X
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	